




contents

| | |
|---|--------------|
| Introduction | 7/2 |
| For Operation in the Control Cabinet 3RW Soft Starters | |
| General data | 7/3 |
| 3RW30 for standard applications | |
| Overview | 7/4 |
| Application | 7/4 |
| Selection and ordering data | 7/5 |
| Accessories | 7/6 |
| Application examples | 7/7 |
| Function | 7/44 |
| Technical specifications | 7/45 - 7/54 |
| Dimensional drawings | 7/91 |
| Schematics | 7/96 |
| 3RW40 for standard applications | |
| Overview | 7/8 |
| Application | 7/8 |
| Selection and ordering data | 7/9 - 7/11 |
| Accessories | 7/12 - 7/13 |
| Application examples | 7/14 |
| Function | 7/55 |
| Technical specifications | 7/56 - 7/69 |
| Dimensional drawings | 7/92 |
| Schematics | 7/97 - 7/98 |
| 3RW44 for high-feature applications | |
| Configuration | 7/15 |
| Overview | 7/16 |
| Application | 7/16 |
| Selection and ordering data | 7/17 - 7/19 |
| Sirius ES engineering software | 7/20 - 7/24 |
| Accessories | 7/25 - 7/26 |
| Application examples | 7/27 - 7/29 |
| Function | 7/70 |
| Technical specifications | 7/71 - 7/90 |
| Dimensional drawings | 7/93 - 7/94 |
| Schematics | 7/99 - 7/102 |
| Class 73/74 Enclosed Softstarter applications | |
| Overview | 7/30 |
| Application | 7/30 |
| Selection and ordering data | 7/31 - 7/42 |
| Factory Modifications | 7/43 |
| Dimensional drawings | 7/95 |
| Schematics | 7/103 |

Introduction

Overview

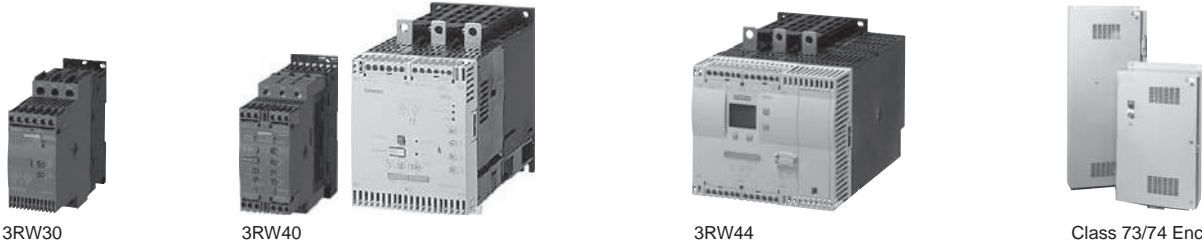

3RW30

3RW40

3RW44

Class 73/74 Enclosed

Order No. Page

For operation in the control cabinet

3RW soft starters for standard applications

| | | | |
|----------------------------|---|--------------|-----|
| | <ul style="list-style-type: none"> Application areas <ul style="list-style-type: none"> - Fans - Building/construction machines - Escalators - Air conditioning systems - Assembly lines - Operating mechanisms - Pumps - Presses - Transport systems - Fans - Compressors and coolers | | |
| 3RW30 soft starters | <ul style="list-style-type: none"> SIRIUS 3RW30 soft starters for soft starting and smooth ramp-down of three-phase asynchronous motors Performance range of up to 75 Hp (at 460 V) | 3RW30 | 7/4 |
| 3RW40 soft starters | <ul style="list-style-type: none"> SIRIUS 3RW40 soft starters with the integral functions <ul style="list-style-type: none"> - Solid-state motor overload and intrinsic device protection and - Adjustable current limiting for the soft starting and stopping of three-phase asynchronous motors Performance range of up to 300 Hp (at 460 V) | 3RW40 | 7/8 |

3RW soft starters for high-feature applications

| | | | |
|----------------------------|--|--------------|------|
| | <ul style="list-style-type: none"> Application areas <ul style="list-style-type: none"> - Pumps - Compressors - Industrial refrigerating systems - Conveying systems - Machine tools - Fans - Cooling systems - Water transport - Hydraulics - Mills | | |
| 3RW44 soft starters | <ul style="list-style-type: none"> In addition to soft starting and soft ramp-down, the solid-state SIRIUS 3RW44 soft starters provide numerous functions for higher-level requirements Performance range <ul style="list-style-type: none"> - Up to 900 Hp (at 460 V) in inline circuit and - Up to 1600 Hp (at 460 V) in inside-delta circuit | 3RW44 | 7/16 |

For enclosed applications

| | | | |
|---|--|--------------------|------|
| Enclosures in NEMA 1, 3, 4, & 12 types UL/CSA listed | <ul style="list-style-type: none"> Complete starter includes 3RW40 or 3RW44 and CPT Performance Range of up to 600 Hp (at 460 V) Combination options include circuit breaker or fusible disconnect | Class 73/74 | 7/83 |
| | <ul style="list-style-type: none"> Application areas: <ul style="list-style-type: none"> - Compressors - Pumps - Stamping presses - Cooling towers - Molding and extruding - Chippers and debarkers - Lumber processing - Pulp & paper processing - Conveyors - Textiles - HVAC | | |


3RW Soft Starters

General Data

Overview

The advantages of the SIRIUS soft starters at a glance:

- Soft starting and smooth ramp-down¹⁾
- Stepless starting
- Reduction of current peaks
- Avoidance of mains voltage fluctuations during starting
- Reduced load on the power supply network
- Reduction of the mechanical load in the operating mechanism
- Considerable space savings and reduced wiring compared with conventional starters
- Maintenance-free switching
- Very easy handling
- Fits perfectly in the SIRIUS modular system

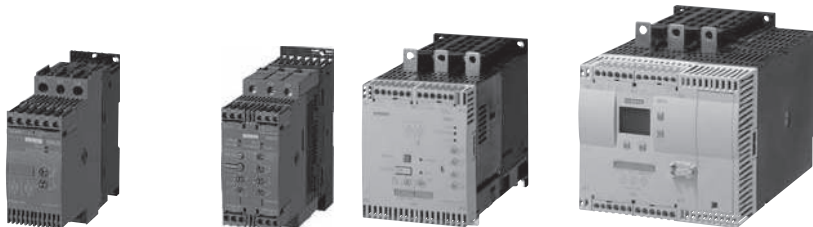

| | | SIRIUS 3RW30 Standard applications | SIRIUS 3RW40 Standard applications | SIRIUS 3RW44 High-Feature applications |
|---|----|---------------------------------------|---------------------------------------|---|
| Rated current up to 50 °C | A | 3 ... 98 | 11 ... 385 | 26 ... 1076 |
| Rated operational voltage | V | 200 ... 480 | 200 ... 600 | 200 ... 690 |
| Motor rating at 460 V | | | | |
| • Inline circuit | Hp | 1.5 ... 75 | 7.5 ... 300 | 15 ... 900 |
| • Inside-delta circuit | Hp | -- | -- | 22 ... 1600 |
| Ambient temperature | °C | -25 ... +60 | -25 ... +60 | 0 ... +60 |
| Soft starting/ramp-down | | ✓ ¹⁾ | ✓ | ✓ |
| Voltage ramp | | ✓ | ✓ | ✓ |
| Starting/stopping voltage | % | 40 ... 100 | 40 ... 100 | 20 ... 100 |
| Starting and ramp-down time ⁷⁾ | s | 0 ... 20 | 0 ... 20 | 1 ... 360 |
| Torque control | | -- | -- | ✓ |
| Starting/stopping torque | % | -- | -- | 20 ... 100 |
| Torque limit | % | -- | -- | 20 ... 200 |
| Ramp time | s | -- | -- | 1 ... 360 |
| Integral bypass contact system | | ✓ | ✓ | ✓ |
| Intrinsic device protection | | -- | ✓ | ✓ |
| Motor overload protection | | -- | ✓ | ✓ |
| Thermistor motor protection | | -- | ✓ ²⁾ | ✓ |
| Integrated remote RESET | | -- | ✓ ³⁾ | ✓ |
| Adjustable current limiting | | -- | ✓ | ✓ |
| Inside-delta circuit | | -- | -- | ✓ |
| Breakaway pulse | | -- | -- | ✓ |
| Creep speed in both directions of rotation | | -- | -- | ✓ |
| Pump ramp-down | | -- | -- | ✓ ⁴⁾ |
| DC braking | | -- | -- | ✓ ^{4) 5)} |
| Combined braking | | -- | -- | ✓ ^{4) 5)} |
| Motor heating | | -- | -- | ✓ |
| Communication | | -- | -- | With PROFIBUS DP (optional) |
| External display and operator module | | -- | -- | (optional) |
| Operating measured value display | | -- | -- | ✓ |
| Error logbook | | -- | -- | ✓ |
| Event list | | -- | -- | ✓ |
| Slave pointer function | | -- | -- | ✓ |
| Trace function | | -- | -- | ✓ ⁶⁾ |
| Programmable control inputs and outputs | | -- | -- | ✓ |
| Number of parameter sets | | 1 | 1 | 3 |
| Parameterization software (Soft Starter ES) | | -- | -- | ✓ |
| Power semiconductors (thyristors) | | 2 controlled phases | 2 controlled phases | 3 controlled phases |
| Screw terminals | | ✓ | ✓ | ✓ |
| Spring-type terminals | | ✓ | ✓ | ✓ |
| UL/CSA | | ✓ | ✓ | ✓ |
| CE marking | | ✓ | ✓ | ✓ |
| Soft starting under heavy starting conditions | | -- | -- | ✓ ⁴⁾ |

Configuring support

Win-Soft Starter, Electronic Application Selector, Technical Assistance Tel.: 1-800-333-7421

✓ Function is available; -- Function is not available.

¹⁾ Only soft starting available for 3RW30.

²⁾ Optional up to size S3 (device variant).

³⁾ Available for 3RW40 2.. to 3RW40 4., optional for 3RW40 5. and 3RW40 7..

⁴⁾ Calculate soft starter and motor with size allowance where required.

⁵⁾ Not possible in inside-delta circuit.

⁶⁾ Trace function with Soft Starter ES software.

⁷⁾ Actual motor start times are load dependent.

You can find further information on the Internet at:

www.usa.siemens.com/softstarters

3RW Soft Starters

3RW30 for standard applications

Overview

The SIRIUS 3RW30 soft starters reduce the motor voltage through variable phase control and increase it in ramp-like mode from a selectable starting voltage up to mains voltage. During starting, these devices limit the torque as well as the current and prevent the shocks which arise during direct starts or wye-delta starts. In this way, mechanical loads and mains voltage dips can be reliably reduced.

Soft starting reduces the stress on the connected equipment and results in lower wear and therefore longer periods of trouble-free production. The selectable start value means that the soft starters can be adjusted individually to the requirements of the application in question and unlike wye-delta starters are not restricted to two-stage starting with fixed voltage ratios.¹⁾

The SIRIUS 3RW30 soft starters are characterized above all by their small space requirements. Integrated bypass contacts mean that minimal power loss is used at the power semiconductors (thyristors) after the motor has started up. This cuts down on heat losses, enabling a more compact design and making external bypass circuits superfluous.

Various versions of the SIRIUS 3RW30 soft starters are available:

- Standard version for fixed-speed three-phase motors, sizes S00, S0, S2 and S3, with integrated bypass contact system
- Version for fixed-speed three-phase motors in a 22.5 mm enclosure without bypass

Soft starters rated up to 75 Hp (at 460 V) for standard applications in three-phase networks are available. Extremely small sizes, low power losses and simple start-up are just three of the many advantages of this soft starter.

¹⁾ Actual motor start times are load dependent.

Application

The 3RW30 soft starters are suitable for soft starting of three-phase asynchronous motors.

Due to two-phase control, the current is kept at minimum values in all three phases throughout the entire starting time. Due to continuous voltage influencing, current and torque peaks, which are unavoidable in the case of wye-delta starters, for instance, do not occur.

Application areas

- Pumps
- Heat pumps
- Hydraulic pumps
- Presses
- Conveyors
- Roller conveyor
- Screw conveyors

3RW Soft Starters

3RW30 for standard applications

Selection and ordering data



| Ambient temperature 40 °C | | | | Ambient temperature 50 °C | | | | Size | Order No. | List Price \$ per PU | PS* | Weight per PU approx. |
|---|---|-------------|-------|--------------------------------------|---|-------|-------|-------|------------|-----------------------|--------|-----------------------|
| Rated operational current $I_e^{1)}$ | Rated power of induction motors for rated operational voltage U_e | | | Rated operational current $I_e^{1)}$ | Rated power of induction motors for rated operational voltage U_e | | | | | | | |
| A | 230 V | 400 V | 500 V | A | 200 V | 230 V | 460 V | 575 V | | | | |
| | kW | kW | kW | | hp | hp | hp | hp | | | | |
| Rated operational voltage U_e 200 ... 480 V | | | | | | | | | | | | |
| • With screw terminals | | | | | | | | | | | | |
| 3.6 | 0.75 | 1.5 | -- | 3 | 0.5 | 0.5 | 1.5 | -- | S00 | 3RW30 13-1BB□4 | 1 unit | 0.580 |
| 6.5 | 1.5 | 3 | -- | 4.8 | 1 | 1 | 3 | -- | S00 | 3RW30 14-1BB□4 | 1 unit | 0.580 |
| 9 | 2.2 | 4 | -- | 7.8 | 2 | 2 | 5 | -- | S00 | 3RW30 16-1BB□4 | 1 unit | 0.580 |
| 12.5 | 3 | 5.5 | -- | 11 | 3 | 3 | 7.5 | -- | S00 | 3RW30 17-1BB□4 | 1 unit | 0.580 |
| 17.6 | 4 | 7.5 | -- | 17 | 3 | 3 | 10 | -- | S00 | 3RW30 18-1BB□4 | 1 unit | 0.580 |
| • With spring-type terminals | | | | | | | | | | | | |
| 3.6 | 0.75 | 1.5 | -- | 3 | 0.5 | 0.5 | 1.5 | -- | S00 | 3RW30 13-2BB□4 | 1 unit | 0.580 |
| 6.5 | 1.5 | 3 | -- | 4.8 | 1 | 1 | 3 | -- | S00 | 3RW30 14-2BB□4 | 1 unit | 0.580 |
| 9 | 2.2 | 4 | -- | 7.8 | 2 | 2 | 5 | -- | S00 | 3RW30 16-2BB□4 | 1 unit | 0.580 |
| 12.5 | 3 | 5.5 | -- | 11 | 3 | 3 | 7.5 | -- | S00 | 3RW30 17-2BB□4 | 1 unit | 0.580 |
| 17.6 | 4 | 7.5 | -- | 17 | 3 | 3 | 10 | -- | S00 | 3RW30 18-2BB□4 | 1 unit | 0.580 |
| • With screw terminals | | | | | | | | | | | | |
| 25 | 5.5 | 11 | -- | 23 | 5 | 5 | 15 | -- | S0 | 3RW30 26-1BB□4 | 1 unit | 0.690 |
| 32 | 7.5 | 15 | -- | 29 | 7.5 | 7.5 | 20 | -- | S0 | 3RW30 27-1BB□4 | 1 unit | 0.690 |
| 38 | 11 | 18.5 | -- | 34 | 10 | 10 | 25 | -- | S0 | 3RW30 28-1BB□4 | 1 unit | 0.690 |
| • With spring-type terminals | | | | | | | | | | | | |
| 25 | 5.5 | 11 | -- | 23 | 5 | 5 | 15 | -- | S0 | 3RW30 26-2BB□4 | 1 unit | 0.690 |
| 32 | 7.5 | 15 | -- | 29 | 7.5 | 7.5 | 20 | -- | S0 | 3RW30 27-2BB□4 | 1 unit | 0.690 |
| 38 | 11 | 18.5 | -- | 34 | 10 | 10 | 25 | -- | S0 | 3RW30 28-2BB□4 | 1 unit | 0.690 |
| • With screw-type or spring-type terminals | | | | | | | | | | | | |
| 45 | 11 | 22 | -- | 42 | 10 | 15 | 30 | -- | S2 | 3RW30 36-□BB□4 | 1 unit | 1.200 |
| 63 | 18.5 | 30 | -- | 58 | 15 | 20 | 40 | -- | S2 | 3RW30 37-□BB□4 | 1 unit | 1.200 |
| 72 | 22 | 37 | -- | 62 | 20 | 20 | 40 | -- | S2 | 3RW30 38-□BB□4 | 1 unit | 1.200 |
| • With screw-type or spring-type terminals | | | | | | | | | | | | |
| 80 | 22 | 45 | -- | 73 | 20 | 25 | 50 | -- | S3 | 3RW30 46-□BB□4 | 1 unit | 1.710 |
| 106 | 30 | 55 | -- | 98 | 30 | 30 | 75 | -- | S3 | 3RW30 47-□BB□4 | 1 unit | 1.710 |
| Order No. supplement for connection types | | | | | | | | | | | | |
| • With screw terminals | | | | | | | | | | | | |
| • With spring-type terminals ²⁾ | | | | | | | | | | | | |
| Order No. supplement for rated control supply voltage U_s | | | | | | | | | | | | |
| • 24 V AC/DC | | | | | | | | | | | | |
| • 110 ... 230 V | | | | | | | | | | | | |

Soft starters for easy starting conditions and high switching frequency, rated operational voltage U_e 200 ... 400 V, rated control supply voltage U_s 24 ... 230 V AC/DC

| | | | | | | | | | | | | |
|---|------|------------|----|-----|-----|------------|----|----|---------|-----------------------|--------|-------|
| 3 | 0.55 | 1.1 | -- | 2.6 | 0.5 | 0.5 | -- | -- | 22.5 mm | 3RW30 03-1CB54 | 1 unit | 0.207 |
| | | | | | | | | | | 3RW30 03-2CB54 | 1 unit | 0.188 |

1) Stand-alone installation.
2) Main connection from size S2: screw terminals.





Note:
Selection of the soft starter depends on the rated motor current.

The SIRIUS 3RW30 solid-state soft starters are designed for easy starting conditions. $J_{Load} < 10 \times J_{Motor}$. In the event of deviating conditions or increased switching frequency, it may be necessary to choose a larger device. Siemens recommends the use of the selection and simulation program Win-Soft Starter. For information about rated currents for ambient temperatures > 40 °C, see technical specifications (see technical information on page 7/44).



3RW Soft Starters

3RW30 for standard applications

Accessories

| For soft starters | | Motor starter protectors | | Order No. | List Price \$ per PU | PS* | Weight per PU approx. kg |
|---|--|--------------------------|-----------|----------------------------|----------------------|----------|--------------------------|
| Type | Size | Size | Size | | | | |
| Auxiliary terminals | | | | | | | |
| Auxiliary terminals, 3-pole | | | | | | | |
| 3RW30 4. | S3 | | | 3RT19 46-4F | | 1 unit | 0.035 |
| Covers for soft starters | | | | | | | |
| Terminal covers for box terminals | | | | | | | |
| Additional touch protection to be fitted at the box terminals (2 units required per device) | | | | | | | |
|  | 3RW30 3. | S2 | | 3RT19 36-4EA2 | | 1 unit | 0.020 |
| | 3RW30 4. | S3 | | 3RT19 46-4EA2 | | 1 unit | 0.025 |
| Terminal covers for cable lugs and busbar connections | | | | | | | |
| For complying with the phase clearances and as touch protection if box terminal is removed (2 units required per contactor) | | | | | | | |
|  | 3RW30 4. | S3 | | 3RT19 46-4EA1 | | 1 unit | 0.040 |
| Link modules to motor starter protectors | | | | | | | |
|  | 3RW30 13, 3RW30 14, 3RW30 16, 3RW30 17, 3RW30 18 | S00 | S0 | 3RA19 21-1A | | 10 units | 0.028 |
|  | 3RW30 26 | S0 | S0 | 3RA19 21-1A | | 10 units | 0.028 |
| | 3RW30 36 | S2 | S2 | 3RA19 31-1A | | 5 units | 0.033 |
| | 3RW30 46, 3RW30 47 | S3 | S3 | 3RA19 41-1A | | 5 units | 0.072 |
| Operating instructions¹⁾ | | | | | | | |
| For soft starters | | | | | | | |
| | 3RW30 1. | S00 | | 3ZX10 12-0RW30-2DA1 | | | |
| | 3RW30 2. | S0 | | | | | |
| | 3RW30 3. | S2 | | | | | |
| | 3RW30 4. | S3 | | | | | |

¹⁾ The operating instructions are included in the scope of supply.

| Version | Functionality Functions | Order No. | List Price \$ per PU | Weight per PU approx. kg |
|---|--|-----------------|----------------------|--------------------------|
| Covers and push-in lugs (only for 3RW30 03) | | | | |
|  | Sealable covers For securing against unauthorized adjustment of setting knobs | 3RP1 902 | | 5 units 0.004 |
|  | Push-in lugs For screw fixing | 3RP1 903 | | 10 units 0.002 |

3RW Soft Starters

3RW30 for standard applications

More information

Application examples for normal starting (Class 10)

Normal starting Class 10 (up to 20 s with 300 % $I_{n, motor}$).
The soft starter rating can be selected to be as high as the rating of the motor used.

| Application | Conveyor belt | Roller conveyor | Compressor | Small fan | Pump | Hydraulic pump |
|-------------------------------------|---------------|-----------------|------------|-----------|------|----------------|
| Starting parameters | | | | | | |
| • Voltage ramp and current limiting | | | | | | |
| - Starting voltage | % 70 | 60 | 50 | 40 | 40 | 40 |
| - Starting time | s 10 | 10 | 20 | 20 | 10 | 10 |

Note:

These tables present sample set values and device sizes. They are intended only for the purposes of information and are not binding. The set values depend on the application in question and must be optimized during start-up. Actual start times are load dependent.

The soft starter dimensions should be checked where necessary with the Win-Soft Starter software or with the help of Technical Assistance.

Configuration

The 3RW solid-state motor controllers are designed for easy starting conditions. In the event of deviating conditions or increased switching frequency, it may be necessary to choose a larger device. For accurate dimensioning, use the Win-Soft Starter selection and simulation program.

If necessary, an overload relay for heavy starting must be selected where long starting times are involved. PTC sensors are recommended.


In the motor feeder between the SIRIUS 3RW soft starter and the motor, no capacitive elements are permitted (e. g. no reactive-power compensation equipment). In addition, neither static systems for reactive-power compensation nor dynamic PFC (Power Factor Correction) must be operated in parallel during starting and ramp-down of the soft starter. This is important to prevent faults arising on the compensation equipment and/or the soft starter.

All elements of the main circuit (such as fuses, controls and overload relays) should be dimensioned for direct starting, following the local short-circuit conditions. Fuses, controls and overload relays must be ordered separately. Please observe the maximum switching frequencies specified in the technical specifications.

Note:


When induction motors are switched on, voltage drops normally appear on starters of all types (direct starters, wye-delta starters, soft starters). The infeed transformer must always be dimensioned such that the voltage dip when starting the motor remains within the permissible tolerance. If the infeed transformer is dimensioned with only a small margin, it is best for the control voltage to be supplied from a separate circuit (independently of the main voltage) in order to avoid the potential switching off of the soft starter.

Power electronics schematic circuit diagram

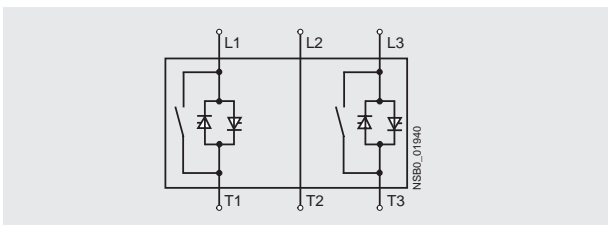

A bypass contact system is already integrated in the 3RW30 soft starter and therefore does not have to be ordered separately.

Status graphs

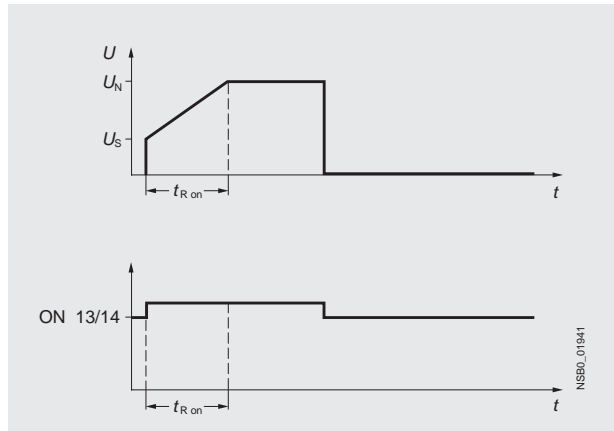

Win-Soft Starter selection and simulation program

With this software, you can simulate and select all Siemens soft starters, taking into account various parameters such as mains properties, motor and load data, and special application requirements.

The software is a valuable tool, which makes complicated, lengthy manual calculations for determining the required soft starters superfluous.

The Win-Soft Starter selection and simulation program can be downloaded from:

<http://www.siemens.de/sanftstarter> > Software

More information can be found on the Internet at:

<http://www.sea.siemens.com/softstarters>

3RW Soft Starters

3RW40 for standard applications

Overview

SIRIUS 3RW40 soft starters have all the same advantages as the 3RW30 soft starters.

The SIRIUS 3RW40 soft starters are characterized above all by their small space requirements. Integrated bypass contacts mean that minimal power is used at the power semiconductors (thyristors) after the motor has started up. This cuts down on heat losses, enabling a more compact design and making external bypass circuits superfluous.

At the same time this soft starter comes with additional integrated functions such as adjustable current limiting, motor overload and intrinsic device protection, and optional thermistor motor protection on some models.

Internal intrinsic device protection prevents the thermal overloading of the thyristors and the power section defects this can cause. As an option the thyristors can also be protected by semiconductor fuses from short-circuiting.

Thanks to integrated status monitoring and fault monitoring, this compact soft starter offers many different diagnostics options. Up to four LEDs and relay outputs permit differentiated monitoring and diagnostics of the operating mechanism by indicating the operating state as well as for example mains or phase failure, missing load, non-permissible tripping time/class setting, thermal overloading or device faults.

Soft starters rated up to 300 Hp (at 460 V) for standard applications in three-phase systems are available. Extremely small sizes, low power losses and simple start-up are just three of the many advantages of the SIRIUS 3RW40 soft starters.

"Increased safety" type of protection EEx e according to ATEX directive 94/9/EC

The 3RW40 soft starter sizes S0 to S12 are suitable for the starting of explosion-proof motors with "increased safety" type of protection EEx e.

See "Appendix" → "Standards and approvals" → "Type overview of approved devices for potentially explosive areas (ATEX explosion protection)".

Application

The SIRIUS 3RW40 solid-state soft starters are suitable for soft starting and stopping of three-phase asynchronous motors.

Due to two-phase control, the current is kept at minimum values in all three phases throughout the entire starting time and disturbing direct current components are eliminated in addition. This not only enables the two-phase starting of motors up to 300 Hp (at 460 V) but also avoids the current and torque peaks which occur e. g. with wye-delta starters.

Application areas

- Pumps
- Heat pumps
- Hydraulic pumps
- Presses
- Conveyors
- Roller conveyor
- Screw conveyors
- Escalators
- Small fans
- Centrifugal blowers
- Bow thrusters
- Stirrers
- Extruders
- Lathes
- Milling machines

3RW Soft Starters

3RW40 for standard applications

Selection and ordering data



3RW40 28-1BB14



3RW40 38-1BB14



3RW40 47-1BB14

| Ambient temperature 50 °C | | Rated power of induction motors for rated operational voltage U_e | | | | Size | Order No. | List Price \$ per PU | PS* | Weight per PU approx. |
|---|-------|---|-------|-------|----|----------------|-----------|----------------------|-------|-----------------------|
| Rated operational current $I_e^{(1)}$ | | | | | | | | | | |
| | 200 V | 230 V | 460 V | 575 V | | | | | | |
| A | hp | hp | hp | hp | | | | | kg | |
| Rated operational voltage U_e 200 ... 480 V | | | | | | | | | | |
| • With screw terminals | | | | | | | | | | |
| 11 | 3 | 3 | 7.5 | -- | S0 | 3RW40 24-1BB□4 | | 1 unit | 0.770 | |
| 23 | 5 | 5 | 15 | -- | S0 | 3RW40 26-1BB□4 | | 1 unit | 0.770 | |
| 29 | 7.5 | 7.5 | 20 | -- | S0 | 3RW40 27-1BB□4 | | 1 unit | 0.770 | |
| 34 | 10 | 10 | 25 | -- | S0 | 3RW40 28-1BB□4 | | 1 unit | 0.770 | |
| • With spring-type terminals | | | | | | | | | | |
| 11 | 3 | 3 | 7.5 | -- | S0 | 3RW40 24-2BB□4 | | 1 unit | 0.770 | |
| 23 | 5 | 5 | 15 | -- | S0 | 3RW40 26-2BB□4 | | 1 unit | 0.770 | |
| 29 | 7.5 | 7.5 | 20 | -- | S0 | 3RW40 27-2BB□4 | | 1 unit | 0.770 | |
| 34 | 10 | 10 | 25 | -- | S0 | 3RW40 28-2BB□4 | | 1 unit | 0.770 | |
| • With screw or spring-type terminals | | | | | | | | | | |
| 42 | 10 | 15 | 30 | -- | S2 | 3RW40 36-□BB□4 | | 1 unit | 1.350 | |
| 58 | 15 | 20 | 40 | -- | S2 | 3RW40 37-□BB□4 | | 1 unit | 1.350 | |
| 62 | 20 | 20 | 40 | -- | S2 | 3RW40 38-□BB□4 | | 1 unit | 1.350 | |
| • With screw or spring-type terminals | | | | | | | | | | |
| 73 | 20 | 25 | 50 | -- | S3 | 3RW40 46-□BB□4 | | 1 unit | 1.900 | |
| 98 | 30 | 30 | 75 | -- | S3 | 3RW40 47-□BB□4 | | 1 unit | 1.900 | |
| Rated operational voltage U_e 400 ... 600 V | | | | | | | | | | |
| • With screw terminals | | | | | | | | | | |
| 11 | -- | -- | 7.5 | 10 | S0 | 3RW40 24-1BB□5 | | 1 unit | 0.770 | |
| 23 | -- | -- | 15 | 20 | S0 | 3RW40 26-1BB□5 | | 1 unit | 0.770 | |
| 29 | -- | -- | 20 | 25 | S0 | 3RW40 27-1BB□5 | | 1 unit | 0.770 | |
| 34 | -- | -- | 25 | 30 | S0 | 3RW40 28-1BB□5 | | 1 unit | 0.770 | |
| • With spring-type terminals | | | | | | | | | | |
| 11 | -- | -- | 7.5 | 10 | S0 | 3RW40 24-2BB□5 | | 1 unit | 0.770 | |
| 23 | -- | -- | 15 | 20 | S0 | 3RW40 26-2BB□5 | | 1 unit | 0.770 | |
| 29 | -- | -- | 20 | 25 | S0 | 3RW40 27-2BB□5 | | 1 unit | 0.770 | |
| 34 | -- | -- | 25 | 30 | S0 | 3RW40 28-2BB□5 | | 1 unit | 0.770 | |
| • With screw or spring-type terminals | | | | | | | | | | |
| 42 | -- | -- | 30 | 40 | S2 | 3RW40 36-□BB□5 | | 1 unit | 1.350 | |
| 58 | -- | -- | 40 | 50 | S2 | 3RW40 37-□BB□5 | | 1 unit | 1.350 | |
| 62 | -- | -- | 40 | 60 | S2 | 3RW40 38-□BB□5 | | 1 unit | 1.350 | |
| • With screw or spring-type terminals | | | | | | | | | | |
| 73 | -- | -- | 50 | 60 | S3 | 3RW40 46-□BB□5 | | 1 unit | 1.900 | |
| 98 | -- | -- | 75 | 75 | S3 | 3RW40 47-□BB□5 | | 1 unit | 1.900 | |

Order No. supplement for connection types

- With screw terminals
- With spring-type terminals²⁾

Order No. supplement for rated control supply voltage U_s

- 24 V AC/DC
- 110 ... 230 V AC/DC

¹⁾ Stand-alone installation without auxiliary fan.

²⁾ Main connection from size S2: screw terminals.

1
2

0
1

Note:

Selection of the soft starter depends on the rated motor current. The SIRIUS 3RW40 solid-state soft starters are designed for easy starting conditions. $J_{Load} < 10 \times J_{Motor}$. In the event of deviating conditions or increased switching frequency, it may be necessary to choose a larger device. Siemens recommends the use of the selection and simulation program Win-Soft Starter. For information about rated currents for ambient temperatures other than 50°C, see technical information on page 7/56

3RW Soft Starters

3RW40 for standard applications



3RW40 28-1TB04



3RW40 38-1TB04



3RW40 47-1TB04

| Ambient temperature 50 °C | | | | | Size | Order No. | List Price \$ per PU | PS* | Weight per PU approx. |
|---|---|-------|-------|-------|------|----------------|----------------------|--------|-----------------------|
| Rated operational current I_e ¹⁾ | Rated power of induction motors for rated operational voltage U_e | | | | A | | | | kg |
| | 200 V | 230 V | 460 V | 575 V | | | | | |
| | hp | hp | hp | hp | | | | | |
| Rated operational voltage U_e 200 ... 480 V, with thermistor motor protection, rated control supply voltage U_s 24 V AC/DC | | | | | | | | | |
| • With screw terminals | | | | | | | | | |
| 11 | 3 | 3 | 7.5 | -- | S0 | 3RW40 24-1TB04 | | 1 unit | 0.770 |
| 23 | 5 | 5 | 15 | -- | S0 | 3RW40 26-1TB04 | | 1 unit | 0.770 |
| 29 | 7.5 | 7.5 | 20 | -- | S0 | 3RW40 27-1TB04 | | 1 unit | 0.770 |
| 34 | 10 | 10 | 25 | -- | S0 | 3RW40 28-1TB04 | | 1 unit | 0.770 |
| • With spring-type terminals | | | | | | | | | |
| 11 | 3 | 3 | 7.5 | -- | S0 | 3RW40 24-2TB04 | | 1 unit | 0.770 |
| 23 | 5 | 5 | 15 | -- | S0 | 3RW40 26-2TB04 | | 1 unit | 0.770 |
| 29 | 7.5 | 7.5 | 20 | -- | S0 | 3RW40 27-2TB04 | | 1 unit | 0.770 |
| 34 | 10 | 10 | 25 | -- | S0 | 3RW40 28-2TB04 | | 1 unit | 0.770 |
| • With screw or spring-type terminals | | | | | | | | | |
| 42 | 10 | 15 | 30 | -- | S2 | 3RW40 36-□TB04 | | 1 unit | 1.350 |
| 58 | 15 | 20 | 40 | -- | S2 | 3RW40 37-□TB04 | | 1 unit | 1.350 |
| 62 | 20 | 20 | 40 | -- | S2 | 3RW40 38-□TB04 | | 1 unit | 1.350 |
| • With screw or spring-type terminals | | | | | | | | | |
| 73 | 20 | 25 | 50 | -- | S3 | 3RW40 46-□TB04 | | 1 unit | 1.900 |
| 98 | 30 | 30 | 75 | -- | S3 | 3RW40 47-□TB04 | | 1 unit | 1.900 |
| Rated operational voltage U_e 400 ... 600 V, with thermistor motor protection, rated control supply voltage U_s 24 V AC/DC | | | | | | | | | |
| • With screw terminals | | | | | | | | | |
| 11 | -- | -- | 7.5 | 10 | S0 | 3RW40 24-1TB05 | | 1 unit | 0.770 |
| 23 | -- | -- | 15 | 20 | S0 | 3RW40 26-1TB05 | | 1 unit | 0.770 |
| 29 | -- | -- | 20 | 25 | S0 | 3RW40 27-1TB05 | | 1 unit | 0.770 |
| 34 | -- | -- | 25 | 30 | S0 | 3RW40 28-1TB05 | | 1 unit | 0.770 |
| • With spring-type terminals | | | | | | | | | |
| 11 | -- | -- | 7.5 | 10 | S0 | 3RW40 24-2TB05 | | 1 unit | 0.770 |
| 23 | -- | -- | 15 | 20 | S0 | 3RW40 26-2TB05 | | 1 unit | 0.770 |
| 29 | -- | -- | 20 | 25 | S0 | 3RW40 27-2TB05 | | 1 unit | 0.770 |
| 34 | -- | -- | 25 | 30 | S0 | 3RW40 28-2TB05 | | 1 unit | 0.770 |
| • With screw or spring-type terminals | | | | | | | | | |
| 42 | -- | -- | 30 | 40 | S2 | 3RW40 36-□TB05 | | 1 unit | 1.350 |
| 58 | -- | -- | 40 | 50 | S2 | 3RW40 37-□TB05 | | 1 unit | 1.350 |
| 62 | -- | -- | 40 | 60 | S2 | 3RW40 38-□TB05 | | 1 unit | 1.350 |
| • With screw or spring-type terminals | | | | | | | | | |
| 73 | -- | -- | 50 | 60 | S3 | 3RW40 46-□TB05 | | 1 unit | 1.900 |
| 98 | -- | -- | 75 | 75 | S3 | 3RW40 47-□TB05 | | 1 unit | 1.900 |

Order No. supplement for connection types

- With screw terminals
- With spring-type terminals²⁾

1) Stand-alone installation without auxiliary fan.

2) Main connection from size S2: screw terminals.

1
2

Note:

Selection of the soft starter depends on the rated motor current. The SIRIUS 3RW40 solid-state soft starters are designed for easy starting conditions. $J_{Load} < 10 \times J_{Motor}$. In the event of deviating conditions or increased switching frequency, it may be necessary to choose a larger device. Siemens recommends the use of the selection and simulation program Win-Soft Starter. For information about rated currents for ambient temperatures > 40° C, see technical information on page 7/56

3RW Soft Starters

3RW40 for standard applications



3RW40 56-6BB44



3RW40 76-6BB44

| Ambient temperature 50 °C | | Rated power of induction motors for rated operational voltage U_e | | | | Size | Order No. | List Price \$ per PU | PS* | Weight per PU approx. |
|---|-------|---|-------|------------|------------|----------------|-----------|----------------------|-------|-----------------------|
| Rated operational current I_e ¹⁾ | 200 V | 230 V | 460 V | 575 V | | | | | | |
| | hp | hp | hp | hp | | | | | kg | |
| Rated operational voltage U_e 200 ... 460 V | | | | | | | | | | |
| • With screw or spring-type terminals | | | | | | | | | | |
| 117 | 30 | 40 | 75 | -- | S6 | 3RW40 55-□BB□4 | | 1 unit | 4.900 | |
| 145 | 40 | 50 | 100 | -- | | 3RW40 56-□BB□4 | | 1 unit | 6.900 | |
| • With screw or spring-type terminals | | | | | | | | | | |
| 205 | 60 | 75 | 150 | -- | S12 | 3RW40 73-□BB□4 | | 1 unit | 8.900 | |
| 248 | 75 | 100 | 200 | -- | | 3RW40 74-□BB□4 | | 1 unit | 8.900 | |
| 315 | 100 | 125 | 250 | -- | | 3RW40 75-□BB□4 | | 1 unit | 8.900 | |
| 385 | 125 | 150 | 300 | -- | | 3RW40 76-□BB□4 | | 1 unit | 8.900 | |
| Rated operational voltage U_e 400 ... 600 V | | | | | | | | | | |
| • With screw or spring-type terminals | | | | | | | | | | |
| 117 | -- | -- | 75 | 100 | S6 | 3RW40 55-□BB□5 | | 1 unit | 4.900 | |
| 145 | -- | -- | 100 | 150 | | 3RW40 56-□BB□5 | | 1 unit | 6.900 | |
| • With screw or spring-type terminals | | | | | | | | | | |
| 205 | -- | -- | 150 | 200 | S12 | 3RW40 73-□BB□5 | | 1 unit | 8.900 | |
| 248 | -- | -- | 200 | 250 | | 3RW40 74-□BB□5 | | 1 unit | 8.900 | |
| 315 | -- | -- | 250 | 300 | | 3RW40 75-□BB□5 | | 1 unit | 8.900 | |
| 385 | -- | -- | 300 | 400 | | 3RW40 76-□BB□5 | | 1 unit | 8.900 | |

Order No. supplement for connection types²⁾

- With screw terminals
- With spring-type terminals

Order No. supplement for the rated control supply voltage U_s ³⁾

- 115 V AC
- 230 V AC

1) Stand-alone installation.

2) Power connection: busbar connection.

3) Control by way of the internal 24 V DC supply and direct control by means of PLC possible.

Note:

Selection of the soft starter depends on the rated motor current.

The SIRIUS 3RW40 solid-state soft starters are designed for easy starting conditions. $J_{Load} < 10 \times J_{Motor}$. In the event of deviating conditions or increased switching frequency, it may be necessary to choose a larger device. Siemens recommends the use of the selection and simulation program Win-Soft Starter. For information about rated currents for ambient temperatures > 40 °C, see technical information on page 7/56







6
2

3
4

3RW Soft Starters

3RW40 for standard applications



Accessories

| For soft starters Type | Version Size | | Order No. | List Price \$ per PU | PS* | Weight per PU approx. kg |
|--|-------------------|---|-----------------------|----------------------------|--------|-----------------------------------|
| Box terminal blocks for soft starters | | | | | | |
| For round and flat wires | | | | | | |
|  3RW40 5. | S6 | <ul style="list-style-type: none"> • Up to 70 mm² • Up to 120 mm² | 3RT19 55-4G | | 1 unit | 0.230 |
| 3RW40 7. | S12 | <ul style="list-style-type: none"> • Up to 240 mm² | 3RT19 56-4G | | 1 unit | 0.260 |
| | | | 3RT19 66-4G | | 1 unit | 0.676 |
| Auxiliary terminals | | | | | | |
| Auxiliary terminals, 3-pole | | | | | | |
| 3RW40 4. | S3 | | 3RT19 46-4F | | 1 unit | 0.035 |
| Covers for soft starters | | | | | | |
| Terminal covers for box terminals | | | | | | |
| Additional touch protection to be fitted at the box terminals (2 units required per device) | | | | | | |
|  3RW40 3. | S2 | | 3RT19 36-4EA2 | | 1 unit | 0.020 |
| 3RW40 4. | S3 | | 3RT19 46-4EA2 | | 1 unit | 0.025 |
| 3RW40 5. | S6 | | 3RT19 56-4EA2 | | 1 unit | 0.030 |
| 3RW40 7. | S12 | | 3RT19 66-4EA2 | | 1 unit | 0.040 |
| Terminal covers for cable lugs and busbar connections | | | | | | |
|  3RW40 4. | S3 | For complying with the phase clearances and as touch protection if box terminal is removed (2 units required per contactor) | 3RT19 46-4EA1 | | 1 unit | 0.040 |
| 3RW40 5. | S6 | | 3RT19 56-4EA1 | | 1 unit | 0.070 |
| 3RW40 7. | S12 | | 3RT19 66-4EA1 | | 1 unit | 0.130 |
| Sealing covers | | | | | | |
|  3RW40 2. to 3RW40 4. | S0, S2, S3 | | 3RW49 00-0PB10 | | 1 unit | 0.005 |
| 3RW40 5. and 3RW40 7. | S6, S12 | | 3RW49 00-0PB00 | | 1 unit | 0.010 |
| Modules for RESET¹⁾ | | | | | | |
| Modules for remote RESET, electrical | | | | | | |
| Operating range 0.85 ... 1.1 x U _s , power consumption 80 VA AC, 70 W DC, ON period 0.2 s ... 4 s, switching frequency 60/h | | | | | | |
|  3RW40 5. and 3RW40 7. | S6, S12 | <ul style="list-style-type: none"> • 24 ... 30 V AC/DC • 110 ... 127 V AC/DC • 220 ... 250 V AC/DC | 3RU19 00-2AB71 | | 1 unit | 0.066 |
| | | | 3RU19 00-2AF71 | | 1 unit | 0.067 |
| | | | 3RU19 00-2AM71 | | 1 unit | 0.066 |
| Cable releases with holder for RESET | | | | | | |
| For Ø 6.5 mm holes in the control panel; max. control panel thickness 8 mm | | | | | | |
|  3RW40 5. and 3RW40 7. | S6, S12 | <ul style="list-style-type: none"> • Length 400 mm • Length 600 mm | 3RU19 00-1B | | 1 unit | 0.063 |
| | | | 3RU19 00-1C | | 1 unit | 0.073 |

¹⁾ Remote RESET already integrated in the 3RW40 2. to 3RW40 4. soft starters.

3RW Soft Starters

3RW40 for standard applications


| For soft starters | | Motor starter protectors | | Order No. | List Price \$ per PU | PS* | Weight per PU approx. kg |
|---|-----------------------|--------------------------|-----------|----------------------------|----------------------|----------|--------------------------|
| Type | Size | Size | Size | | | | |
| Link modules to motor starter protectors | | | | | | | |
|  | 3RW40 24, 3RW40 26 | S0 | S0 | 3RA19 21-1A | | 10 units | 0.028 |
| | 3RW40 36 | S2 | S2 | 3RA19 31-1A | | 5 units | 0.033 |
| | 3RW40 46, 3RW40 47 | S3 | S3 | 3RA19 41-1A | | 5 units | 0.072 |
| | | | | | | | |
| Fans (to increase switching frequency and for device mounting in positions different from the normal position) | | | | | | | |
|  | 3RW40 2. | S0 | | 3RW49 28-8VB00 | | 1 unit | 0.010 |
| | 3RW40 3., 3RW40 4. | S2, S3 | | 3RW49 47-8VB00 | | 1 unit | 0.020 |
| | | | | | | | |
| Operating instructions¹⁾ | | | | | | | |
| For soft starters | | | | | | | |
| 3RW40 2. | S0 | | | 3ZX10 12-0RW40-1AA1 | | | |
| 3RW40 3. | S2 | | | | | | |
| 3RW40 4. | S3 | | | | | | |
| 3RW40 5. | S6 | | | 3ZX10 12-0RW40-2DA1 | | | |
| 3RW40 7. | S12 | | | | | | |

¹⁾ The operating instructions are included in the scope of supply.

They are also available on the Internet at:

www.usa.siemens.com/softstarters

Spare parts

| For soft starters | | Version | | Order No. | List Price \$ per PU | PS* | Weight per PU approx. kg |
|---|-----------------|------------|------------------------------------|-----------------------|----------------------|--------|--------------------------|
| Type | Size | Size | Rated control supply voltage U_s | | | | |
| Fans | | | | | | | |
|  | 3RW40 5.-. BB3. | S6 | 115 V AC | 3RW49 36-8VX30 | | 1 unit | 0.300 |
| | 3RW40 5.-. BB4. | S6 | 230 V AC | 3RW49 36-8VX40 | | 1 unit | 0.300 |
| | 3RW40 7.-. BB3. | S12 | 115 V AC | 3RW49 47-8VX30 | | 1 unit | 0.500 |
| | 3RW40 7.-. BB4. | S12 | 230 V AC | 3RW49 47-8VX40 | | 1 unit | 0.500 |

3RW Soft Starters

3RW40 for standard applications

More information

Application examples for normal starting (Class 10)

Normal starting Class 10 (up to 20 s with 350 % $I_{n\ motor}$).

The soft starter rating can be selected to be as high as the rating of the motor used.

| Application | Conveyor belt | Roller conveyor | Small fan | Pump | Hydraulic pump |
|-------------------------------------|---------------|-----------------|----------------|----------------|----------------|
| Starting parameters | | | | | |
| • Voltage ramp and current limiting | | | | | |
| - Starting voltage | % | 70 | 60 | 40 | 40 |
| - Starting time | s | 10 | 10 | 10 | 10 |
| - Current limit value | | $5 \times I_M$ | $5 \times I_M$ | $4 \times I_M$ | $4 \times I_M$ |
| Ramp-down time | s | 5 | 5 | 0 | 10 |

Application examples for heavy starting (Class 20)

Heavy starting Class 20 (up to 40 s with 350 % $I_{n\ motor}$).

The soft starter has to be selected at least one rating class higher than the motor used.

| Application | Stirrer | Centrifuge |
|-------------------------------------|---------|----------------|
| Starting parameters | | |
| • Voltage ramp and current limiting | | |
| - Starting voltage | % | 40 |
| - Starting time | s | 20 |
| - Current limit value | | $4 \times I_M$ |
| Ramp-down time | s | 0 |

Note:

These tables present sample set values and device sizes. They are intended only for the purposes of information and are not binding. The set values depend on the application in question and must be optimized during start-up. Actual start times are load dependent.

The soft starter dimensions should be checked where necessary with the Win-Soft Starter software or with the help of Technical Assistance.

3RW Soft Starters

3RW40 for standard applications

Configuration

The 3RW solid-state soft starters are designed for easy starting conditions. In the event of severe conditions or increased switching frequency, it may be necessary to choose a larger device. For accurate dimensioning, use the Win-Soft Starter selection and simulation program.

Where long starting times are involved, the integrated solid-state overload relay for heavy starting should not be disconnected. PTC sensors are recommended. This also applies for the smooth ramp-down because during the ramp-down time an additional current loading applies in contrast to free ramp-down.

In the case of high switching frequencies in S4 mode, Siemens recommends the use of PTC sensors. For corresponding device versions with integrated thermistor motor protection or separate thermistor evaluation devices see Industrial Controls catalog Chapter 11 "Function Relays, Interfaces and Converters".


In the motor feeder between the SIRIUS 3RW soft starter and the motor, no capacitive elements are permitted (e. g. no reactive-power compensation equipment, PFC capacitors). In addition, neither static systems for reactive-power compensation nor dynamic PFC (Power Factor Correction) must be operated in parallel during starting and ramp-down of the soft starter. This is important to prevent faults arising on the compensation equipment and/or the soft starter.

All elements of the main circuit (such as fuses and controls) should be dimensioned for direct starting, following the local short-circuit conditions. Fuses, controls and overload relays must be ordered separately. Please observe the maximum switching frequencies specified in the technical specifications.

Note:

When induction motors are switched on, voltage drops normally appear on starters of all types (direct starters, wye-delta starters, soft starters). The infeed transformer must always be dimensioned such that the voltage dip when starting the motor remains within the permissible tolerance. If the infeed transformer is dimensioned with only a small margin, it is best for the control voltage to be supplied from a separate circuit (independently of the main voltage) in order to avoid the potential switching off of the soft starter.


Power electronics schematic circuit diagram

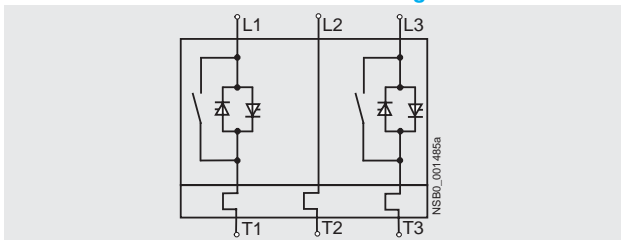

A bypass contact system and solid-state overload relay are already integrated in the 3RW40 soft starter and therefore do not have to be ordered separately.

- 1) U_n = Full Voltage
- 2) U_s = Starting (Initial) Voltage
- 3) t_{R} = Time Running
- 4) I_e = Rated operational current

Status graphs¹⁾

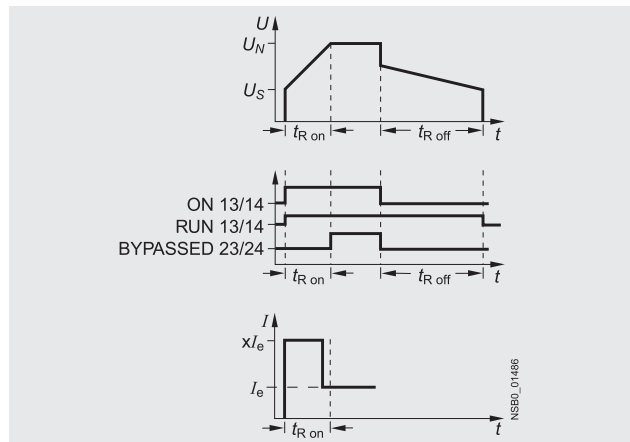

Win-Soft Starter selection and simulation program

With this software, you can simulate and select all Siemens soft starters, taking into account various parameters such as mains properties, motor and load data, and special application requirements.

The software is a valuable tool, which makes complicated, lengthy manual calculations for determining the required soft starters superfluous.

The Win-Soft Starter selection and simulation program can be downloaded from:

www.usa.siemens.com/softstarters > Software

More information can be found on the Internet at:

www.usa.siemens.com/softstarters

3RW Soft Starters

3RW44 for high-feature applications

Overview

In addition to soft starting and soft ramp-down, the solid-state SIRIUS 3RW44 soft starters provide numerous functions for higher-level requirements. They cover a performance range up to 900 Hp (at 460 V) in the inline circuit and up to 1600Hp (at 460 V) in the inside-delta circuit.

The SIRIUS 3RW44 soft starters are characterized by a compact design for space-saving and clearly arranged control cabinet layouts. For optimized motor starting and stopping the innovative SIRIUS 3RW44 soft starters are an attractive alternative with considerable savings potential compared to applications with a frequency converter. The new torque control and adjustable current limiting enable the High-Feature soft starters to be used in nearly every conceivable task. They guarantee the reliable avoidance of sudden torque applications and current peaks during motor starting and stopping. This creates savings potential when calculating the size of the switchgear and when servicing the machinery installed. Whether it's for inline circuits or inside-delta circuits – the SIRIUS 3RW44 soft starter offers savings especially in terms of size and equipment costs.

The bypass contacts already integrated in the soft starter bypass the thyristors after a motor ramp-up is detected. This results in a further reduction in the heat loss occurring during operation of the soft starter.

Combinations of various starting, operating and ramp-down possibilities ensure an optimum adaptation to the application-specific requirements. Operation and commissioning can be performed with the menu-controlled keypad and a menu-prompted, multi-line graphical display with background lighting. The optimized motor ramp-up and ramp-down can be effected quickly, easily and reliably by means of just a few settings with a previously selected language. Four-key operation and plain-text displays for each menu point guarantee full clarity at every moment of the parameterization and operation.

Applicable standards

- IEC 60947-4-2
- UL/CSA

Soft Starter ES parameterization software

Soft Starter ES software is used for the parameterization, monitoring and service diagnostics of SIRIUS 3RW44 High Feature soft starters.

Application

The SIRIUS 3RW44 solid-state soft starters are suitable for the torque-controlled soft starting and smooth ramp-down as well as braking of three-phase asynchronous motors.


Application areas, e. g.

- Pumps
- Fans
- Compressors
- Water transport
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills
- Saws
- Crushers
- Mixers
- Centrifuges
- Industrial cooling and refrigerating systems

3RW Soft Starters

3RW44 for high-feature applications

Selection and ordering data

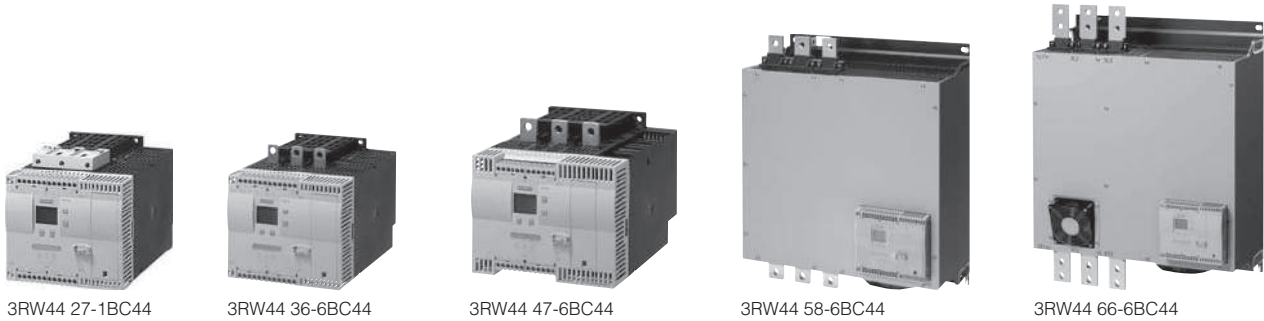

| Ambient temperature 50 °C | | | | | Order No. | List Price \$ per PU | PS* | Weight per PU approx. kg |
|--|---|-------------|-------------|-------------|----------------|----------------------|--------|--------------------------|
| Rated operational current I_e | Rated power of induction motors for rated operational voltage U_e | | | | | | | |
| A | 200 V hp | 230 V hp | 460 V hp | 575 V hp | | | | |
| Inline circuits²⁾, rated operational voltage 200 ... 460 V | | | | | | | | |
| 26 | 7.5 | 7.5 | 15 | -- | 3RW44 22-□BC□4 | | 1 unit | 6.500 |
| 32 | 10 | 10 | 20 | -- | 3RW44 23-□BC□4 | | 1 unit | 6.500 |
| 42 | 10 | 15 | 25 | -- | 3RW44 24-□BC□4 | | 1 unit | 6.500 |
| 51 | 15 | 15 | 30 | -- | 3RW44 25-□BC□4 | | 1 unit | 6.500 |
| 68 | 20 | 20 | 50 | -- | 3RW44 26-□BC□4 | | 1 unit | 6.500 |
| 82 | 25 | 25 | 60 | -- | 3RW44 27-□BC□4 | | 1 unit | 6.500 |
| Order No. supplement for connection types | | | | | | | | |
| <ul style="list-style-type: none"> • With spring-type terminals • With screw terminals | | | | | 3 1 | | | |
| 100 | 30 | 30 | 75 | -- | 3RW44 34-□BC□4 | | 1 unit | 7.900 |
| 117 | 30 | 40 | 75 | -- | 3RW44 35-□BC□4 | | 1 unit | 7.900 |
| 145 | 40 | 50 | 100 | -- | 3RW44 36-□BC□4 | | 1 unit | 7.900 |
| 180 | 50 | 60 | 125 | -- | 3RW44 43-□BC□4 | | 1 unit | 11.500 |
| 215 | 60 | 75 | 150 | -- | 3RW44 44-□BC□4 | | 1 unit | 11.500 |
| 280 | 75 | 100 | 200 | -- | 3RW44 45-□BC□4 | | 1 unit | 11.500 |
| 315 | 100 | 125 | 250 | -- | 3RW44 46-□BC□4 | | 1 unit | 11.500 |
| 385 | 125 | 150 | 300 | -- | 3RW44 47-□BC□4 | | 1 unit | 11.500 |
| 494 | 150 | 200 | 400 | -- | 3RW44 53-□BC□4 | | 1 unit | 50.000 |
| 551 | 150 | 200 | 450 | -- | 3RW44 54-□BC□4 | | 1 unit | 50.000 |
| 615 | 200 | 250 | 500 | -- | 3RW44 55-□BC□4 | | 1 unit | 50.000 |
| 693 | 200 | 250 | 550 | -- | 3RW44 56-□BC□4 | | 1 unit | 50.000 |
| 780 | 250 | 300 | 600 | -- | 3RW44 57-□BC□4 | | 1 unit | 50.000 |
| 850 | 300 | 350 | 700 | -- | 3RW44 58-□BC□4 | | 1 unit | 50.000 |
| 970 | 350 | 400 | 800 | -- | 3RW44 65-□BC□4 | | 1 unit | 78.000 |
| 1076 | 350 | 400 | 900 | -- | 3RW44 66-□BC□4 | | 1 unit | 78.000 |
| Order No. supplement for connection types | | | | | | | | |
| <ul style="list-style-type: none"> • With spring-type terminals • With screw terminals | | | | | 2 6 | | | |
| Order No. supplement for the rated control supply voltage U_s¹⁾ | | | | | | | | |
| <ul style="list-style-type: none"> • 115 V AC • 230 V AC | | | | | | 3 4 | | |

- With spring-type terminals
- With screw terminals

Order No. supplement for the rated control supply voltage U_s ¹⁾

- 115 V AC
- 230 V AC

¹⁾ Control by way of the internal 24 V DC supply and direct control by means of PLC possible.

²⁾ For inside delta selection, see page 7/76.

Note:

Soft starter selection depends on the rated motor current.

The 3RW44 solid-state soft starters are designed for normal starting (Class 10). (Inertia load of the overall operating mechanism $J_{Load} < 10 \times J_{Motor}$; starting current 350 % $\times I_e$ for 20 s similar load). For any other conditions of use, the devices should be selected using the Win-Soft Starter selection and simulation program. See Technical specifications for information about rated currents for ambient temperatures > 40 °C and switching frequency.

3RW Soft Starters

3RW44 for high-feature applications

| Ambient temperature 50 °C | | | | | Order No. | List Price \$ per PU | PS* | Weight per PU approx. |
|--|---|-------|-------|-------------|----------------|----------------------|--------|-----------------------|
| Rated operational current I_e | Rated power of induction motors for rated operational voltage U_e | | | | | | | |
| | 200 V | 230 V | 460 V | 575 V | | | | |
| A | hp | hp | hp | hp | | | | kg |
| Inline circuits²⁾, rated operational voltage 400 ... 600 V | | | | | | | | |
| 26 | -- | -- | 15 | 20 | 3RW44 22-□BC□5 | | 1 unit | 6.500 |
| 32 | -- | -- | 20 | 25 | 3RW44 23-□BC□5 | | 1 unit | 6.500 |
| 42 | -- | -- | 25 | 30 | 3RW44 24-□BC□5 | | 1 unit | 6.500 |
| 51 | -- | -- | 30 | 40 | 3RW44 25-□BC□5 | | 1 unit | 6.500 |
| 68 | -- | -- | 50 | 50 | 3RW44 26-□BC□5 | | 1 unit | 6.500 |
| 82 | -- | -- | 60 | 75 | 3RW44 27-□BC□5 | | 1 unit | 6.500 |
| Order No. supplement for connection types | | | | | | | | |
| <ul style="list-style-type: none"> • With spring-type terminals • With screw terminals | | | | | 3 | 1 | | |
| 100 | -- | -- | 75 | 75 | 3RW44 34-□BC□5 | | 1 unit | 7.900 |
| 117 | -- | -- | 75 | 100 | 3RW44 35-□BC□5 | | 1 unit | 7.900 |
| 145 | -- | -- | 100 | 125 | 3RW44 36-□BC□5 | | 1 unit | 7.900 |
| 180 | -- | -- | 125 | 150 | 3RW44 43-□BC□5 | | 1 unit | 11.500 |
| 215 | -- | -- | 150 | 200 | 3RW44 44-□BC□5 | | 1 unit | 11.500 |
| 280 | -- | -- | 200 | 250 | 3RW44 45-□BC□5 | | 1 unit | 11.500 |
| 315 | -- | -- | 250 | 300 | 3RW44 46-□BC□5 | | 1 unit | 11.500 |
| 385 | -- | -- | 300 | 400 | 3RW44 47-□BC□5 | | 1 unit | 11.500 |
| 494 | -- | -- | 400 | 500 | 3RW44 53-□BC□5 | | 1 unit | 50.000 |
| 551 | -- | -- | 450 | 550 | 3RW44 54-□BC□5 | | 1 unit | 50.000 |
| 615 | -- | -- | 500 | 600 | 3RW44 55-□BC□5 | | 1 unit | 50.000 |
| 693 | -- | -- | 550 | 700 | 3RW44 56-□BC□5 | | 1 unit | 50.000 |
| 780 | -- | -- | 600 | 800 | 3RW44 57-□BC□5 | | 1 unit | 50.000 |
| 850 | -- | -- | 700 | 850 | 3RW44 58-□BC□5 | | 1 unit | 50.000 |
| 970 | -- | -- | 800 | 1000 | 3RW44 65-□BC□5 | | 1 unit | 78.000 |
| 1076 | -- | -- | 900 | 1100 | 3RW44 66-□BC□5 | | 1 unit | 78.000 |
| Order No. supplement for connection types | | | | | | | | |
| <ul style="list-style-type: none"> • With spring-type terminals • With screw terminals | | | | | 2 | 6 | | |
| Order No. supplement for the rated control supply voltage U_s¹⁾ | | | | | | | | |
| <ul style="list-style-type: none"> • 115 V AC • 230 V AC | | | | | | | 3 | 4 |

1) Control by way of the internal 24 V DC supply and direct control by means of PLC possible.

2) For inside delta selection, see page 7/76.

Note:

Soft starter selection depends on the rated motor current.

The 3RW44 solid-state soft starters are designed for normal starting (Class 10). (Inertia load of the overall operating mechanism $J_{Load} < 10 \times J_{Motor}$; starting current 350 % $\times I_e$ for 20 s similar load). For any other conditions of use, the devices should be selected using the Win-Soft Starter selection and simulation program. See Technical specifications for information about rated currents for ambient temperatures > 40 °C and switching frequency.

3RW Soft Starters

3RW44 for high-feature applications

| Ambient temperature 50 °C | | | | | Order No. | List Price \$ per PU | PS* | Weight per PU approx. |
|--|---|-------|-------|-------|----------------|----------------------|--------|-----------------------|
| Rated operational current I_e | Rated power of induction motors for rated operational voltage U_e | | | | | | | |
| | 200 V | 230 V | 460 V | 575 V | | | | |
| A | hp | hp | hp | hp | | | | kg |
| Inline circuits, rated operational voltage 400 ... 690 V | | | | | | | | |
| 26 | -- | -- | 15 | 20 | 3RW44 22-□BC□6 | | 1 unit | 6.500 |
| 32 | -- | -- | 20 | 25 | 3RW44 23-□BC□6 | | 1 unit | 6.500 |
| 42 | -- | -- | 25 | 30 | 3RW44 24-□BC□6 | | 1 unit | 6.500 |
| 51 | -- | -- | 30 | 40 | 3RW44 25-□BC□6 | | 1 unit | 6.500 |
| 68 | -- | -- | 50 | 50 | 3RW44 26-□BC□6 | | 1 unit | 6.500 |
| 82 | -- | -- | 60 | 75 | 3RW44 27-□BC□6 | | 1 unit | 6.500 |
| Order No. supplement for connection types | | | | | | | | |
| • With spring-type terminals | | | | | 3 | | | |
| • With screw terminals | | | | | 1 | | | |
| 100 | -- | -- | 75 | 75 | 3RW44 34-□BC□6 | | 1 unit | 7.900 |
| 117 | -- | -- | 75 | 100 | 3RW44 35-□BC□6 | | 1 unit | 7.900 |
| 145 | -- | -- | 100 | 125 | 3RW44 36-□BC□6 | | 1 unit | 7.900 |
| 180 | -- | -- | 125 | 150 | 3RW44 43-□BC□6 | | 1 unit | 11.500 |
| 215 | -- | -- | 150 | 200 | 3RW44 44-□BC□6 | | 1 unit | 11.500 |
| 280 | -- | -- | 200 | 250 | 3RW44 45-□BC□6 | | 1 unit | 11.500 |
| 315 | -- | -- | 250 | 300 | 3RW44 46-□BC□6 | | 1 unit | 11.500 |
| 385 | -- | -- | 300 | 400 | 3RW44 47-□BC□6 | | 1 unit | 11.500 |
| 494 | -- | -- | 400 | 500 | 3RW44 53-□BC□6 | | 1 unit | 50.000 |
| 551 | -- | -- | 450 | 550 | 3RW44 54-□BC□6 | | 1 unit | 50.000 |
| 615 | -- | -- | 500 | 600 | 3RW44 55-□BC□6 | | 1 unit | 50.000 |
| 693 | -- | -- | 550 | 700 | 3RW44 56-□BC□6 | | 1 unit | 50.000 |
| 780 | -- | -- | 600 | 800 | 3RW44 57-□BC□6 | | 1 unit | 50.000 |
| 850 | -- | -- | 700 | 850 | 3RW44 58-□BC□6 | | 1 unit | 50.000 |
| 970 | -- | -- | 800 | 1000 | 3RW44 65-□BC□6 | | 1 unit | 78.000 |
| 1076 | -- | -- | 900 | 1100 | 3RW44 66-□BC□6 | | 1 unit | 78.000 |
| Order No. supplement for connection types | | | | | | | | |
| • With spring-type terminals | | | | | 2 | | | |
| • With screw terminals | | | | | 6 | | | |
| Order No. supplement for the rated control supply voltage U_s 1) | | | | | | | | |
| • 115 V AC | | | | | | | | |
| • 230 V AC | | | | | | | | |

1) Control by way of the internal 24 V DC supply and direct control by means of PLC possible.

Note:
Soft starter selection depends on the rated motor current.

The 3RW44 solid-state soft starters are designed for normal starting (Class 10). (Inertia load of the overall operating mechanism $J_{Load} < 10 \times J_{Motor}$; starting current 350 % $\times I_e$ for 20 s similar load). For any other conditions of use, the devices should be selected using the Win-Soft Starter selection and simulation program. See Technical specifications for information about rated currents for ambient temperatures > 40 °C and switching frequency.

Introduction

Overview



SIRIUS ES engineering software (E-SW)

The programs of the SIRIUS ES software family enable:

- Clearly arranged configuring of device functions and their parameters – online and offline
- Efficient diagnostics functions and display of the most important measured values
- Time savings through shorter startup times.

The SIRIUS ES programs such as Motor Starter ES, Soft Starter ES and SIMOCODE ES are available in three versions which differ in user-friendliness, scope of functions and price (for details see the descriptions of the individual products).

| SIRIUS ES | Basic | Standard | Premium |
|--|-------|----------|---------|
| Local interface on the device (system interface) | ✓ | ✓ | ✓ |
| Basic functions for parameterizing the devices | | | |
| • Parameter assignment | ✓ | ✓ | ✓ |
| • Operating | ✓ | ✓ | ✓ |
| • Diagnostics | ✓ | ✓ | ✓ |
| • Test | ✓ | ✓ | ✓ |
| Standard functionality | | | |
| • Parameterizing with the integrated graphics editor ¹⁾ | -- | ✓ | ✓ |
| • Creating typicals | -- | ✓ | ✓ |
| • Exporting parameters | -- | ✓ | ✓ |
| Complete functionality | | | |
| • Group functions | -- | -- | ✓ |
| • S7 Routing | -- | -- | ✓ |
| • Teleservice through MPI | -- | -- | ✓ |
| • STEP7 Object Manager | -- | -- | ✓ |
| • PROFIBUS interface | -- | -- | ✓ |


¹⁾ Depending on SIRIUS ES program.

Application

In addition to device-specific parameterization, the programs of the SIRIUS ES software family also provide the following functionality in a uniform look and feel. These functions are available in many SIRIUS ES programs.

- Standards-conform printouts
The programs of the SIRIUS ES software family greatly simplify machine documentation. Parameterization printouts according to EN ISO 7200 are possible. The elements to be printed are easy to select and compile as required.
- Easy creation of parameter templates
Parameter templates can be created for devices and applications with only minimum differences in their parameters. These templates contain all the parameters which are needed for the parameterization. In addition it is possible to specify which of these parameters are fixed and which can be customized, e. g. by the startup engineer.
- Group function
For the user-friendly parameterization of numerous devices or applications of the same type, the programs of the SIRIUS ES software family offer a group function which enables the parameterization of several devices to be read out or written through PROFIBUS. In conjunction with templates it is even possible to selectively adapt the same parameters in any number of parameterizations.
- Teleservice through MPI
The premium versions of the SIRIUS ES software families support the use of MPI Teleservice (comprising the Teleservice software and various Teleservice adapters) for remote diagnostics of the devices. This facilitates diagnostics and maintenance and it shortens response times for service purposes.

Introduction

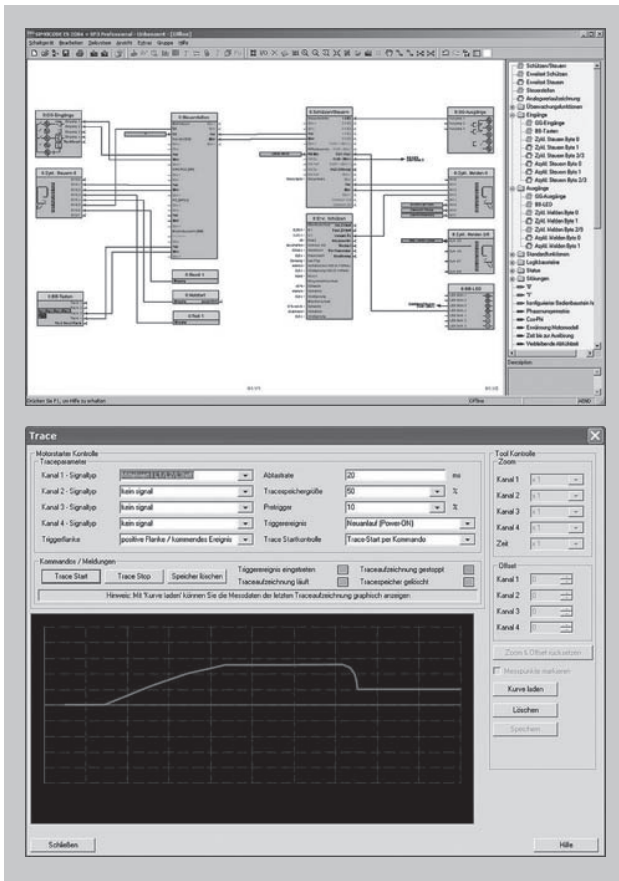

Efficient engineering and startup with graphic interfaces and diagnostics options

Types of delivery and license


The programs of the SIRIUS ES software family are available as follows:

- Floating license – the license for any one user at any one time
 - Authorizes any one user
 - Independent of the number of installations (unlike the single license which is allowed to be installed once only)
 - Only the actual use of the program has to be licensed
 - Trial license (free use of all program functions for 14 days for test and evaluation purposes, included on every product CD, available in the download file of the SIRIUS ES program in the Service&Support portal).


Following delivery versions are available in addition for the programs of the SIRIUS ES software family:

- Upgrade
 - Upgrade from an old to a new version with expanded functions, e. g. upgrade from Motor Starter ES 2006 to Motor Starter ES 2007
- Powerpack
 - Special pack for switching within the same software version to a more powerful version with more functionality, e. g. Powerpack Motor Starter ES 2007 for switching from Standard to Premium
- Software Update Service
 - To keep you up to date at all times we offer a special service which supplies you automatically with all service packs and upgrades

Overview

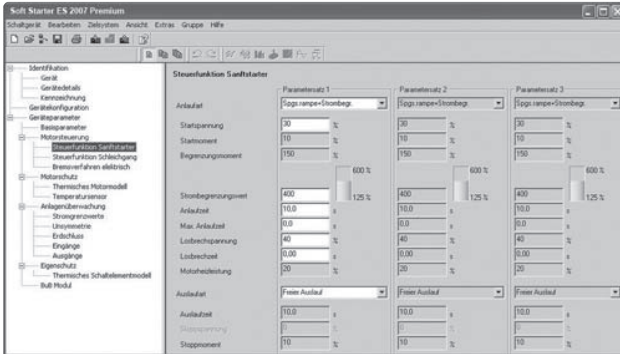

Easy and clearly arranged parameter setting of the 3RW44 soft starter with Soft Starter ES 2007

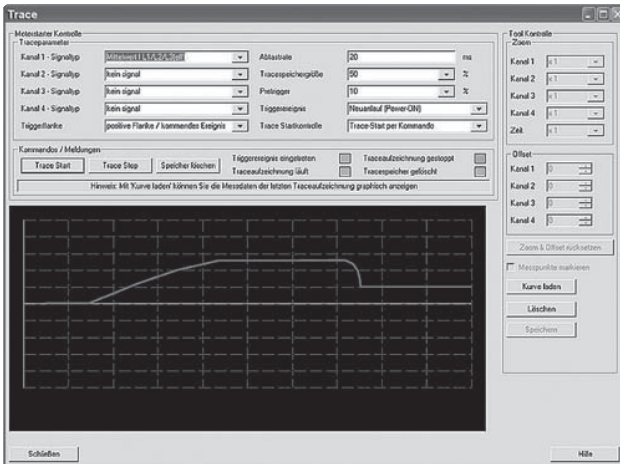

Graphic presentation of measured values with the trace function (oscilloscope function) of Soft Starter ES 2007 Standard and Premium

Soft Starter ES 2007

The Soft Starter ES software permits the quick and easy parameterization, monitoring and diagnostics of SIRIUS 3RW44 High Feature soft starters for service purposes. The device parameters can be configured directly on the PC and transferred to the soft starter through a serial cable or an optional PROFIBUS interface.

The advantages of Soft Starter ES:

- Clearly arranged configuring of device functions and their parameters – online and offline
- Effective diagnostics functions on the soft starter and display of the most important measured values
- Trace function (oscilloscope function) for recording measured values and events (in the Soft Starter ES Standard and Premium software versions).

Efficient engineering with new program versions

The Soft Starter ES software program is available in three versions which differ in their user-friendliness, scope of functions and price.

| Soft starters ES | Basic | Standard | Premium |
|---|-------|-----------------|---------|
| Access through the local interface on the device | ✓ | ✓ | ✓ |
| Parameter assignment | ✓ | ✓ | ✓ |
| Operating | ✓ | ✓ | ✓ |
| Diagnostics | ✓ | ✓ | ✓ |
| Creating templates | -- | ✓ ¹⁾ | ✓ |
| Exporting parameters | -- | ✓ | ✓ |
| Comparison functions | -- | ✓ | ✓ |
| Standards-conform printout according to EN ISO 7200 | -- | ✓ | ✓ |
| Service data (slave pointer, statistics data) | -- | ✓ | ✓ |
| Access through PROFIBUS | -- | -- | ✓ |
| Group functions | -- | -- | ✓ |
| Teleservice through MPI | -- | -- | ✓ |
| S7 Routing | -- | -- | ✓ |
| STEP7 Object Manager | -- | -- | ✓ |

¹⁾ Templates with Service Pack 1 and higher.

More functions

- Standards-conform printouts
The software tool greatly simplifies machine documentation. Parameterization printouts according to EN ISO 7200 are possible. The elements to be printed are easy to select and compile as required.
- Easy creation of parameter templates
Parameter templates can be created for devices and applications with only minimum differences in their parameters. These templates contain all the parameters which are needed for the parameterization. In addition it is possible to specify which of these parameters are fixed and which can be adapted, e. g. by the startup engineer.
- Group function
For the user-friendly parameterization of numerous devices or applications of the same type, the programs of the SIRIUS ES software family offer a group function which enables the parameterization of several devices to be read out or written through PROFIBUS. In conjunction with typical it is even possible to selectively adapt the same parameters in any number of parameterizations.
- Teleservice through MPI
The Soft Starter ES Premium version supports the use of MPI Teleservice (comprising the Teleservice software and various Teleservice adapters) for remote diagnostics of the devices. This facilitates diagnostics and maintenance, and it shortens response times for service purposes.

Soft Starter ES

Types of delivery and license

Soft Starter ES is available as follows:

- Floating license – the license for any one user at any one time
 - Authorizes any one user
 - Independent of the number of installations (unlike the single license which is allowed to be installed once only)
 - Only the actual use of the program has to be licensed
 - Trial license (free use of all program functions for 14 days for test and evaluation purposes, included on every product CD, available in the download file of the SIRIUS ES program in the Service&Support portal).

Following delivery versions are available in addition for Soft Starter ES 2007:

- Upgrade
Upgrade from an old to a new version with expanded functions, e. g. upgrade from Soft Starter ES 2006 to Soft Starter ES 2007

- Powerpack
Special pack for switching within the same software version to a more powerful version with more functionality, e. g. Powerpack Soft Starter ES 2007 for switching from Standard to Premium
- Software Update Service
To keep you up to date at all times we offer a special service which supplies you automatically with all service packs and upgrades

New licensing procedure

To make licensing easier, the three versions of Soft Starter ES are available with immediate effect with the following license:

14 day trial license for Premium functions: for test and evaluation purposes, included on every product CD, available also in the download file of the SIRIUS Soft Starter ES 2007 program at www.sea.siemens.com/softstarters.

System requirements

| Soft Starter ES 2007 parameterization, start-up and diagnostics software for the SIRIUS 3RW44 soft starter | Basic/Standard | Premium |
|--|--|--|
| | Firmware version ≥ *E04* ¹⁾ | Firmware version ≥ *E06* ²⁾ |
| Operating system | Windows 2000 (Service Pack 3 or 4), Windows XP Professional (Service Pack 2), Windows Vista Ultimate 32/ Business 32 ³⁾ | |
| Processor | ≥ Pentium 800 MHz/≥ 1 GHz (Windows Vista) | |
| RAM | ≥ 512 MB/≥ 1 GB (Windows Vista) | |
| Free space on hard disk | ≥ 150 MB | |
| CD-ROM/DVD drive | Yes (only when installing from CD) | |
| Serial interface (COM) | Yes | |
| PC cable/parameterization cable/connection cable | Yes | |
| PROFIBUS communication module (optional) | -- | Yes |

¹⁾ SIRIUS 3RW44 with firmware version ≥ *E04*. Installed in starters delivered after December 2005.

²⁾ SIRIUS 3RW44 with firmware version ≥ *E06*. Installed in starters delivered after May 2006.

³⁾ Windows Vista Ultimate 32/ Business 32 from Soft Starter ES 2007+SP1.

Selection and ordering data

Parameterization and service software for SIRIUS 3RW44 soft starters

- Can be run under WIN 2000/WIN XP PROF/Windows Vista Ultimate 32/Business 32
- Without PC cable

| Version | Order No. | List Price \$ per PU | PS* | Weight per PU approx. kg |
|--|----------------------------|----------------------|--------|--------------------------|
| Soft Starter ES 2007 Basic Floating license for one user E-SW, software and documentation on CD, 3 languages (German/English/French), communication through system interface • License key on USB stick, Class A, including CD | | | | |
| | 3ZS1 313-4CC10-0YA5 | | 1 unit | 0.230 |
| Soft Starter ES 2007 Standard Floating license for one user E-SW, software and documentation on CD, 3 languages (German/English/French), communication through system interface • License key on USB stick, Class A, including CD | | | | |
| | 3ZS1 313-5CC10-0YA5 | | 1 unit | 0.230 |

Soft Starter ES

| Version | Order No. | List Price \$ per PU | PS* | Weight per PU approx. kg |
|--|----------------------------|----------------------|--------|--------------------------|
| Upgrade for Soft Starter ES 2006 Floating license for one user, E-SW, software and documentation on CD, license key on USB stick, Class A, 3 languages (German/English/French), communication through the system interface | 3ZS1 313-5CC10-0YE5 | | 1 unit | 0.230 |
| Powerpack for Soft Starter ES 2007 Basic Floating license for one user, E-SW, software and documentation on CD, license key on USB stick, Class A, 3 languages (German/English/French), communication through the system interface | 3ZS1 313-5CC10-0YD5 | | 1 unit | 0.230 |
| Software Update Service For 1 year with automatic extension, assuming the current software version is in use, E-SW, software and documentation on CD, communication through the system interface | 3ZS1 313-5CC10-0YL5 | | 1 unit | 0.230 |

Soft Starter ES 2007 Premium

| | | | | |
|---|----------------------------|--|--------|-------|
| Floating license for one user E-SW, software and documentation on CD, 3 languages (German/English/French), communication through system interface or PROFIBUS • License key on USB stick, Class A, including CD | 3ZS1 313-6CC10-0YA5 | | 1 unit | 0.230 |
| Upgrade for Soft Starter ES 2006 Floating license for one user, E-SW, software and documentation on CD, license key on USB stick, Class A, 3 languages (German/English/French), communication through the system interface or PROFIBUS | 3ZS1 313-6CC10-0YE5 | | 1 unit | 0.230 |
| Powerpack for Soft Starter ES 2007 Standard Floating license for one user, E-SW, software and documentation on CD, license key on USB stick, Class A, 3 languages (German/English/French), communication through the system interface or PROFIBUS | 3ZS1 313-6CC10-0YD5 | | 1 unit | 0.230 |
| Software Update Service For 1 year with automatic extension, assuming the current software version is in use, E-SW, software and documentation on CD, communication through the system interface or PROFIBUS | 3ZS1 313-6CC10-0YL5 | | 1 unit | 0.230 |

PC cables



3UF7 940-0AA00-0

| | | | | |
|---|-------------------------|--|--------|-------|
| For PC/PG communication with SIRIUS 3RW44 soft starters Through the system interface, for connecting to the serial interface of the PC/PG | 3UF7 940-0AA00-0 | | 1 unit | 0.150 |
|---|-------------------------|--|--------|-------|

Serial/USB







| | | | | |
|--|-------------------------|--|--------|-------|
| For PC/PG communication with SIRIUS 3RW44 soft starters Through the system interface, for connecting to the USB interface of the PC/PG | 3UF7 946-0AA00-0 | | 1 unit | 0.150 |
|--|-------------------------|--|--------|-------|

3RW Soft Starters

3RW44 for high-feature applications



Accessories

| For soft starters | Version | Order No. | List Price \$ per PU | PS* | Weight per PU approx. kg |
|---|---|-------------------------|----------------------|--------|--------------------------|
| Type | | | | | |
| PROFIBUS communication modules | | | | | |
|  | <p>Modules can be plugged into the soft starters for integrating the starters in the PROFIBUS network with DPV1 slave functionality.</p> <p>On Y-link the soft starter has only DPV0 slave functionality.</p> | 3RW49 00-0KC00 | | 1 unit | 0.320 |
| 3RW49 00-0KC00 | | | | | |
| PROFINET communication modules | | | | | |
|  | <p>For 3RW44 soft starter integration in the PROFINET network, suitable for devices with firmware version E12 or higher</p> | 3RW49 00-0NC00 | | 1 unit | 0.320 |
| 3RW49 00-0NC00 | | | | | |
| External display and operator modules | | | | | |
|  | <p>For indicating and operating the functions provided by the soft starter using an externally mounted display and operator module in degree of protection IP54, N1, N12 (e. g. in the control cabinet door)</p> | 3RW49 00-0AC00 | | 1 unit | 0.320 |
| 3RW49 00-0AC00 | | | | | |
| Connection cables | | | | | |
| <p>From the device interface (serial) of the 3RW44 soft starter to the external display and operator module</p> <ul style="list-style-type: none"> • Length 0.5 m, flat • Length 0.5 m, round • Length 1.0 m, round • Length 2.5 m, round | | 3UF7 932-0AA00-0 | | 1 unit | 0.020 |
| | | 3UF7 932-0BA00-0 | | 1 unit | 0.050 |
| | | 3UF7 937-0BA00-0 | | 1 unit | 0.100 |
| | | 3UF7 933-0BA00-0 | | 1 unit | 0.150 |
| Box terminal blocks for soft starters | | | | | |
|  | <p>Box terminal blocks</p> <p>3RW44 2. Included in the scope of supply</p> <p>3RW44 3. <ul style="list-style-type: none">• Up to 70 mm²• Up to 120 mm²</p> <p>3RW44 4. <ul style="list-style-type: none">• Up to 240 mm²</p> | 3RT19 55-4G | | 1 unit | 0.230 |
| 3RT19 | | 3RT19 56-4G | | 1 unit | 0.260 |
| | | 3RT19 66-4G | | 1 unit | 0.676 |

3RW Soft Starters

3RW44 for high-feature applications

Spare parts

| For soft starters | Version | Order No. | List Price \$ per PU | PS* | Weight per PU approx. kg |
|--|----------------------|--|----------------------|------------------|--------------------------|
| Covers for soft starters | | | | | |
| Terminal covers for box terminals | | | | | |
| Additional touch protection to be fitted at the box terminals (2 units required per device) | | | | | |
| 3RW44 2. and 3RW44 3. | | 3RT19 56-4EA2 | | 1 unit | 0.030 |
| 3RW44 4. | | 3RT19 66-4EA2 | | 1 unit | 0.040 |
| Terminal covers for cable lugs and busbar connections | | | | | |
| 3RW44 2. and 3RW44 3. | | 3RT19 56-4EA1 | | 1 unit | 0.070 |
| 3RW44 4. | | 3RT19 66-4EA1 | | 1 unit | 0.130 |
|  3RT19 .6-4EA1 | | | | | |
| Operating instructions¹⁾ | | | | | |
| For 3RW44 soft starters | | 3ZX10 12-0RW44-1AA1 | | | |
| Fans | | | | | |
|  3RW49 | | Fans | | | |
| 3RW44 2. and 3RW44 3. | 115 V AC 230 V AC | 3RW49 36-8VX30 3RW49 36-8VX40 | | 1 unit 1 unit | 0.300 0.300 |
| 3RW44 4. | 115 V AC 230 V AC | 3RW49 47-8VX30 3RW49 47-8VX40 | | 1 unit 1 unit | 0.500 0.500 |
| 3RW44 5. and 3RW44 6. ²⁾ | 115 V AC 230 V AC | 3RW49 57-8VX30 3RW49 57-8VX40 | | 1 unit 1 unit | 0.800 0.800 |
| 3RW44 6. ³⁾ | 115 V AC 230 V AC | 3RW49 66-8VX30 3RW49 66-8VX40 | | 1 unit 1 unit | 0.300 0.300 |

¹⁾ The operating instructions are included in the scope of supply.

²⁾ 3RW44 6. mounting on output side.

³⁾ For mounting on front side.

3RW Soft Starters

3RW44 for high-feature applications

More information

Application examples for normal starting (Class 10)

Normal starting Class 10 (up to 20 s with 350 % $I_{n \text{ motor}}$).

The soft starter rating can be selected to be as high as the rating of the motor used.

| Application | Conveyor belt | Roller conveyor | Compressor | Small fan | Pump | Hydraulic pump |
|---|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Starting parameters¹⁾ | | | | | | |
| • Voltage ramp and current limiting | | | | | | |
| - Starting voltage | % 70 | 60 | 50 | 30 | 30 | 30 |
| - Starting time | s 10 | 10 | 10 | 10 | 10 | 10 |
| - Current limit value | Deactivated | Deactivated | $4 \times I_M$ | $4 \times I_M$ | Deactivated | Deactivated |
| • Torque ramp | | | | | | |
| - Starting torque | 60 | 50 | 40 | 20 | 10 | 10 |
| - End torque | 150 | 150 | 150 | 150 | 150 | 150 |
| - Starting time | 10 | 10 | 10 | 10 | 10 | 10 |
| • Breakaway pulse | Deactivated (0 ms) | Deactivated (0 ms) | Deactivated (0 ms) | Deactivated (0 ms) | Deactivated (0 ms) | Deactivated (0 ms) |
| Ramp-down mode | Smooth ramp-down | Smooth ramp-down | Free ramp-down | Free ramp-down | Pump ramp-down | Free ramp-down |

Application examples for heavy starting (Class 20)

Heavy starting Class 20 (up to 40 s with 350 % $I_{n \text{ motor}}$).

The soft starter has to be selected one rating class higher than the motor used.

| Application | Mixer | Centrifuge | Milling machine |
|---|--------------------|--------------------|------------------------------|
| Starting parameters¹⁾ | | | |
| • Voltage ramp and current limiting | | | |
| - Starting voltage | % 30 | 30 | 30 |
| - Starting time | s 30 | 30 | 30 |
| - Current limit value | $4 \times I_M$ | $4 \times I_M$ | $4 \times I_M$ |
| • Torque ramp | | | |
| - Starting torque | 30 | 30 | 30 |
| - End torque | 150 | 150 | 150 |
| - Starting time | 30 | 30 | 30 |
| • Breakaway pulse | Deactivated (0 ms) | Deactivated (0 ms) | Deactivated (0 ms) |
| Ramp-down mode | Free ramp-down | Free ramp-down | Free ramp-down or DC braking |

Application examples for very heavy starting (Class 30)

Very heavy starting Class 30 (up to 60 s with 350 % $I_{n \text{ motor}}$).

The soft starter has to be selected two rating classes higher than the motor used.

| Application | Large fan | Mill | Crushers | Circular saw/bandsaw |
|---|--------------------|----------------|----------------|----------------------|
| Starting parameters¹⁾ | | | | |
| • Voltage ramp and current limiting | | | | |
| - Starting voltage | % 30 | 50 | 50 | 30 |
| - Starting time | s 60 | 60 | 60 | 60 |
| - Current limit value | $4 \times I_M$ | $4 \times I_M$ | $4 \times I_M$ | $4 \times I_M$ |
| • Torque ramp | | | | |
| - Starting torque | 20 | 50 | 50 | 20 |
| - End torque | 150 | 150 | 150 | 150 |
| - Starting time | 60 | 60 | 60 | 60 |
| • Breakaway pulse | Deactivated (0 ms) | 80 %, 300 ms | 80 %, 300 ms | Deactivated (0 ms) |
| Ramp-down mode | Free ramp-down | Free ramp-down | Free ramp-down | Free ramp-down |

Note:

These tables present sample set values and device sizes. They are intended only for the purposes of information and are not binding. The set values depend on the application in question and must be optimized during start-up.

The soft starter dimensions should be checked where necessary with the Win-Soft Starter software or with the help of Technical Assistance.

¹⁾ Actual motor starting times are load dependent.

3RW Soft Starters


3RW44 for high-feature applications

Circuit concept


The SIRIUS 3RW44 soft starters can be operated in two different types of circuit.

- **Inline circuit**
The controls for isolating and protecting the motor are simply connected in series with the soft starter. The motor is connected to the soft starter with three cables.
- **Inside-delta circuit**
The wiring is similar to that of wye-delta starters. The phases of the soft starter are connected in series with the individual motor windings. The soft starter then only has to carry the phase current, amounting to about 58 % of the rated motor current (conductor current).

Comparison of the types of circuit

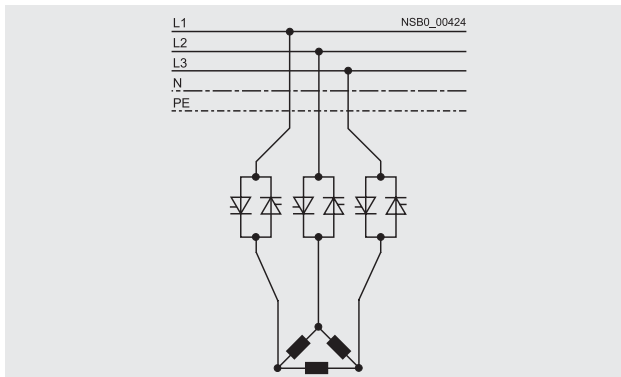

Inline circuit:
Rated current I_e corresponds to the rated motor current I_n , 3 cables to the motor

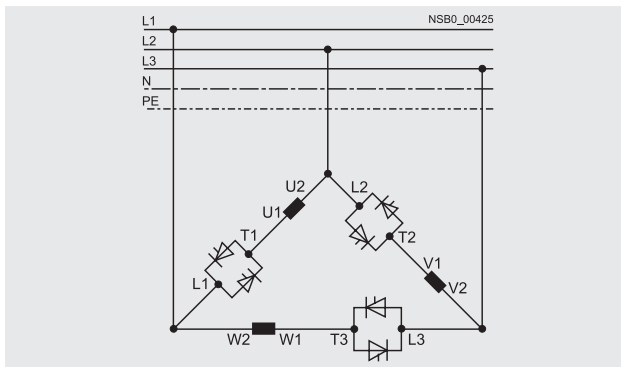

Inside-delta circuit:
Rated current I_e corresponds to approx. 58 % of the rated motor current I_n , 6 cables to the motor (as with wye-delta starters)

Which circuit?

Using the inline circuit involves the lowest wiring outlay. If the soft starter to motor connections are long, this circuit is preferable. With the inside-delta circuit there is double the wiring complexity but a smaller size of device can be used at the same rating. It is also recommended to use an isolating contactor in series with each motor winding.

Thanks to the choice of operating mode between the inline circuit and inside-delta circuit, it is always possible to select the most favorable solution.

The braking function is possible only in the inline circuit.

Configuration

The 3RW44 solid-state soft starters are designed for normal starting. In case of heavy starting or increased starting frequency, a larger device must be selected.

For long starting times it is recommended to have a PTC sensor in the motor. This also applies for the ramp-down modes smooth ramp-down, pump ramp-down and DC braking, because during the ramp-down time in these modes, an additional current load applies in contrast to free ramp-down.

In the motor feeder between the SIRIUS 3RW soft starter and the motor, no capacitive elements are permitted (e. g. no reactive-power compensation equipment). In addition, neither static systems for reactive-power compensation nor dynamic PFC (Power Factor Correction) must be operated in parallel during starting and ramp-down of the soft starter. This is important to prevent faults arising on the compensation equipment and/or the soft starter.

All elements of the main circuit (such as fuses and controls) should be dimensioned for direct starting, following the local short-circuit conditions. Fuses, controls and overload relays must be ordered separately.

A bypass contact system and solid-state overload relay are already integrated in the 3RW44 soft starter and therefore do not have to be ordered separately.

The harmonic component load for starting currents must be taken into consideration for the selection of motor starter protectors (selection of release).

Note:

When induction motors are switched on, voltage drops normally appear on starters of all types (direct starters, wye-delta starters, soft starters). The infeed transformer must always be dimensioned such that the voltage dip when starting the motor remains within the permissible tolerance. If the infeed transformer is dimensioned with only a small margin, it is best for the control voltage to be supplied from a separate circuit (independently of the main voltage) in order to avoid the potential switching off of the soft starter.

Device interface, PROFIBUS DP communication module, Soft Starter ES parameterizing and operating software

The 3RW44 electronic soft starters have a PC interface for communicating with the Soft Starter ES software or for connecting the external display and operator module. If the optional PROFIBUS communication module is used, the 3RW44 soft starter can be integrated in the PROFIBUS network and communicate using the GSD file or Soft Starter ES Premium software.

3RW Soft Starters

3RW44 for high-feature applications

System Manual for SIRIUS 3RW44

Besides containing all important information on configuring, commissioning and servicing, the manual also contains example circuits and the technical specifications for all devices. This manual can be downloaded off the internet.

Win-Soft Starter selection and simulation program

With this software, you can simulate and select all Siemens soft starters, taking into account various parameters such as mains properties, motor and load data, and special application requirements.

The software is a valuable tool, which makes complicated, lengthy manual calculations for determining the required soft starters superfluous.

The Win-Soft Starter selection and simulation program can be downloaded free of charge from:

www.usa.siemens.com/softstarters > Software

More information can be found on the Internet at:

www.usa.siemens.com/softstarters

3RW Soft Starters

Soft starters for enclosed applications

Overview

The family of 3RW40 and 3RW44 softstarters are available in stand alone enclosed control designs for smooth starting and stopping of standard NEMA design B three phase inductive motors, thus eliminating physical stresses to the system and load while minimizing starting current. These pre-engineered enclosed designs offer convenience and flexibility in and UL/CSA certified offering. Enclosed styles are available in combination and non-combination configurations through 600HP and system voltages of 200V, 230V, 480V, and 600V.

The Class 73 offers either the 3RW40 or 3RW44 in a non-combination style offering. These non-combination styles come standard with a choice of Type 1, 3R, 12, 4 NEMA rated enclosure, a control transformer, Sirius softstarter with built-in overload and bypass, line side power terminal block, and a reset pushbutton. The enclosed offering can be powerfully matched with a wide variety of factory modified options such as pushbutton control, pilot lights, metering and other control options such as isolation contactors and emergency start bypass starters. 3RW44 enclosed styles are also available with optional through the door keypad and Profibus communication.

The Class 74 offering includes all of the features of the Class 73 in a combination style design. Standard options are either a circuit breaker or fusible disconnect providing short circuit protection and soft starting in one package.

Application

The Class 73/74 product is a fully enclosed solid state reduced voltage starter designed for a wide variety of industrial applications. The enclosed softstarter offerings are ideal for new as well as existing applications where total motor controls is required.

Proper selection based on application data is made simple following these easy steps:

- Select proper RVSS by application
 - Select the 3RW40 versus the 3RW44 using the application info provided in the open section of the catalog
- Select the rating chart for normal starting or sever duty starting
 - Normal starting is rated at 350% of rated motor current IM for 10 seconds and based on starts per hour – representative of a class 20 application.
 - Severe starting is rated at 350% of rated motor current Im for 20 seconds and based on starts per hour – representative of a Class 20 application
- Select model using Motor nameplate data
 - Identify correct motor voltage column
 - Select rate current or HP row
 - Find ordering number under desired enclosure type column (e.g. NEMA 1)
 - Select appropriate system voltage
- Select factory modification on page 6/40¹⁾


Example:
3RW44, N12, CB disconnect, 460V, 200HP with a start/stop and red run light

Order No.
74MT34BFAP A1 FC

Product Nomenclature

Class 73 and 74 Enclosed Soft Starters

7
SOFT STARTERS

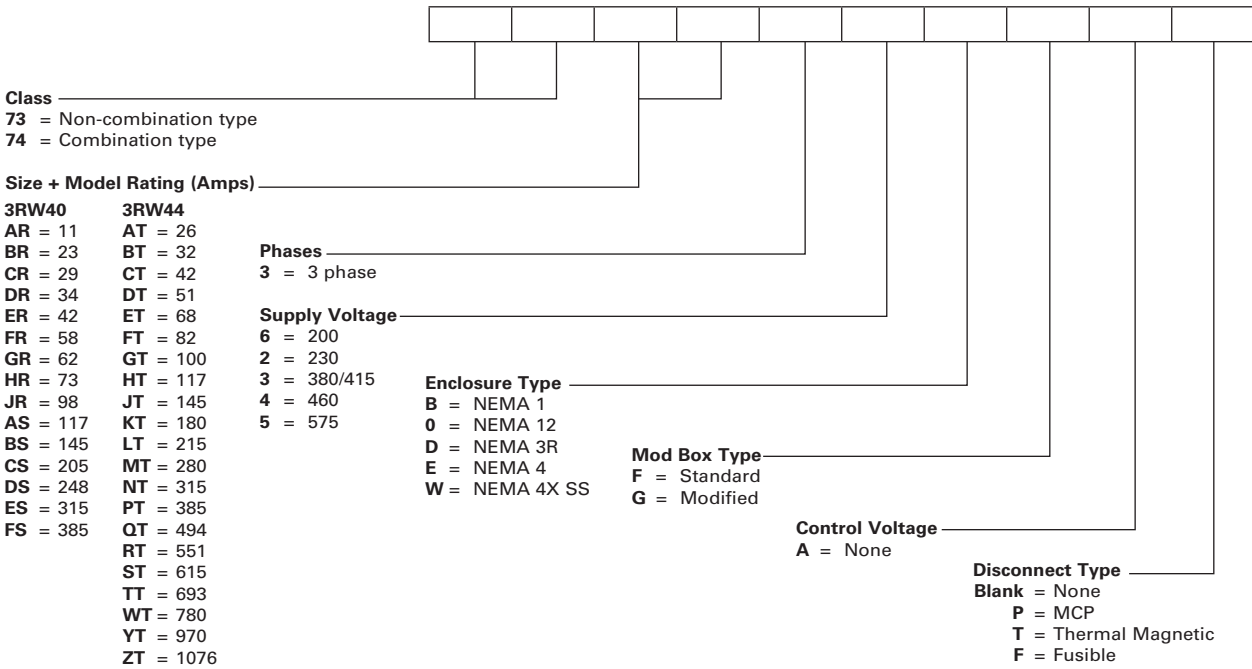

¹⁾ Some modifications will require a larger 'Modified' box than the standard box e.g. Isolation contactor, space heater, etc. See page 7/43 for instructions.

3RW Soft Starters

3RW40 Size S0-S3 Non-Combo



3RW40 Enclosed features:

- Available in NEMA 1,12,3R,4, and 4 stainless steel
- Compact size
- Built-in Bypass contactor
- Voltage ramp up and ramp down
- Current limit adjustment of 125 - 550%
- Internal overload class 10,15,or 20
- Internal self protection
- Fault monitoring
- Isolation Contactor

Ordering Information

- ▶ Enclosed devices should be ordered by the FLA of the motor.
- ▶ The 3RW40 is designed for normal starting applications.
- ▶ For factory modifications see page 7/43.
- ▶ For complete derating and application info see page 7/59
- ▶ For dimensional drawings see page 7/95.

Class 73 non-combination starters include:

- NEMA rated enclosure
- 3RW40 Sirius softstarter with built-in OL and bypass
- Control Circuit Transformer
- Line side power terminal block
- Reset button
- Isolation Contactor

Ideal applications for 3RW40 enclosed softstarters

- Fans
- Pumps
- Easy starting loads starting in less than 10 seconds

Class 73 starters are built to UL and CSA standards

3RW40 for Standard Applications

Enclosed Non-Combination (Starter Only)

| Rated Operating Current | MAX HP ^① | | | | KW | Class 10 Light Duty (350% * Ie for 10s) ^② | | | | | | | | | |
|-------------------------|---------------------|------|------|------|----|--|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ |
| 11 | 3 | 3 | 7.5 | — | 6 | 3RW4024-1BB14 | 73AR3_BFA | | 73AR3_DFA | | 73AR3_OFA | | 73AR3_EFA | | 73AR3_WFA |
| 23 | 5 | 7.5 | 15 | — | 13 | 3RW4026-1BB14 | 73BR3_BFA | | 73BR3_DFA | | 73BR3_OFA | | 73BR3_EFA | | 73BR3_WFA |
| 29 | 7.5 | 10 | 20 | — | 16 | 3RW4027-1BB14 | 73CR3_BFA | | 73CR3_DFA | | 73CR3_OFA | | 73CR3_EFA | | 73CR3_WFA |
| 34 | 10 | 10 | 25 | — | 18 | 3RW4028-1BB14 | 73DR3_BFA | | 73DR3_DFA | | 73DR3_OFA | | 73DR3_EFA | | 73DR3_WFA |
| 42 | 10 | 15 | 30 | — | 23 | 3RW4036-1BB14 | 73ER3_BFA | | 73ER3_DFA | | 73ER3_OFA | | 73ER3_EFA | | 73ER3_WFA |
| 58 | 15 | 20 | 40 | — | 31 | 3RW4037-1BB14 | 73FR3_BFA | | 73FR3_DFA | | 73FR3_OFA | | 73FR3_EFA | | 73FR3_WFA |
| 62 | 20 | 20 | 40 | — | 33 | 3RW4038-1BB14 | 73GR3_BFA | | 73GR3_DFA | | 73GR3_OFA | | 73GR3_EFA | | 73GR3_WFA |
| 73 | 20 | 25 | 50 | — | 39 | 3RW4046-1BB14 | 73HR3_BFA | | 73HR3_DFA | | 73HR3_OFA | | 73HR3_EFA | | 73HR3_WFA |
| 98 | 30 | 30 | 75 | — | 52 | 3RW4047-1BB14 | 73JR3_BFA | | 73JR3_DFA | | 73JR3_OFA | | 73JR3_EFA | | 73JR3_WFA |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C

② Starter selection is dependent on type of application. Ie = FLA rating of motor

3RW Soft Starters

Enclosed 3RW40



3RW40 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Voltage ramp up and ramp down
- Current limit adjustment of 125 - 550%
- Internal overload class 10, 15, or 20
- Internal self protection
- Fault monitoring

Ordering Information

- ▶ Enclosed devices should be ordered by the FLA of the motor.
- ▶ The 3RW40 is designed for normal starting applications (Class 10 applications).
- ▶ For factory modifications see page 7/43.
- ▶ For complete derating and application info see page 7/59.
- ▶ For dimensional drawings see page 7/95.

Class 73 non-combination starters include:

- NEMA rated enclosure
- 3RW40 Sirius softstarter with built-in OL and bypass
- Control circuit transformer
- Line side power terminal block
- Reset button

Ideal applications for 3RW40 enclosed softstarters:

- Fans
- Pumps
- Building/construction machines
- Presses
- Escalators
- Transport systems
- Air conditioning systems
- Ventilators
- Assembly lines

Class 73 starters are built to UL and CSA standards.

For all technical information, please consult the 2006 Industrial Controls Catalog or contact your local sales support center.

3RW40 for Standard Applications

Enclosed Non-Combination (Starter Only)

| Rated Operating Current | MAX HP ^① | | | | kW | Class 10 Light Duty (350% * Im for 10s) ^② | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|-----|--|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel |
| 117 | 30 | 40 | 75 | — | 56 | 3RW4055-6BB34 | 73AS3_BFA | | 73AS3_DFA | | 73AS3_OFA | | 73AS3_EFA | | 73AS3_WFA | |
| 145 | 40 | 50 | 100 | — | 75 | 3RW4056-6BB34 | 73BS3_BFA | | 73BS3_DFA | | 73BS3_OFA | | 73BS3_EFA | | 73BS3_WFA | |
| 205 | 60 | 75 | 150 | — | 112 | 3RW4073-6BB34 | 73CS3_BFA | | 73CS3_DFA | | 73CS3_OFA | | 73CS3_EFA | | 73CS3_WFA | |
| 248 | 75 | 100 | 200 | — | 149 | 3RW4074-6BB34 | 73DS3_BFA | | 73DS3_DFA | | 73DS3_OFA | | 73DS3_EFA | | 73DS3_WFA | |
| 315 | 100 | 125 | 250 | — | 186 | 3RW4075-6BB34 | 73ES3_BFA | | 73ES3_DFA | | 73ES3_OFA | | 73ES3_EFA | | 73ES3_WFA | |
| 385 | 125 | 150 | 300 | — | 224 | 3RW4076-6BB34 | 73FS3_BFA | | 73FS3_DFA | | 73FS3_OFA | | 73FS3_EFA | | 73FS3_WFA | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | |
| 117 | — | — | 75 | 100 | — | 3RW4055-6BB35 | 73AS35BFA | | 73AS35DFA | | 73AS35OFA | | 73AS35EFA | | 73AS35WFA | |
| 145 | — | — | 100 | 150 | — | 3RW4056-6BB35 | 73BS35BFA | | 73BS35DFA | | 73BS35OFA | | 73BS35EFA | | 73BS35WFA | |
| 205 | — | — | 150 | 200 | — | 3RW4073-6BB35 | 73CS35BFA | | 73CS35DFA | | 73CS35OFA | | 73CS35EFA | | 73CS35WFA | |
| 248 | — | — | 200 | 250 | — | 3RW4074-6BB35 | 73DS35BFA | | 73DS35DFA | | 73DS35OFA | | 73DS35EFA | | 73DS35WFA | |
| 315 | — | — | 250 | 300 | — | 3RW4075-6BB35 | 73ES35BFA | | 73ES35DFA | | 73ES35OFA | | 73ES35EFA | | 73ES35WFA | |
| 385 | — | — | 300 | 400 | — | 3RW4076-6BB35 | 73FS35BFA | | 73FS35DFA | | 73FS35OFA | | 73FS35EFA | | 73FS35WFA | |

Enclosed Non-Combination (Starter Only)

| Rated Operating Current | MAX HP ^① | | | | kW | Class 20 Severe Duty (350% * Ie for 20s) ^② | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|-----|---|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel |
| 112 | 30 | 40 | 75 | — | 56 | 3RW4055-6BB34 | 73AS3_BFA | | 73AS3_DFA | | 73AS3_OFA | | 73AS3_EFA | | 73AS3_WFA | |
| 132 | 40 | 50 | 100 | — | 75 | 3RW4056-6BB34 | 73BS3_BFA | | 73BS3_DFA | | 73BS3_OFA | | 73BS3_EFA | | 73BS3_WFA | |
| 185 | 60 | 60 | 125 | — | 93 | 3RW4073-6BB34 | 73CS3_BFA | | 73CS3_DFA | | 73CS3_OFA | | 73CS3_EFA | | 73CS3_WFA | |
| 205 | 60 | 75 | 150 | — | 112 | 3RW4074-6BB34 | 73DS3_BFA | | 73DS3_DFA | | 73DS3_OFA | | 73DS3_EFA | | 73DS3_WFA | |
| 280 | 75 | 100 | 200 | — | 149 | 3RW4075-6BB34 | 73ES3_BFA | | 73ES3_DFA | | 73ES3_OFA | | 73ES3_EFA | | 73ES3_WFA | |
| 340 | 100 | 125 | 250 | — | 186 | 3RW4076-6BB34 | 73FS3_BFA | | 73FS3_DFA | | 73FS3_OFA | | 73FS3_EFA | | 73FS3_WFA | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | |
| 112 | — | — | 75 | 75 | — | 3RW4055-6BB35 | 73AS35BFA | | 73AS35DFA | | 73AS35OFA | | 73AS35EFA | | 73AS35WFA | |
| 132 | — | — | 100 | 125 | — | 3RW4056-6BB35 | 73BS35BFA | | 73BS35DFA | | 73BS35OFA | | 73BS35EFA | | 73BS35WFA | |
| 185 | — | — | 125 | 150 | — | 3RW4073-6BB35 | 73CS35BFA | | 73CS35DFA | | 73CS35OFA | | 73CS35EFA | | 73CS35WFA | |
| 205 | — | — | 150 | 200 | — | 3RW4074-6BB35 | 73DS35BFA | | 73DS35DFA | | 73DS35OFA | | 73DS35EFA | | 73DS35WFA | |
| 280 | — | — | 200 | 250 | — | 3RW4075-6BB35 | 73ES35BFA | | 73ES35DFA | | 73ES35OFA | | 73ES35EFA | | 73ES35WFA | |
| 340 | — | — | 250 | 300 | — | 3RW4076-6BB35 | 73FS35BFA | | 73FS35DFA | | 73FS35OFA | | 73FS35EFA | | 73FS35WFA | |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor.

HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

3RW Soft Starters

3RW40 – Size S0-S3 Circuit Breaker



3RW40 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in Bypass contactor
- Voltage ramp up and ramp down
- Current limit adjustment of 125 - 550%
- Internal overload class 10, 15, or 20
- Internal self protection
- Fault monitoring
- Isolation Contactor

Ordering Information

- ▶ Enclosed devices should be ordered by the FLA of the motor.
- ▶ The 3RW40 is designed for normal starting applications.
- ▶ For factory modifications see page 7/43.
- ▶ For complete derating and application info see page 7/59
- ▶ For dimensional drawings see page 7/95.

Class 74 non-combination starters include:

- NEMA rated enclosure
- Circuit Breaker disconnect with shunt trip
- 3RW40 Sirius softstarter with built-in OL and bypass
- Control Circuit Transformer
- Isolation Contactor

Ideal applications for 3RW40 enclosed softstarters

- Fans
- Pumps
- Easy starting loads starting in less than 10 seconds

Class 74 starters are built to UL and CSA standards

3RW40 for Standard Applications

Enclosed Circuit Breaker Combination (Starter With Circuit Breaker Disconnect)

| Rated Operating Current | MAX HP ^① | | | | KW | Class 10 Light Duty (350% * Ie for 10s) ^② | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|----|--|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel |
| 11 | 3 | 3 | 7.5 | — | 6 | 3RW4024-1BB14 | 74AR3_BFAP | | 74AR3_DFAP | | 74AR3_OFAP | | 74AR3_EFAP | | 74AR3_WFAP | |
| 23 | 5 | 7.5 | 15 | — | 13 | 3RW4026-1BB14 | 74BR3_BFAP | | 74BR3_DFAP | | 74BR3_OFAP | | 74BR3_EFAP | | 74BR3_WFAP | |
| 29 | 7.5 | 10 | 20 | — | 16 | 3RW4027-1BB14 | 74CR3_BFAP | | 74CR3_DFAP | | 74CR3_OFAP | | 74CR3_EFAP | | 74CR3_WFAP | |
| 34 | 10 | 10 | 25 | — | 18 | 3RW4028-1BB14 | 74DR3_BFAP | | 74DR3_DFAP | | 74DR3_OFAP | | 74DR3_EFAP | | 74DR3_WFAP | |
| 42 | 10 | 15 | 30 | — | 23 | 3RW4036-1BB14 | 74ER3_BFAP | | 74ER3_DFAP | | 74ER3_OFAP | | 74ER3_EFAP | | 74ER3_WFAP | |
| 58 | 15 | 20 | 40 | — | 31 | 3RW4037-1BB14 | 74FR3_BFAP | | 74FR3_DFAP | | 74FR3_OFAP | | 74FR3_EFAP | | 74FR3_WFAP | |
| 62 | 20 | 20 | 40 | — | 33 | 3RW4038-1BB14 | 74GR3_BFAP | | 74GR3_DFAP | | 74GR3_OFAP | | 74GR3_EFAP | | 74GR3_WFAP | |
| 73 | 20 | 25 | 50 | — | 39 | 3RW4046-1BB14 | 74HR3_BFAP | | 74HR3_DFAP | | 74HR3_OFAP | | 74HR3_EFAP | | 74HR3_WFAP | |
| 98 | 30 | 30 | 75 | — | 52 | 3RW4047-1BB14 | 74JR3_BFAP | | 74JR3_DFAP | | 74JR3_OFAP | | 74JR3_EFAP | | 74JR3_WFAP | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C

② Starter selection is dependent on type of application. Ie = FLA rating of motor

Enclosed 3RW44



3RW40 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Voltage ramp up and ramp down
- Current limit adjustment of 125 - 550%
- Internal overload class 10, 15, or 20
- Internal self protection
- Fault monitoring

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW40 is designed for normal starting applications (Class 10 applications).
- For factory modifications see page 7/43.
- For complete derating and application info see page 7/70.
- For dimensional drawings see page 7/95.

Class 74 non-combination starters include:

- NEMA rated enclosure
- Circuit breaker disconnect with shunt trip
- 3RW40 Sirius softstarter with built-in OL and bypass
- Control circuit transformer

Ideal applications for 3RW40 enclosed softstarters:

- Fans
- Pumps
- Building/construction machines
- Presses
- Escalators
- Transport systems
- Air conditioning systems
- Ventilators
- Assembly lines

Class 74 starters are built to UL and CSA standards.

For all technical information, please consult the 2006 Industrial Controls Catalog or contact your local sales support center.

3RW40 for Standard Applications

Enclosed Circuit Breaker Combination (Starter with Circuit Breaker Disconnect)

| Rated Operating Current | MAX HP ^① | | | | KW | Class 10 Light Duty (350% * I _m for 10s) ^② | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|-----|--|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel |
| 117 | 30 | 40 | 75 | — | 56 | 3RW4055-6BB34 | 74AS3_BFAP | | 74AS3_DFAP | | 74AS3_OFAP | | 74AS3_EFAP | | 74AS3_WFAP | |
| 145 | 40 | 50 | 100 | — | 75 | 3RW4056-6BB34 | 74BS3_BFAP | | 74BS3_DFAP | | 74BS3_OFAP | | 74BS3_EFAP | | 74BS3_WFAP | |
| 205 | 60 | 75 | 150 | — | 112 | 3RW4073-6BB34 | 74CS3_BFAP | | 74CS3_DFAP | | 74CS3_OFAP | | 74CS3_EFAP | | | |
| 248 | 75 | 100 | 200 | — | 149 | 3RW4074-6BB34 | 74DS3_BFAP | | 74DS3_DFAP | | 74DS3_OFAP | | 74DS3_EFAP | | | |
| 315 | 100 | 125 | 250 | — | 186 | 3RW4075-6BB34 | 74ES3_BFAP | | 74ES3_DFAP | | 74ES3_OFAP | | 74ES3_EFAP | | | |
| 385 | 125 | 150 | 300 | — | 224 | 3RW4076-6BB34 | 74FS3_BFAP | | 74FS3_DFAP | | 74FS3_OFAP | | 74FS3_EFAP | | | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | |
| 117 | — | — | 75 | 100 | — | 3RW4055-6BB35 | 74AS35BFAP | | 74AS35DFAP | | 74AS350FAP | | 74AS35EFAP | | 74AS35WFAP | |
| 145 | — | — | 100 | 150 | — | 3RW4056-6BB35 | 74BS35BFAP | | 74BS35DFAP | | 74BS350FAP | | 74BS35EFAP | | 74BS35WFAP | |
| 205 | — | — | 150 | 200 | — | 3RW4073-6BB35 | 74CS35BFAP | | 74CS35DFAP | | 74CS350FAP | | 74CS35EFAP | | | |
| 248 | — | — | 200 | 250 | — | 3RW4074-6BB35 | 74DS35BFAP | | 74DS35DFAP | | 74DS350FAP | | 74DS35EFAP | | | |
| 315 | — | — | 250 | 300 | — | 3RW4075-6BB35 | 74ES35BFAP | | 74ES35DFAP | | 74ES350FAP | | 74ES35EFAP | | | |
| 385 | — | — | 300 | 400 | — | 3RW4076-6BB35 | 74FS35BFAP | | 74FS35DFAP | | 74FS350FAP | | 74FS35EFAP | | | |

Enclosed Circuit Breaker Combination (Starter with Circuit Breaker Disconnect)

| Rated Operating Current | MAX HP ^① | | | | KW | Class 20 Severe Duty (350% * I _e for 20s) ^② | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|-----|---|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel |
| 112 | 30 | 40 | 75 | — | 56 | 3RW4055-6BB34 | 74AS3_BFAP | | 74AS3_DFAP | | 74AS3_OFAP | | 74AS3_EFAP | | 74AS3_WFAP | |
| 132 | 40 | 50 | 100 | — | 75 | 3RW4056-6BB34 | 74BS3_BFAP | | 74BS3_DFAP | | 74BS3_OFAP | | 74BS3_EFAP | | 74BS3_WFAP | |
| 185 | 60 | 60 | 125 | — | 93 | 3RW4073-6BB34 | 74CS3_BFAP | | 74CS3_DFAP | | 74CS3_OFAP | | 74CS3_EFAP | | | |
| 205 | 60 | 75 | 150 | — | 112 | 3RW4074-6BB34 | 74DS3_BFAP | | 74DS3_DFAP | | 74DS3_OFAP | | 74DS3_EFAP | | | |
| 280 | 75 | 100 | 200 | — | 149 | 3RW4075-6BB34 | 74ES3_BFAP | | 74ES3_DFAP | | 74ES3_OFAP | | 74ES3_EFAP | | | |
| 340 | 100 | 125 | 250 | — | 186 | 3RW4076-6BB34 | 74FS3_BFAP | | 74FS3_DFAP | | 74FS3_OFAP | | 74FS3_EFAP | | | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | |
| 112 | — | — | 75 | 75 | — | 3RW4055-6BB35 | 74AS35BFAP | | 74AS35DFAP | | 74AS350FAP | | 74AS35EFAP | | 74AS35WFAP | |
| 132 | — | — | 100 | 125 | — | 3RW4056-6BB35 | 74BS35BFAP | | 74BS35DFAP | | 74BS350FAP | | 74BS35EFAP | | 74BS35WFAP | |
| 185 | — | — | 125 | 150 | — | 3RW4073-6BB35 | 74CS35BFAP | | 74CS35DFAP | | 74CS350FAP | | 74CS35EFAP | | | |
| 205 | — | — | 150 | 200 | — | 3RW4074-6BB35 | 74DS35BFAP | | 74DS35DFAP | | 74DS350FAP | | 74DS35EFAP | | | |
| 280 | — | — | 200 | 250 | — | 3RW4075-6BB35 | 74ES35BFAP | | 74ES35DFAP | | 74ES350FAP | | 74ES35EFAP | | | |
| 340 | — | — | 250 | 300 | — | 3RW4076-6BB35 | 74FS35BFAP | | 74FS35DFAP | | 74FS350FAP | | 74FS35EFAP | | | |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. I_m = FLA rating of motor.

3RW Soft Starters

3RW40 – Size S0-S3 Fusible



- 3RW40 Enclosed features:
- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
 - Compact size
 - Built-in Bypass contactor
 - Voltage ramp up and ramp down
 - Current limit adjustment of 125 - 550%
 - Internal overload class 10,15, or 20
 - Internal self protection
 - Fault monitoring
 - Isolation Contactor

Ordering Information

- ▶ Enclosed devices should be ordered by the FLA of the motor.
- ▶ The 3RW40 is designed for normal starting applications.
- ▶ For factory modifications see page 7/43.
- ▶ For complete derating and application info see page 7/59
- ▶ For dimensional drawings see page 7/95.

Ideal applications for 3RW40 enclosed softstarters

- Fans
- Pumps
- Easy starting loads starting in less than 10 seconds

Class 74 starters are built to UL and CSA standards

- Class 73 non-combination starters include:
- NEMA rated enclosure
 - Fusible Disconnect
 - 3RW40 Sirius softstarter with built-in OL and bypass
 - Control Circuit Transformer
 - Isolation Contactor

3RW40 for Standard Applications

Enclosed Fusible Combination (Starter With Fusible Disconnect)

| Rated Operating Current | MAX HP ^① | | | | KW | Class 10 Light Duty (350% * I _e for 10s) ^② | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|----|--|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel |
| 11 | 3 | 3 | 7.5 | — | 6 | 3RW4024-1BB14 | 74AR3_BFAF | | 74AR3_DFAF | | 74AR3_OFAF | | 74AR3_EFAF | | 74AR3_WFAF | |
| 23 | 5 | 7.5 | 15 | — | 13 | 3RW4026-1BB14 | 74BR3_BFAF | | 74BR3_DFAF | | 74BR3_OFAF | | 74BR3_EFAF | | 74BR3_WFAF | |
| 29 | 7.5 | 10 | 20 | — | 16 | 3RW4027-1BB14 | 74CR3_BFAF | | 74CR3_DFAF | | 74CR3_OFAF | | 74CR3_EFAF | | 74CR3_WFAF | |
| 34 | 10 | 10 | 25 | — | 18 | 3RW4028-1BB14 | 74DR3_BFAF | | 74DR3_DFAF | | 74DR3_OFAF | | 74DR3_EFAF | | 74DR3_WFAF | |
| 42 | 10 | 15 | 30 | — | 23 | 3RW4036-1BB14 | 74ER3_BFAF | | 74ER3_DFAF | | 74ER3_OFAF | | 74ER3_EFAF | | 74ER3_WFAF | |
| 58 | 15 | 20 | 40 | — | 31 | 3RW4037-1BB14 | 74FR3_BFAF | | 74FR3_DFAF | | 74FR3_OFAF | | 74FR3_EFAF | | 74FR3_WFAF | |
| 62 | 20 | 20 | 40 | — | 33 | 3RW4038-1BB14 | 74GR3_BFAF | | 74GR3_DFAF | | 74GR3_OFAF | | 74GR3_EFAF | | 74GR3_WFAF | |
| 73 | 20 | 25 | 50 | — | 39 | 3RW4046-1BB14 | 74HR3_BFAF | | 74HR3_DFAF | | 74HR3_OFAF | | 74HR3_EFAF | | 74HR3_WFAF | |
| 98 | 30 | 30 | 75 | — | 52 | 3RW4047-1BB14 | 74JR3_BFAF | | 74JR3_DFAF | | 74JR3_OFAF | | 74JR3_EFAF | | 74JR3_WFAF | |
| | | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 |
| | | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 |
| | | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 |
| | | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C

② Starter selection is dependent on type of application. I_e = FLA rating of motor

Enclosed 3RW44



- 3RW40 Enclosed features:
- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
 - Compact size
 - Built-in bypass contactor
 - Voltage ramp up and ramp down
 - Current limit adjustment of 125 - 550%
 - Internal overload class 10, 15, or 20
 - Internal self protection
 - Fault monitoring

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW40 is designed for normal starting applications (Class 10 applications).
- For factory modifications see page 7/43.
- For complete derating and application info see page 7/70.
- For dimensional drawings see page 7/95.

Class 74 combination starters include:

- NEMA rated enclosure
- Fusible disconnect
- 3RW40 Sirius softstarter with built-in OL and bypass
- Control circuit transformer

Ideal applications for 3RW40 enclosed softstarters:

- Fans
- Pumps
- Building/construction machines
- Presses
- Escalators
- Transport systems
- Air conditioning systems
- Ventilators
- Assembly lines

Class 74 starters are built to UL and CSA standards.

For all technical information, please consult the 2006 Industrial Controls Catalog or contact your local sales support center.

3RW40 for Standard Applications

Enclosed Fusible Combination (Starter with Fusible Disconnect)

| Rated Operating Current | MAX HP ^① | | | | KW | Class 10 Light Duty (350% * Im for 10s) ^② | | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|-----|--|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|---------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel | List Price \$ |
| 117 | 30 | 40 | 75 | — | 56 | 3RW4055-6BB34 | 74AS3_BFAF | | 74AS3_DFAF | | 74AS3_0FAF | | 74AS3_EFAF | | 74AS3_WFAF | | |
| 145 | 40 | 50 | 100 | — | 75 | 3RW4056-6BB34 | 74BS3_BFAF | | 74BS3_DFAF | | 74BS3_0FAF | | 74BS3_EFAF | | 74BS3_WFAF | | |
| 205 | 60 | 75 | 150 | — | 112 | 3RW4073-6BB34 | 74CS3_BFAF | | 74CS3_DFAF | | 74CS3_0FAF | | 74CS3_EFAF | | | | |
| 248 | 75 | 100 | 200 | — | 149 | 3RW4074-6BB34 | 74DS3_BFAF | | 74DS3_DFAF | | 74DS3_0FAF | | 74DS3_EFAF | | | | |
| 315 | 100 | 125 | 250 | — | 186 | 3RW4075-6BB34 | 74ES3_BFAF | | 74ES3_DFAF | | 74ES3_0FAF | | 74ES3_EFAF | | | | |
| 385 | 125 | 150 | 300 | — | 224 | 3RW4076-6BB34 | 74FS3_BFAF | | 74FS3_DFAF | | 74FS3_0FAF | | 74FS3_EFAF | | | | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | | |
| 117 | — | — | 75 | 100 | — | 3RW4055-6BB35 | 74AS35BFAF | | 74AS35DFAF | | 74AS350FAF | | 74AS35EFAF | | 74AS35WFAF | | |
| 145 | — | — | 100 | 150 | — | 3RW4056-6BB35 | 74BS35BFAF | | 74BS35DFAF | | 74BS350FAF | | 74BS35EFAF | | 74BS35WFAF | | |
| 205 | — | — | 150 | 200 | — | 3RW4073-6BB35 | 74CS35BFAF | | 74CS35DFAF | | 74CS350FAF | | 74CS35EFAF | | | | |
| 248 | — | — | 200 | 250 | — | 3RW4074-6BB35 | 74DS35BFAF | | 74DS35DFAF | | 74DS350FAF | | 74DS35EFAF | | | | |
| 315 | — | — | 250 | 300 | — | 3RW4075-6BB35 | 74ES35BFAF | | 74ES35DFAF | | 74ES350FAF | | 74ES35EFAF | | | | |
| 385 | — | — | 300 | 400 | — | 3RW4076-6BB35 | 74FS35BFAF | | 74FS35DFAF | | 74FS350FAF | | 74FS35EFAF | | | | |

Enclosed Fusible Combination (Starter with Fusible Disconnect)

| Rated Operating Current | MAX HP ^① | | | | KW | Class 20 Severe Duty (350% * Ie for 20s) ^② | | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|-----|---|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|---------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel | List Price \$ |
| 112 | 30 | 40 | 75 | — | 56 | 3RW4055-6BB34 | 74AS3_BFAF | | 74AS3_DFAF | | 74AS3_0FAF | | 74AS3_EFAF | | 74AS3_WFAF | | |
| 132 | 40 | 50 | 100 | — | 75 | 3RW4056-6BB34 | 74BS3_BFAF | | 74BS3_DFAF | | 74BS3_0FAF | | 74BS3_EFAF | | 74BS3_WFAF | | |
| 185 | 60 | 60 | 125 | — | 93 | 3RW4073-6BB34 | 74CS3_BFAF | | 74CS3_DFAF | | 74CS3_0FAF | | 74CS3_EFAF | | | | |
| 205 | 60 | 75 | 150 | — | 112 | 3RW4074-6BB34 | 74DS3_BFAF | | 74DS3_DFAF | | 74DS3_0FAF | | 74DS3_EFAF | | | | |
| 280 | 75 | 100 | 200 | — | 149 | 3RW4075-6BB34 | 74ES3_BFAF | | 74ES3_DFAF | | 74ES3_0FAF | | 74ES3_EFAF | | | | |
| 340 | 100 | 125 | 250 | — | 186 | 3RW4076-6BB34 | 74FS3_BFAF | | 74FS3_DFAF | | 74FS3_0FAF | | 74FS3_EFAF | | | | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | | |
| 112 | — | — | 75 | 75 | — | 3RW4055-6BB35 | 74AS35BFAF | | 74AS35DFAF | | 74AS350FAF | | 74AS35EFAF | | 74AS35WFAF | | |
| 132 | — | — | 100 | 125 | — | 3RW4056-6BB35 | 74BS35BFAF | | 74BS35DFAF | | 74BS350FAF | | 74BS35EFAF | | 74BS35WFAF | | |
| 185 | — | — | 125 | 150 | — | 3RW4073-6BB35 | 74CS35BFAF | | 74CS35DFAF | | 74CS350FAF | | 74CS35EFAF | | | | |
| 205 | — | — | 150 | 200 | — | 3RW4074-6BB35 | 74DS35BFAF | | 74DS35DFAF | | 74DS350FAF | | 74DS35EFAF | | | | |
| 280 | — | — | 200 | 250 | — | 3RW4075-6BB35 | 74ES35BFAF | | 74ES35DFAF | | 74ES350FAF | | 74ES35EFAF | | | | |
| 340 | — | — | 250 | 300 | — | 3RW4076-6BB35 | 74FS35BFAF | | 74FS35DFAF | | 74FS350FAF | | 74FS35EFAF | | | | |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



3RW44 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Multiple starting/stopping techniques including torque control
- Internal overload class 5, 10, 15, 20, or 30
- Built-in graphical LCD keypad
- Internal self protection
- Fault monitoring
- 3 parameter sets
- Communication capable via opt. Profibus module
- Programmable inputs and outputs
- External keypad available

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW44 is designed for normal starting applications.
- For factory modifications see page 7/43.
- For complete derating and application info see page 7/70.
- For dimensional drawings see page 7/95.

Class 73 non-combination starters include:

- NEMA rated enclosure
- 3RW44 Sirius softstarter with built-in OL and bypass
- Control circuit transformer
- Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 73 starters are built to UL and CSA standards.

3RW44 For High Feature Applications


Enclosed Non-Combination (Starter Only)

| Rated Operating Current | MAX HP ^① | | | | KW | Class 10 Light Duty (350% * Im for 10s) ^② | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|-----|--|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel |
| 26 | 7.5 | 7.5 | 15 | — | 12 | 3RW4422-1BC34 | 73AT3_BFA | — | 73AT3_DFA | — | 73AT3_OFA | — | 73AT3_EFA | — | 73AT3_WFA | — |
| 32 | 10 | 10 | 20 | — | 15 | 3RW4423-1BC34 | 73BT3_BFA | — | 73BT3_DFA | — | 73BT3_OFA | — | 73BT3_EFA | — | 73BT3_WFA | — |
| 42 | 10 | 15 | 25 | — | 19 | 3RW4424-1BC34 | 73CT3_BFA | — | 73CT3_DFA | — | 73CT3_OFA | — | 73CT3_EFA | — | 73CT3_WFA | — |
| 51 | 15 | 15 | 30 | — | 22 | 3RW4425-1BC34 | 73DT3_BFA | — | 73DT3_DFA | — | 73DT3_OFA | — | 73DT3_EFA | — | 73DT3_WFA | — |
| 68 | 20 | 25 | 50 | — | 37 | 3RW4426-1BC34 | 73ET3_BFA | — | 73ET3_DFA | — | 73ET3_OFA | — | 73ET3_EFA | — | 73ET3_WFA | — |
| 82 | 25 | 30 | 60 | — | 45 | 3RW4427-1BC34 | 73FT3_BFA | — | 73FT3_DFA | — | 73FT3_OFA | — | 73FT3_EFA | — | 73FT3_WFA | — |
| 100 | 30 | 30 | 75 | — | 56 | 3RW4434-6BC34 | 73GT3_BFA | — | 73GT3_DFA | — | 73GT3_OFA | — | 73GT3_EFA | — | 73GT3_WFA | — |
| 117 | 30 | 40 | 75 | — | 56 | 3RW4435-6BC34 | 73HT3_BFA | — | 73HT3_DFA | — | 73HT3_OFA | — | 73HT3_EFA | — | 73HT3_WFA | — |
| 145 | 40 | 50 | 100 | — | 75 | 3RW4436-6BC34 | 73JT3_BFA | — | 73JT3_DFA | — | 73JT3_OFA | — | 73JT3_EFA | — | 73JT3_WFA | — |
| 180 | 60 | 60 | 125 | — | 93 | 3RW4443-6BC34 | 73KT3_BFA | — | 73KT3_DFA | — | 73KT3_OFA | — | 73KT3_EFA | — | 73KT3_WFA | — |
| 215 | 60 | 75 | 150 | — | 112 | 3RW4444-6BC34 | 73LT3_BFA | — | 73LT3_DFA | — | 73LT3_OFA | — | 73LT3_EFA | — | 73LT3_WFA | — |
| 280 | 75 | 100 | 200 | — | 149 | 3RW4445-6BC34 | 73MT3_BFA | — | 73MT3_DFA | — | 73MT3_OFA | — | 73MT3_EFA | — | 73MT3_WFA | — |
| 315 | 100 | 125 | 250 | — | 186 | 3RW4446-6BC34 | 73NT3_BFA | — | 73NT3_DFA | — | 73NT3_OFA | — | 73NT3_EFA | — | 73NT3_WFA | — |
| 385 | 125 | 150 | 300 | — | 224 | 3RW4447-6BC34 | 73PT3_BFA | — | 73PT3_DFA | — | 73PT3_OFA | — | 73PT3_EFA | — | 73PT3_WFA | — |
| 494 | 150 | 200 | 400 | — | 298 | 3RW4453-6BC34 | 73QT3_BFA | — | 73QT3_DFA | — | 73QT3_OFA | — | 73QT3_EFA | — | 73QT3_WFA | — |
| 551 | 150 | 200 | 450 | — | 336 | 3RW4454-6BC34 | 73RT3_BFA | — | 73RT3_DFA | — | 73RT3_OFA | — | 73RT3_EFA | — | 73RT3_WFA | — |
| 615 | 200 | 250 | 500 | — | 373 | 3RW4455-6BC34 | 73ST3_BFA | — | 73ST3_DFA | — | 73ST3_OFA | — | 73ST3_EFA | — | 73ST3_WFA | — |
| 693 | 200 | 250 | 550 | — | 410 | 3RW4456-6BC34 | 73TT3_BFA | — | 73TT3_DFA | — | 73TT3_OFA | — | 73TT3_EFA | — | 73TT3_WFA | — |
| 780 | 200 | 250 | 600 | — | 447 | 3RW4457-6BC34 | 73WT3_BFA | — | 73WT3_DFA | — | 73WT3_OFA | — | 73WT3_EFA | — | 73WT3_WFA | — |
| 970 | 350 | 350 | 800 | — | 597 | 3RW4465-6BC34 | 73YT3_BFA | — | 73YT3_DFA | — | 73YT3_OFA | — | 73YT3_EFA | — | 73YT3_WFA | — |
| 1076 | 350 | 400 | 900 | — | 972 | 3RW4466-6BC34 | 73ZT3_BFA | — | 73ZT3_DFA | — | 73ZT3_OFA | — | 73ZT3_EFA | — | 73ZT3_WFA | — |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | |
| 26 | — | — | 15 | 20 | — | 3RW4422-1BC35 | 73AT35BFA | — | 73AT35DFA | — | 73AT350FA | — | 73AT35EFA | — | 73AT35WFA | — |
| 32 | — | — | 20 | 25 | — | 3RW4423-1BC35 | 73BT35BFA | — | 73BT35DFA | — | 73BT350FA | — | 73BT35EFA | — | 73BT35WFA | — |
| 42 | — | — | 25 | 30 | — | 3RW4424-1BC35 | 73CT35BFA | — | 73CT35DFA | — | 73CT350FA | — | 73CT35EFA | — | 73CT35WFA | — |
| 51 | — | — | 30 | 40 | — | 3RW4425-1BC35 | 73DT35BFA | — | 73DT35DFA | — | 73DT350FA | — | 73DT35EFA | — | 73DT35WFA | — |
| 68 | — | — | 50 | 50 | — | 3RW4426-1BC35 | 73ET35BFA | — | 73ET35DFA | — | 73ET350FA | — | 73ET35EFA | — | 73ET35WFA | — |
| 82 | — | — | 60 | 75 | — | 3RW4427-1BC35 | 73FT35BFA | — | 73FT35DFA | — | 73FT350FA | — | 73FT35EFA | — | 73FT35WFA | — |
| 100 | — | — | 75 | 75 | — | 3RW4434-6BC35 | 73GT35BFA | — | 73GT35DFA | — | 73GT350FA | — | 73GT35EFA | — | 73GT35WFA | — |
| 117 | — | — | 75 | 100 | — | 3RW4435-6BC35 | 73HT35BFA | — | 73HT35DFA | — | 73HT350FA | — | 73HT35EFA | — | 73HT35WFA | — |
| 145 | — | — | 100 | 125 | — | 3RW4436-6BC35 | 73JT35BFA | — | 73JT35DFA | — | 73JT350FA | — | 73JT35EFA | — | 73JT35WFA | — |
| 180 | — | — | 125 | 150 | — | 3RW4443-6BC35 | 73KT35BFA | — | 73KT35DFA | — | 73KT350FA | — | 73KT35EFA | — | 73KT35WFA | — |
| 215 | — | — | 150 | 200 | — | 3RW4444-6BC35 | 73LT35BFA | — | 73LT35DFA | — | 73LT350FA | — | 73LT35EFA | — | 73LT35WFA | — |
| 280 | — | — | 200 | 250 | — | 3RW4445-6BC35 | 73MT35BFA | — | 73MT35DFA | — | 73MT350FA | — | 73MT35EFA | — | 73MT35WFA | — |
| 315 | — | — | 250 | 300 | — | 3RW4446-6BC35 | 73NT35BFA | — | 73NT35DFA | — | 73NT350FA | — | 73NT35EFA | — | 73NT35WFA | — |
| 385 | — | — | 300 | 400 | — | 3RW4447-6BC35 | 73PT35BFA | — | 73PT35DFA | — | 73PT350FA | — | 73PT35EFA | — | 73PT35WFA | — |
| 494 | — | — | 400 | 500 | — | 3RW4453-6BC35 | 73QT35BFA | — | 73QT35DFA | — | 73QT350FA | — | 73QT35EFA | — | 73QT35WFA | — |
| 551 | — | — | 450 | 600 | — | 3RW4454-6BC35 | 73RT35BFA | — | 73RT35DFA | — | 73RT350FA | — | 73RT35EFA | — | 73RT35WFA | — |
| 615 | — | — | 500 | 700 | — | 3RW4455-6BC35 | 73ST35BFA | — | 73ST35DFA | — | 73ST350FA | — | 73ST35EFA | — | 73ST35WFA | — |
| 693 | — | — | 550 | 750 | — | 3RW4456-6BC35 | 73TT35BFA | — | 73TT35DFA | — | 73TT350FA | — | 73TT35EFA | — | 73TT35WFA | — |
| 780 | — | — | 600 | 850 | — | 3RW4457-6BC35 | 73WT35BFA | — | 73WT35DFA | — | 73WT350FA | — | 73WT35EFA | — | 73WT35WFA | — |
| 970 | — | — | 800 | 1000 | — | 3RW4465-6BC35 | 73YT35BFA | — | 73YT35DFA | — | 73YT350FA | — | 73YT35EFA | — | 73YT35WFA | — |
| 1076 | — | — | 900 | 1100 | — | 3RW4466-6BC35 | 73ZT35BFA | — | 73ZT35DFA | — | 73ZT350FA | — | 73ZT35EFA | — | 73ZT35WFA | — |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



- 3RW44 Enclosed features:
- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
 - Compact size
 - Built-in bypass contactor
 - Multiple starting/stopping techniques including torque control
 - Internal overload class 10, 15, or 20
 - Built-in graphical LCD keypad
 - Internal self protection
 - Fault monitoring
 - 3 parameter sets
 - Communication capable via opt. Profibus module
 - Programmable inputs and outputs
 - External keypad available

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW44 is designed for normal starting applications.
- For factory modifications see page 7/43.
- For complete derating and application info see page 7/70.
- For dimensional drawings see page 7/95.

Class 73 non-combination starters include:

- NEMA rated enclosure
- 3RW44 Sirius softstarter with built-in OL and bypass
- Control circuit transformer
- Line side power terminal block
- Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 73 starters are built to UL and CSA standards.

3RW44 For High Feature Applications

Enclosed Non-Combination (Starter Only)

| Rated Operating Current | MAX HP ^① | | | | KW | Class 20 Severe Duty (350% * Im for 20s) ^② | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|-----|---|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel |
| 26 | 7.5 | 7.5 | 15 | — | 12 | 3RW4422-1BC34 | 73AT3_BFA | | 73AT3_DFA | | 73AT3_OFA | | 73AT3_EFA | | 73AT3_WFA | |
| 32 | 10 | 10 | 20 | — | 15 | 3RW4423-1BC34 | 73BT3_BFA | | 73BT3_DFA | | 73BT3_OFA | | 73BT3_EFA | | 73BT3_WFA | |
| 42 | 10 | 15 | 25 | — | 19 | 3RW4424-1BC34 | 73CT3_BFA | | 73CT3_DFA | | 73CT3_OFA | | 73CT3_EFA | | 73CT3_WFA | |
| 51 | 15 | 15 | 30 | — | 22 | 3RW4425-1BC34 | 73DT3_BFA | | 73DT3_DFA | | 73DT3_OFA | | 73DT3_EFA | | 73DT3_WFA | |
| 68 | 20 | 25 | 50 | — | 37 | 3RW4426-1BC34 | 73ET3_BFA | | 73ET3_DFA | | 73ET3_OFA | | 73ET3_EFA | | 73ET3_WFA | |
| 82 | 25 | 30 | 60 | — | 45 | 3RW4427-1BC34 | 73FT3_BFA | | 73FT3_DFA | | 73FT3_OFA | | 73FT3_EFA | | 73FT3_WFA | |
| 97 | 30 | 30 | 60 | — | 45 | 3RW4434-6BC34 | 73GT3_BFA | | 73GT3_DFA | | 73GT3_OFA | | 73GT3_EFA | | 73GT3_WFA | |
| 113 | 30 | 40 | 75 | — | 56 | 3RW4435-6BC34 | 73HT3_BFA | | 73HT3_DFA | | 73HT3_OFA | | 73HT3_EFA | | 73HT3_WFA | |
| 134 | 40 | 50 | 75 | — | 56 | 3RW4436-6BC34 | 73JT3_BFA | | 73JT3_DFA | | 73JT3_OFA | | 73JT3_EFA | | 73JT3_WFA | |
| 175 | 50 | 60 | 100 | — | 75 | 3RW4443-6BC34 | 73KT3_BFA | | 73KT3_DFA | | 73KT3_OFA | | 73KT3_EFA | | 73KT3_WFA | |
| 195 | 60 | 75 | 125 | — | 93 | 3RW4444-6BC34 | 73LT3_BFA | | 73LT3_DFA | | 73LT3_OFA | | 73LT3_EFA | | 73LT3_WFA | |
| 243 | 75 | 75 | 150 | — | 112 | 3RW4445-6BC34 | 73MT3_BFA | | 73MT3_DFA | | 73MT3_OFA | | 73MT3_EFA | | 73MT3_WFA | |
| 263 | 75 | 100 | 200 | — | 149 | 3RW4446-6BC34 | 73NT3_BFA | | 73NT3_DFA | | 73NT3_OFA | | 73NT3_EFA | | 73NT3_WFA | |
| 326 | 100 | 125 | 250 | — | 186 | 3RW4447-6BC34 | 73PT3_BFA | | 73PT3_DFA | | 73PT3_OFA | | 73PT3_EFA | | 73PT3_WFA | |
| 494 | 150 | 150 | 400 | — | 224 | 3RW4453-6BC34 | 73QT3_BFA | | 73QT3_DFA | | 73QT3_OFA | | 73QT3_EFA | | 73QT3_WFA | |
| 551 | 150 | 200 | 450 | — | 298 | 3RW4454-6BC34 | 73RT3_BFA | | 73RT3_DFA | | 73RT3_OFA | | 73RT3_EFA | | 73RT3_WFA | |
| 615 | 200 | 200 | 500 | — | 336 | 3RW4455-6BC34 | 73ST3_BFA | | 73ST3_DFA | | 73ST3_OFA | | 73ST3_EFA | | 73ST3_WFA | |
| 634 | 200 | 250 | 500 | — | 373 | 3RW4456-6BC34 | 73TT3_BFA | | 73TT3_DFA | | 73TT3_OFA | | 73TT3_EFA | | 73TT3_WFA | |
| 650 | 200 | 250 | 550 | — | 410 | 3RW4457-6BC34 | 73WT3_BFA | | 73WT3_DFA | | 73WT3_OFA | | 73WT3_EFA | | 73WT3_WFA | |
| 880 | 300 | 350 | 700 | — | 522 | 3RW4465-6BC34 | 73YT3_BFA | | 73YT3_DFA | | 73YT3_OFA | | 73YT3_EFA | | 73YT3_WFA | |
| 940 | 300 | 350 | 750 | — | 559 | 3RW4466-6BC34 | 73ZT3_BFA | | 73ZT3_DFA | | 73ZT3_OFA | | 73ZT3_EFA | | 73ZT3_WFA | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | |
| 26 | — | — | 15 | 20 | — | 3RW4422-1BC35 | 73AT35BFA | | 73AT35DFA | | 73AT35OFA | | 73AT35EFA | | 73AT35WFA | |
| 32 | — | — | 20 | 25 | — | 3RW4423-1BC35 | 73BT35BFA | | 73BT35DFA | | 73BT35OFA | | 73BT35EFA | | 73BT35WFA | |
| 42 | — | — | 25 | 30 | — | 3RW4424-1BC35 | 73CT35BFA | | 73CT35DFA | | 73CT35OFA | | 73CT35EFA | | 73CT35WFA | |
| 51 | — | — | 30 | 40 | — | 3RW4425-1BC35 | 73DT35BFA | | 73DT35DFA | | 73DT35OFA | | 73DT35EFA | | 73DT35WFA | |
| 68 | — | — | 50 | 50 | — | 3RW4426-1BC35 | 73ET35BFA | | 73ET35DFA | | 73ET35OFA | | 73ET35EFA | | 73ET35WFA | |
| 82 | — | — | 60 | 75 | — | 3RW4427-1BC35 | 73FT35BFA | | 73FT35DFA | | 73FT35OFA | | 73FT35EFA | | 73FT35WFA | |
| 97 | — | — | 60 | 75 | — | 3RW4434-6BC35 | 73GT35BFA | | 73GT35DFA | | 73GT35OFA | | 73GT35EFA | | 73GT35WFA | |
| 113 | — | — | 75 | 100 | — | 3RW4435-6BC35 | 73HT35BFA | | 73HT35DFA | | 73HT35OFA | | 73HT35EFA | | 73HT35WFA | |
| 134 | — | — | 75 | 125 | — | 3RW4436-6BC35 | 73JT35BFA | | 73JT35DFA | | 73JT35OFA | | 73JT35EFA | | 73JT35WFA | |
| 175 | — | — | 100 | 150 | — | 3RW4443-6BC35 | 73KT35BFA | | 73KT35DFA | | 73KT35OFA | | 73KT35EFA | | 73KT35WFA | |
| 195 | — | — | 125 | 200 | — | 3RW4444-6BC35 | 73LT35BFA | | 73LT35DFA | | 73LT35OFA | | 73LT35EFA | | 73LT35WFA | |
| 243 | — | — | 150 | 200 | — | 3RW4445-6BC35 | 73MT35BFA | | 73MT35DFA | | 73MT35OFA | | 73MT35EFA | | 73MT35WFA | |
| 263 | — | — | 200 | 250 | — | 3RW4446-6BC35 | 73NT35BFA | | 73NT35DFA | | 73NT35OFA | | 73NT35EFA | | 73NT35WFA | |
| 326 | — | — | 250 | 300 | — | 3RW4447-6BC35 | 73PT35BFA | | 73PT35DFA | | 73PT35OFA | | 73PT35EFA | | 73PT35WFA | |
| 494 | — | — | 400 | 500 | — | 3RW4453-6BC35 | 73QT35BFA | | 73QT35DFA | | 73QT35OFA | | 73QT35EFA | | 73QT35WFA | |
| 551 | — | — | 450 | 550 | — | 3RW4454-6BC35 | 73RT35BFA | | 73RT35DFA | | 73RT35OFA | | 73RT35EFA | | 73RT35WFA | |
| 615 | — | — | 500 | 600 | — | 3RW4455-6BC35 | 73ST35BFA | | 73ST35DFA | | 73ST35OFA | | 73ST35EFA | | 73ST35WFA | |
| 693 | — | — | 500 | 650 | — | 3RW4456-6BC35 | 73TT35BFA | | 73TT35DFA | | 73TT35OFA | | 73TT35EFA | | 73TT35WFA | |
| 780 | — | — | 550 | 700 | — | 3RW4457-6BC35 | 73WT35BFA | | 73WT35DFA | | 73WT35OFA | | 73WT35EFA | | 73WT35WFA | |
| 880 | — | — | 700 | 850 | — | 3RW4465-6BC35 | 73YT35BFA | | 73YT35DFA | | 73YT35OFA | | 73YT35EFA | | 73YT35WFA | |
| 940 | — | — | 750 | 900 | — | 3RW4466-6BC35 | 73ZT35BFA | | 73ZT35DFA | | 73ZT35OFA | | 73ZT35EFA | | 73ZT35WFA | |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



3RW44 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Multiple starting/stopping techniques including torque control
- Internal overload class 5, 10, 15, 20, or 30
- Built-in graphical LCD keypad
- Internal self protection
- Fault monitoring
- 3 parameter sets
- Communication capable via opt. Profibus module
- Programmable inputs and outputs
- External keypad available

Ordering Information

- ▶ Enclosed devices should be ordered by the FLA of the motor.
- ▶ The 3RW44 is designed for normal starting applications.
- ▶ For factory modifications see page 7/43.
- ▶ For complete derating and application info see page 7/70.
- ▶ For dimensional drawings see page 7/95.
- ▶ For stocked versions see page 7/89.

Class 74 non-combination starters include:

- NEMA rated enclosure
- 3RW44 Sirius softstarter with built-in OL and bypass
- Circuit breaker with disconnect
- Control circuit transformer
- Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 74 starters are built to UL and CSA standards.

3RW44 For High Feature Applications

Enclosed Combination with Circuit Breaker Disconnect

| Rated Operating Current | MAX HP ^① | | | | KW | Class 10 Light Duty (350% * Im for 10s) ^② | | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|-----|--|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|---------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel | List Price \$ |
| 26 | 7.5 | 7.5 | 15 | — | 12 | 3RW4422-1BC34 | 74AT3_BFAP | | 74AT3_DFAP | | 74AT3_OFAP | | 74AT3_EFAP | | 74AT3_WFAP | | |
| 32 | 10 | 10 | 20 | — | 15 | 3RW4423-1BC34 | 74BT3_BFAP | | 74BT3_DFAP | | 74BT3_OFAP | | 74BT3_EFAP | | 74BT3_WFAP | | |
| 42 | 10 | 15 | 25 | — | 19 | 3RW4424-1BC34 | 74CT3_BFAP | | 74CT3_DFAP | | 74CT3_OFAP | | 74CT3_EFAP | | 74CT3_WFAP | | |
| 51 | 15 | 15 | 30 | — | 22 | 3RW4425-1BC34 | 74DT3_BFAP | | 74DT3_DFAP | | 74DT3_OFAP | | 74DT3_EFAP | | 74DT3_WFAP | | |
| 68 | 20 | 25 | 50 | — | 37 | 3RW4426-1BC34 | 74ET3_BFAP | | 74ET3_DFAP | | 74ET3_OFAP | | 74ET3_EFAP | | 74ET3_WFAP | | |
| 82 | 25 | 30 | 60 | — | 45 | 3RW4427-1BC34 | 74FT3_BFAP | | 74FT3_DFAP | | 74FT3_OFAP | | 74FT3_EFAP | | 74FT3_WFAP | | |
| 100 | 30 | 30 | 75 | — | 56 | 3RW4434-6BC34 | 74GT3_BFAP | | 74GT3_DFAP | | 74GT3_OFAP | | 74GT3_EFAP | | 74GT3_WFAP | | |
| 117 | 30 | 40 | 75 | — | 56 | 3RW4435-6BC34 | 74HT3_BFAP | | 74HT3_DFAP | | 74HT3_OFAP | | 74HT3_EFAP | | 74HT3_WFAP | | |
| 145 | 40 | 50 | 100 | — | 75 | 3RW4436-6BC34 | 74JT3_BFAP | | 74JT3_DFAP | | 74JT3_OFAP | | 74JT3_EFAP | | 74JT3_WFAP | | |
| 180 | 60 | 60 | 125 | — | 93 | 3RW4443-6BC34 | 74KT3_BFAP | | 74KT3_DFAP | | 74KT3_OFAP | | 74KT3_EFAP | | 74KT3_WFAP | | |
| 215 | 60 | 75 | 150 | — | 112 | 3RW4444-6BC34 | 74LT3_BFAP | | 74LT3_DFAP | | 74LT3_OFAP | | 74LT3_EFAP | | 74LT3_WFAP | | |
| 280 | 75 | 100 | 200 | — | 149 | 3RW4445-6BC34 | 74MT3_BFAP | | 74MT3_DFAP | | 74MT3_OFAP | | 74MT3_EFAP | | 74MT3_WFAP | | |
| 315 | 100 | 125 | 250 | — | 186 | 3RW4446-6BC34 | 74NT3_BFAP | | 74NT3_DFAP | | 74NT3_OFAP | | 74NT3_EFAP | | 74NT3_WFAP | | |
| 385 | 125 | 150 | 300 | — | 224 | 3RW4447-6BC34 | 74PT3_BFAP | | 74PT3_DFAP | | 74PT3_OFAP | | 74PT3_EFAP | | 74PT3_WFAP | | |
| 494 | 150 | 200 | 400 | — | 298 | 3RW4453-6BC34 | 74QT3_BFAT | | 74QT3_DFAT | | 74QT3_OFAT | | 74QT3_EFAT | | 74QT3_WFAT | | |
| 551 | 150 | 200 | 450 | — | 336 | 3RW4454-6BC34 | 74RT3_BFAT | | 74RT3_DFAT | | 74RT3_OFAT | | 74RT3_EFAT | | 74RT3_WFAT | | |
| 615 | 200 | 250 | 500 | — | 373 | 3RW4455-6BC34 | 74ST3_BFAT | | 74ST3_DFAT | | 74ST3_OFAT | | 74ST3_EFAT | | 74ST3_WFAT | | |
| 693 | 200 | 250 | 550 | — | 410 | 3RW4456-6BC34 | 74TT3_BFAT | | 74TT3_DFAT | | 74TT3_OFAT | | 74TT3_EFAT | | 74TT3_WFAT | | |
| 780 | 200 | 250 | 600 | — | 447 | 3RW4457-6BC34 | 74WT3_BFAT | | 74WT3_DFAT | | 74WT3_OFAT | | 74WT3_EFAT | | 74WT3_WFAT | | |
| 970 | 350 | 350 | 800 | — | 597 | 3RW4465-6BC34 | 74YT3_BFAT | | 74YT3_DFAT | | 74YT3_OFAT | | 74YT3_EFAT | | 74YT3_WFAT | | |
| 1076 | 350 | 400 | 900 | — | 672 | 3RW4466-6BC34 | 74ZT3_BFAT | | 74ZT3_DFAT | | 74ZT3_OFAT | | 74ZT3_EFAT | | 74ZT3_WFAT | | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | | |
| 26 | — | — | 15 | 20 | — | 3RW4422-1BC35 | 74AT35BFAP | | 74AT35DFAP | | 74AT35OFAP | | 74AT35EFAP | | 74AT35WFAP | | |
| 32 | — | — | 20 | 25 | — | 3RW4423-1BC35 | 74BT35BFAP | | 74BT35DFAP | | 74BT35OFAP | | 74BT35EFAP | | 74BT35WFAP | | |
| 42 | — | — | 25 | 30 | — | 3RW4424-1BC35 | 74CT35BFAP | | 74CT35DFAP | | 74CT35OFAP | | 74CT35EFAP | | 74CT35WFAP | | |
| 51 | — | — | 30 | 40 | — | 3RW4425-1BC35 | 74DT35BFAP | | 74DT35DFAP | | 74DT35OFAP | | 74DT35EFAP | | 74DT35WFAP | | |
| 68 | — | — | 50 | 50 | — | 3RW4426-1BC35 | 74ET35BFAP | | 74ET35DFAP | | 74ET35OFAP | | 74ET35EFAP | | 74ET35WFAP | | |
| 82 | — | — | 60 | 75 | — | 3RW4427-1BC35 | 74FT35BFAP | | 74FT35DFAP | | 74FT35OFAP | | 74FT35EFAP | | 74FT35WFAP | | |
| 100 | — | — | 75 | 75 | — | 3RW4434-6BC35 | 74GT35BFAP | | 74GT35DFAP | | 74GT35OFAP | | 74GT35EFAP | | 74GT35WFAP | | |
| 117 | — | — | 75 | 100 | — | 3RW4435-6BC35 | 74HT35BFAP | | 74HT35DFAP | | 74HT35OFAP | | 74HT35EFAP | | 74HT35WFAP | | |
| 145 | — | — | 100 | 125 | — | 3RW4436-6BC35 | 74JT35BFAP | | 74JT35DFAP | | 74JT35OFAP | | 74JT35EFAP | | 74JT35WFAP | | |
| 180 | — | — | 125 | 150 | — | 3RW4443-6BC35 | 74KT35BFAP | | 74KT35DFAP | | 74KT35OFAP | | 74KT35EFAP | | 74KT35WFAP | | |
| 215 | — | — | 150 | 200 | — | 3RW4444-6BC35 | 74LT35BFAP | | 74LT35DFAP | | 74LT35OFAP | | 74LT35EFAP | | 74LT35WFAP | | |
| 280 | — | — | 200 | 250 | — | 3RW4445-6BC35 | 74MT35BFAP | | 74MT35DFAP | | 74MT35OFAP | | 74MT35EFAP | | 74MT35WFAP | | |
| 315 | — | — | 250 | 300 | — | 3RW4446-6BC35 | 74NT35BFAP | | 74NT35DFAP | | 74NT35OFAP | | 74NT35EFAP | | 74NT35WFAP | | |
| 385 | — | — | 300 | 400 | — | 3RW4447-6BC35 | 74PT35BFAP | | 74PT35DFAP | | 74PT35OFAP | | 74PT35EFAP | | 74PT35WFAP | | |
| 494 | — | — | 400 | 500 | — | 3RW4453-6BC35 | 74QT35BFAT | | 74QT35DFAT | | 74QT35OFAT | | 74QT35EFAT | | 74QT35WFAT | | |
| 551 | — | — | 450 | 600 | — | 3RW4454-6BC35 | 74RT35BFAT | | 74RT35DFAT | | 74RT35OFAT | | 74RT35EFAT | | 74RT35WFAT | | |
| 615 | — | — | 500 | 700 | — | 3RW4455-6BC35 | 74ST35BFAT | | 74ST35DFAT | | 74ST35OFAT | | 74ST35EFAT | | 74ST35WFAT | | |
| 693 | — | — | 550 | 750 | — | 3RW4456-6BC35 | 74TT35BFAT | | 74TT35DFAT | | 74TT35OFAT | | 74TT35EFAT | | 74TT35WFAT | | |
| 780 | — | — | 600 | 850 | — | 3RW4457-6BC35 | 74WT35BFAT | | 74WT35DFAT | | 74WT35OFAT | | 74WT35EFAT | | 74WT35WFAT | | |
| 970 | — | — | 800 | 1000 | — | 3RW4465-6BC35 | 74YT35BFAT | | 74YT35DFAT | | 74YT35OFAT | | 74YT35EFAT | | 74YT35WFAT | | |
| 1076 | — | — | 900 | 1100 | — | 3RW4466-6BC35 | 74ZT35BFAT | | 74ZT35DFAT | | 74ZT35OFAT | | 74ZT35EFAT | | 74ZT35WFAT | | |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



3RW44 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Multiple starting/stopping techniques including torque control
- Internal overload class 5, 10, 15, 20, or 30
- Built-in graphical LCD keypad
- Internal self protection
- Fault monitoring
- 3 parameter sets
- Communication capable via opt. Profibus module
- Programmable inputs and outputs
- External keypad available

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW44 is designed for normal starting applications.
- For factory modifications see page 7/43.
- For complete derating and application info see page 7/70.
- For dimensional drawings see page 7/95.
- For stocked versions see page 7/89.

Class 74 non-combination starters include:

- NEMA rated enclosure
- 3RW44 Sirius softstarter with built-in OL and bypass
- Circuit breaker with disconnect
- Control circuit transformer
- Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 74 starters are built to UL and CSA standards.

3RW44 For High Feature Applications

Enclosed Combination with Circuit Breaker Disconnect

| Rated Operating Current | MAX HP ^① | | | | KW | Class 20 Severe Duty (350% * Im for 20s) ^② | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|-----|---|---------------------------|------------|---------------|------------|---------------|---------|---------------|--------|---------------|---------------------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel |
| 26 | 7.5 | 7.5 | 15 | — | 12 | 3RW4422-1BC34 | 74AT3_BFAP | 74AT3_DFAP | 74AT3_OFAP | 74AT3_EFAP | 74AT3_WFAP | | | | | |
| 32 | 10 | 10 | 20 | — | 15 | 3RW4423-1BC34 | 74BT3_BFAP | 74BT3_DFAP | 74BT3_OFAP | 74BT3_EFAP | 74BT3_WFAP | | | | | |
| 42 | 10 | 15 | 25 | — | 19 | 3RW4424-1BC34 | 74CT3_BFAP | 74CT3_DFAP | 74CT3_OFAP | 74CT3_EFAP | 74CT3_WFAP | | | | | |
| 51 | 15 | 15 | 30 | — | 22 | 3RW4425-1BC34 | 74DT3_BFAP | 74DT3_DFAP | 74DT3_OFAP | 74DT3_EFAP | 74DT3_WFAP | | | | | |
| 68 | 20 | 25 | 50 | — | 37 | 3RW4426-1BC34 | 74ET3_BFAP | 74ET3_DFAP | 74ET3_OFAP | 74ET3_EFAP | 74ET3_WFAP | | | | | |
| 82 | 25 | 30 | 60 | — | 45 | 3RW4427-1BC34 | 74FT3_BFAP | 74FT3_DFAP | 74FT3_OFAP | 74FT3_EFAP | 74FT3_WFAP | | | | | |
| 97 | 30 | 30 | 60 | — | 45 | 3RW4434-6BC34 | 74GT3_BFAP | 74GT3_DFAP | 74GT3_OFAP | 74GT3_EFAP | 74GT3_WFAP | | | | | |
| 113 | 30 | 40 | 75 | — | 56 | 3RW4435-6BC34 | 74HT3_BFAP | 74HT3_DFAP | 74HT3_OFAP | 74HT3_EFAP | 74HT3_WFAP | | | | | |
| 134 | 40 | 50 | 75 | — | 56 | 3RW4436-6BC34 | 74JT3_BFAP | 74JT3_DFAP | 74JT3_OFAP | 74JT3_EFAP | 74JT3_WFAP | | | | | |
| 175 | 50 | 60 | 100 | — | 75 | 3RW4443-6BC34 | 74KT3_BFAP | 74KT3_DFAP | 74KT3_OFAP | 74KT3_EFAP | 74KT3_WFAP | | | | | |
| 195 | 60 | 75 | 125 | — | 93 | 3RW4444-6BC34 | 74LT3_BFAP | 74LT3_DFAP | 74LT3_OFAP | 74LT3_EFAP | 74LT3_WFAP | | | | | |
| 243 | 75 | 75 | 150 | — | 112 | 3RW4445-6BC34 | 74MT3_BFAP | 74MT3_DFAP | 74MT3_OFAP | 74MT3_EFAP | 74MT3_WFAP | | | | | |
| 263 | 75 | 100 | 200 | — | 149 | 3RW4446-6BC34 | 74NT3_BFAP | 74NT3_DFAP | 74NT3_OFAP | 74NT3_EFAP | 74NT3_WFAP | | | | | |
| 326 | 100 | 125 | 250 | — | 186 | 3RW4447-6BC34 | 74PT3_BFAP | 74PT3_DFAP | 74PT3_OFAP | 74PT3_EFAP | 74PT3_WFAP | | | | | |
| 494 | 150 | 150 | 400 | — | 224 | 3RW4453-6BC34 | 74QT3_BFAT | 74QT3_DFAT | 74QT3_OFAT | 74QT3_EFAT | 74QT3_WFAT | | | | | |
| 551 | 150 | 200 | 450 | — | 298 | 3RW4454-6BC34 | 74RT3_BFAT | 74RT3_DFAT | 74RT3_OFAT | 74RT3_EFAT | 74RT3_WFAT | | | | | |
| 615 | 200 | 200 | 500 | — | 336 | 3RW4455-6BC34 | 74ST3_BFAT | 74ST3_DFAT | 74ST3_OFAT | 74ST3_EFAT | 74ST3_WFAT | | | | | |
| 634 | 200 | 250 | 500 | — | 373 | 3RW4456-6BC34 | 74TT3_BFAT | 74TT3_DFAT | 74TT3_OFAT | 74TT3_EFAT | 74TT3_WFAT | | | | | |
| 650 | 200 | 250 | 550 | — | 410 | 3RW4457-6BC34 | 74WT3_BFAT | 74WT3_DFAT | 74WT3_OFAT | 74WT3_EFAT | 74WT3_WFAT | | | | | |
| 880 | 300 | 350 | 700 | — | 522 | 3RW4465-6BC34 | 74YT3_BFAT | 74YT3_DFAT | 74YT3_OFAT | 74YT3_EFAT | 74YT3_WFAT | | | | | |
| 940 | 300 | 350 | 750 | — | 559 | 3RW4466-6BC34 | 74ZT3_BFAT | 74ZT3_DFAT | 74ZT3_OFAT | 74ZT3_EFAT | 74ZT3_WFAT | | | | | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | |
| 26 | — | — | 15 | 20 | — | 3RW4422-1BC35 | 74AT35BFAP | 74AT35DFAP | 74AT35OFAP | 74AT35EFAP | 74AT35WFAP | | | | | |
| 32 | — | — | 20 | 25 | — | 3RW4423-1BC35 | 74BT35BFAP | 74BT35DFAP | 74BT35OFAP | 74BT35EFAP | 74BT35WFAP | | | | | |
| 42 | — | — | 25 | 30 | — | 3RW4424-1BC35 | 74CT35BFAP | 74CT35DFAP | 74CT35OFAP | 74CT35EFAP | 74CT35WFAP | | | | | |
| 51 | — | — | 30 | 40 | — | 3RW4425-1BC35 | 74DT35BFAP | 74DT35DFAP | 74DT35OFAP | 74DT35EFAP | 74DT35WFAP | | | | | |
| 68 | — | — | 50 | 50 | — | 3RW4426-1BC35 | 74ET35BFAP | 74ET35DFAP | 74ET35OFAP | 74ET35EFAP | 74ET35WFAP | | | | | |
| 82 | — | — | 60 | 75 | — | 3RW4427-1BC35 | 74FT35BFAP | 74FT35DFAP | 74FT35OFAP | 74FT35EFAP | 74FT35WFAP | | | | | |
| 97 | — | — | 60 | 75 | — | 3RW4434-6BC35 | 74GT35BFAP | 74GT35DFAP | 74GT35OFAP | 74GT35EFAP | 74GT35WFAP | | | | | |
| 113 | — | — | 75 | 100 | — | 3RW4435-6BC35 | 74HT35BFAP | 74HT35DFAP | 74HT35OFAP | 74HT35EFAP | 74HT35WFAP | | | | | |
| 134 | — | — | 75 | 125 | — | 3RW4436-6BC35 | 74JT35BFAP | 74JT35DFAP | 74JT35OFAP | 74JT35EFAP | 74JT35WFAP | | | | | |
| 175 | — | — | 100 | 150 | — | 3RW4443-6BC35 | 74KT35BFAP | 74KT35DFAP | 74KT35OFAP | 74KT35EFAP | 74KT35WFAP | | | | | |
| 195 | — | — | 125 | 200 | — | 3RW4444-6BC35 | 74LT35BFAP | 74LT35DFAP | 74LT35OFAP | 74LT35EFAP | 74LT35WFAP | | | | | |
| 243 | — | — | 150 | 200 | — | 3RW4445-6BC35 | 74MT35BFAP | 74MT35DFAP | 74MT35OFAP | 74MT35EFAP | 74MT35WFAP | | | | | |
| 263 | — | — | 200 | 250 | — | 3RW4446-6BC35 | 74NT35BFAP | 74NT35DFAP | 74NT35OFAP | 74NT35EFAP | 74NT35WFAP | | | | | |
| 326 | — | — | 250 | 300 | — | 3RW4447-6BC35 | 74PT35BFAP | 74PT35DFAP | 74PT35OFAP | 74PT35EFAP | 74PT35WFAP | | | | | |
| 494 | — | — | 400 | 500 | — | 3RW4453-6BC35 | 74QT35BFAT | 74QT35DFAT | 74QT35OFAT | 74QT35EFAT | 74QT35WFAT | | | | | |
| 551 | — | — | 450 | 550 | — | 3RW4454-6BC35 | 74RT35BFAT | 74RT35DFAT | 74RT35OFAT | 74RT35EFAT | 74RT35WFAT | | | | | |
| 615 | — | — | 500 | 600 | — | 3RW4455-6BC35 | 74ST35BFAT | 74ST35DFAT | 74ST35OFAT | 74ST35EFAT | 74ST35WFAT | | | | | |
| 693 | — | — | 500 | 650 | — | 3RW4456-6BC35 | 74TT35BFAT | 74TT35DFAT | 74TT35OFAT | 74TT35EFAT | 74TT35WFAT | | | | | |
| 780 | — | — | 550 | 700 | — | 3RW4457-6BC35 | 74WT35BFAT | 74WT35DFAT | 74WT35OFAT | 74WT35EFAT | 74WT35WFAT | | | | | |
| 880 | — | — | 700 | 850 | — | 3RW4465-6BC35 | 74YT35BFAT | 74YT35DFAT | 74YT35OFAT | 74YT35EFAT | 74YT35WFAT | | | | | |
| 940 | — | — | 750 | 900 | — | 3RW4466-6BC35 | 74ZT35BFAT | 74ZT35DFAT | 74ZT35OFAT | 74ZT35EFAT | 74ZT35WFAT | | | | | |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor.

HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



3RW44 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Multiple starting/stopping techniques including torque control
- Internal overload class 5, 10, 15, 20, or 30
- Built-in graphical LCD keypad
- Internal self protection
- Fault monitoring
- 3 parameter sets
- Communication capable via opt. Profibus module
- Programmable inputs and outputs
- External keypad available

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW44 is designed for normal starting applications.
- For factory modifications see page 7/43.
- For complete derating and application info see page 7/70.
- For dimensional drawings see page 7/95.

Class 74 non-combination starters include:

- NEMA rated enclosure
- 3RW44 Sirius softstarter with built-in OL and bypass
- Fusible disconnect
- Control circuit transformer
- Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 74 starters are built to UL and CSA standards.

For all technical information, please consult the 2006 Industrial Controls Catalog or contact your local sales support center.

3RW44 For High Feature Applications

Enclosed Combination with Fusible Disconnect

| Rated Operating Current | MAX HP ^① | | | | KW | Class 10 Light Duty ^② (350% * Im for 10s) | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|-----|--|---------------------------|--------|---------------|---------|---------------|---------|---------------|--------|---------------|---------------------------|
| | 200V | 230V | 460V | 575V | | 380V | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel |
| 26 | 7.5 | 7.5 | 15 | — | 12 | 3RW4422-1BC34 | 74AT3_BFAF | | 74AT3_DFAF | | 74AT3_OFAF | | 74AT3_EFAF | | 74AT3_WFAF | |
| 32 | 10 | 10 | 20 | — | 15 | 3RW4423-1BC34 | 74BT3_BFAF | | 74BT3_DFAF | | 74BT3_OFAF | | 74BT3_EFAF | | 74BT3_WFAF | |
| 42 | 10 | 15 | 25 | — | 19 | 3RW4424-1BC34 | 74CT3_BFAF | | 74CT3_DFAF | | 74CT3_OFAF | | 74CT3_EFAF | | 74CT3_WFAF | |
| 51 | 15 | 15 | 30 | — | 22 | 3RW4425-1BC34 | 74DT3_BFAF | | 74DT3_DFAF | | 74DT3_OFAF | | 74DT3_EFAF | | 74DT3_WFAF | |
| 68 | 20 | 25 | 50 | — | 37 | 3RW4426-1BC34 | 74ET3_BFAF | | 74ET3_DFAF | | 74ET3_OFAF | | 74ET3_EFAF | | 74ET3_WFAF | |
| 82 | 25 | 30 | 60 | — | 45 | 3RW4427-1BC34 | 74FT3_BFAF | | 74FT3_DFAF | | 74FT3_OFAF | | 74FT3_EFAF | | 74FT3_WFAF | |
| 100 | 30 | 30 | 75 | — | 56 | 3RW4434-6BC34 | 74GT3_BFAF | | 74GT3_DFAF | | 74GT3_OFAF | | 74GT3_EFAF | | 74GT3_WFAF | |
| 117 | 30 | 40 | 75 | — | 56 | 3RW4435-6BC34 | 74HT3_BFAF | | 74HT3_DFAF | | 74HT3_OFAF | | 74HT3_EFAF | | 74HT3_WFAF | |
| 145 | 40 | 50 | 100 | — | 75 | 3RW4436-6BC34 | 74JT3_BFAF | | 74JT3_DFAF | | 74JT3_OFAF | | 74JT3_EFAF | | 74JT3_WFAF | |
| 180 | 60 | 60 | 125 | — | 93 | 3RW4443-6BC34 | 74KT3_BFAF | | 74KT3_DFAF | | 74KT3_OFAF | | 74KT3_EFAF | | 74KT3_WFAF | |
| 215 | 60 | 75 | 150 | — | 112 | 3RW4444-6BC34 | 74LT3_BFAF | | 74LT3_DFAF | | 74LT3_OFAF | | 74LT3_EFAF | | 74LT3_WFAF | |
| 280 | 75 | 100 | 200 | — | 149 | 3RW4445-6BC34 | 74MT3_BFAF | | 74MT3_DFAF | | 74MT3_OFAF | | 74MT3_EFAF | | 74MT3_WFAF | |
| 315 | 100 | 125 | 250 | — | 186 | 3RW4446-6BC34 | 74NT3_BFAF | | 74NT3_DFAF | | 74NT3_OFAF | | 74NT3_EFAF | | 74NT3_WFAF | |
| 385 | 125 | 150 | 300 | — | 224 | 3RW4447-6BC34 | 74PT3_BFAF | | 74PT3_DFAF | | 74PT3_OFAF | | 74PT3_EFAF | | 74PT3_WFAF | |
| 494 | 150 | 200 | 400 | — | 298 | 3RW4453-6BC34 | 74QT3_BFAF | | 74QT3_DFAF | | 74QT3_OFAF | | 74QT3_EFAF | | 74QT3_WFAF | |
| 551 | 150 | 200 | 450 | — | 336 | 3RW4454-6BC34 | 74RT3_BFAF | | 74RT3_DFAF | | 74RT3_OFAF | | 74RT3_EFAF | | 74RT3_WFAF | |
| 615 | 200 | 250 | 500 | — | 373 | 3RW4455-6BC34 | 74ST3_BFAF | | 74ST3_DFAF | | 74ST3_OFAF | | 74ST3_EFAF | | 74ST3_WFAF | |
| 693 | 200 | 250 | 550 | — | 447 | 3RW4456-6BC34 | 74TT3_BFAF | | 74TT3_DFAF | | 74TT3_OFAF | | 74TT3_EFAF | | 74TT3_WFAF | |
| 780 | 200 | 250 | 600 | — | 447 | 3RW4457-6BC34 | 74WT3_BFAF | | 74WT3_DFAF | | 74WT3_OFAF | | 74WT3_EFAF | | 74WT3_WFAF | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | |
| 26 | — | — | 15 | 20 | — | 3RW4422-1BC35 | 74AT35BFAF | | 74AT35DFAF | | 74AT35OFAF | | 74AT35EFAF | | 74AT35WFAF | |
| 32 | — | — | 20 | 25 | — | 3RW4423-1BC35 | 74BT35BFAF | | 74BT35DFAF | | 74BT35OFAF | | 74BT35EFAF | | 74BT35WFAF | |
| 42 | — | — | 25 | 30 | — | 3RW4424-1BC35 | 74CT35BFAF | | 74CT35DFAF | | 74CT35OFAF | | 74CT35EFAF | | 74CT35WFAF | |
| 51 | — | — | 30 | 40 | — | 3RW4425-1BC35 | 74DT35BFAF | | 74DT35DFAF | | 74DT35OFAF | | 74DT35EFAF | | 74DT35WFAF | |
| 68 | — | — | 50 | 50 | — | 3RW4426-1BC35 | 74ET35BFAF | | 74ET35DFAF | | 74ET35OFAF | | 74ET35EFAF | | 74ET35WFAF | |
| 82 | — | — | 60 | 75 | — | 3RW4427-1BC35 | 74FT35BFAF | | 74FT35DFAF | | 74FT35OFAF | | 74FT35EFAF | | 74FT35WFAF | |
| 100 | — | — | 75 | 75 | — | 3RW4434-6BC35 | 74GT35BFAF | | 74GT35DFAF | | 74GT35OFAF | | 74GT35EFAF | | 74GT35WFAF | |
| 117 | — | — | 75 | 100 | — | 3RW4435-6BC35 | 74HT35BFAF | | 74HT35DFAF | | 74HT35OFAF | | 74HT35EFAF | | 74HT35WFAF | |
| 145 | — | — | 100 | 125 | — | 3RW4436-6BC35 | 74JT35BFAF | | 74JT35DFAF | | 74JT35OFAF | | 74JT35EFAF | | 74JT35WFAF | |
| 180 | — | — | 125 | 150 | — | 3RW4443-6BC35 | 74KT35BFAF | | 74KT35DFAF | | 74KT35OFAF | | 74KT35EFAF | | 74KT35WFAF | |
| 215 | — | — | 150 | 200 | — | 3RW4444-6BC35 | 74LT35BFAF | | 74LT35DFAF | | 74LT35OFAF | | 74LT35EFAF | | 74LT35WFAF | |
| 280 | — | — | 200 | 250 | — | 3RW4445-6BC35 | 74MT35BFAF | | 74MT35DFAF | | 74MT35OFAF | | 74MT35EFAF | | 74MT35WFAF | |
| 315 | — | — | 250 | 300 | — | 3RW4446-6BC35 | 74NT35BFAF | | 74NT35DFAF | | 74NT35OFAF | | 74NT35EFAF | | 74NT35WFAF | |
| 385 | — | — | 300 | 400 | — | 3RW4447-6BC35 | 74PT35BFAF | | 74PT35DFAF | | 74PT35OFAF | | 74PT35EFAF | | 74PT35WFAF | |
| 494 | — | — | 400 | 500 | — | 3RW4453-6BC35 | 74QT35BFAF | | 74QT35DFAF | | 74QT35OFAF | | 74QT35EFAF | | 74QT35WFAF | |
| 551 | — | — | 450 | 600 | — | 3RW4454-6BC35 | 74RT35BFAF | | 74RT35DFAF | | 74RT35OFAF | | 74RT35EFAF | | 74RT35WFAF | |
| 615 | — | — | 500 | 700 | — | 3RW4455-6BC35 | 74ST35BFAF | | 74ST35DFAF | | 74ST35OFAF | | 74ST35EFAF | | 74ST35WFAF | |
| 693 | — | — | 550 | 750 | — | 3RW4456-6BC35 | 74TT35BFAF | | 74TT35DFAF | | 74TT35OFAF | | 74TT35EFAF | | 74TT35WFAF | |
| 780 | — | — | 600 | 850 | — | 3RW4457-6BC35 | 74WT35BFAF | | 74WT35DFAF | | 74WT35OFAF | | 74WT35EFAF | | 74WT35WFAF | |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



3RW44 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Multiple starting/stopping techniques including torque control
- Internal overload class 5, 10, 15, 20, or 30
- Built-in graphical LCD keypad
- Internal self protection
- Fault monitoring
- 3 parameter sets
- Communication capable via opt. Profibus module
- Programmable inputs and outputs
- External keypad available

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW44 is designed for normal starting applications.
- For factory modifications see page 7/43.
- For complete derating and application info see page 7/70.
- For dimensional drawings see page 7/95.

Class 74 non-combination starters include:

- NEMA rated enclosure
- 3RW44 Sirius softstarter with built-in OL and bypass
- Fusible disconnect
- Control circuit transformer
- Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 74 starters are built to UL and CSA standards.

For all technical information, please consult the 2006 Industrial Controls Catalog or contact your local sales support center.

3RW44 For High Feature Applications
Enclosed Combination with Fusible Disconnect

| Rated Operating Current | MAX HP ^① | | | | KW 380V | Class 20 Severe Duty (350% * Im for 20s) ^② | | | | | | | | | | |
|-------------------------|---------------------|------|------|------|------------|---|------------|---------------|------------|---------------|------------|---------------|--------|---------------|---------------------------|---------------|
| | 200V | 230V | 460V | 575V | | OPEN Style (Starter Only) | NEMA 1 | List Price \$ | NEMA 3R | List Price \$ | NEMA 12 | List Price \$ | NEMA 4 | List Price \$ | NEMA 4/4X Stainless Steel | List Price \$ |
| 26 | 7.5 | 7.5 | 15 | — | 12 | 3RW4422-1BC34 | 74AT3_BFAF | 74AT3_DFAF | 74AT3_OFAF | 74AT3_EFAF | 74AT3_WFAF | | | | | |
| 32 | 10 | 10 | 20 | — | 15 | 3RW4423-1BC34 | 74BT3_BFAF | 74BT3_DFAF | 74BT3_OFAF | 74BT3_EFAF | 74BT3_WFAF | | | | | |
| 42 | 10 | 15 | 25 | — | 19 | 3RW4424-1BC34 | 74CT3_BFAF | 74CT3_DFAF | 74CT3_OFAF | 74CT3_EFAF | 74CT3_WFAF | | | | | |
| 51 | 15 | 15 | 30 | — | 22 | 3RW4425-1BC34 | 74DT3_BFAF | 74DT3_DFAF | 74DT3_OFAF | 74DT3_EFAF | 74DT3_WFAF | | | | | |
| 68 | 20 | 25 | 50 | — | 37 | 3RW4426-1BC34 | 74ET3_BFAF | 74ET3_DFAF | 74ET3_OFAF | 74ET3_EFAF | 74ET3_WFAF | | | | | |
| 82 | 25 | 30 | 60 | — | 45 | 3RW4427-1BC34 | 74FT3_BFAF | 74FT3_DFAF | 74FT3_OFAF | 74FT3_EFAF | 74FT3_WFAF | | | | | |
| 97 | 30 | 30 | 60 | — | 45 | 3RW4434-6BC34 | 74GT3_BFAF | 74GT3_DFAF | 74GT3_OFAF | 74GT3_EFAF | 74GT3_WFAF | | | | | |
| 113 | 30 | 40 | 75 | — | 56 | 3RW4435-6BC34 | 74HT3_BFAF | 74HT3_DFAF | 74HT3_OFAF | 74HT3_EFAF | 74HT3_WFAF | | | | | |
| 134 | 40 | 50 | 75 | — | 56 | 3RW4436-6BC34 | 74JT3_BFAF | 74JT3_DFAF | 74JT3_OFAF | 74JT3_EFAF | 74JT3_WFAF | | | | | |
| 175 | 50 | 60 | 100 | — | 75 | 3RW4443-6BC34 | 74KT3_BFAF | 74KT3_DFAF | 74KT3_OFAF | 74KT3_EFAF | 74KT3_WFAF | | | | | |
| 195 | 60 | 75 | 125 | — | 93 | 3RW4444-6BC34 | 74LT3_BFAF | 74LT3_DFAF | 74LT3_OFAF | 74LT3_EFAF | 74LT3_WFAF | | | | | |
| 243 | 75 | 75 | 150 | — | 112 | 3RW4445-6BC34 | 74MT3_BFAF | 74MT3_DFAF | 74MT3_OFAF | 74MT3_EFAF | 74MT3_WFAF | | | | | |
| 263 | 75 | 100 | 200 | — | 149 | 3RW4446-6BC34 | 74NT3_BFAF | 74NT3_DFAF | 74NT3_OFAF | 74NT3_EFAF | 74NT3_WFAF | | | | | |
| 326 | 100 | 125 | 250 | — | 186 | 3RW4447-6BC34 | 74PT3_BFAF | 74PT3_DFAF | 74PT3_OFAF | 74PT3_EFAF | 74PT3_WFAF | | | | | |
| 494 | 150 | 150 | 400 | — | 298 | 3RW4453-6BC34 | 74QT3_BFAF | 74QT3_DFAF | 74QT3_OFAF | 74QT3_EFAF | 74QT3_WFAF | | | | | |
| 551 | 150 | 200 | 450 | — | 336 | 3RW4454-6BC34 | 74RT3_BFAF | 74RT3_DFAF | 74RT3_OFAF | 74RT3_EFAF | 74RT3_WFAF | | | | | |
| 615 | 200 | 200 | 500 | — | 373 | 3RW4455-6BC34 | 74ST3_BFAF | 74ST3_DFAF | 74ST3_OFAF | 74ST3_EFAF | 74ST3_WFAF | | | | | |
| 634 | 200 | 250 | 500 | — | 373 | 3RW4456-6BC34 | 74TT3_BFAF | 74TT3_DFAF | 74TT3_OFAF | 74TT3_EFAF | 74TT3_WFAF | | | | | |
| 650 | 200 | 250 | 550 | — | 373 | 3RW4457-6BC34 | 74WT3_BFAF | 74WT3_DFAF | 74WT3_OFAF | 74WT3_EFAF | 74WT3_WFAF | | | | | |
| | | | | | | 200V | 6 | | 6 | | 6 | | 6 | | 6 | |
| | | | | | | 230V | 2 | | 2 | | 2 | | 2 | | 2 | |
| | | | | | | 380V | 3 | | 3 | | 3 | | 3 | | 3 | |
| | | | | | | 460V | 4 | | 4 | | 4 | | 4 | | 4 | |
| 26 | — | — | 15 | 20 | — | 3RW4422-1BC35 | 74AT35BFAF | 74AT35DFAF | 74AT350FAF | 74AT35EFAF | 74AT35WFAF | | | | | |
| 32 | — | — | 20 | 25 | — | 3RW4423-1BC35 | 74BT35BFAF | 74BT35DFAF | 74BT350FAF | 74BT35EFAF | 74BT35WFAF | | | | | |
| 42 | — | — | 25 | 30 | — | 3RW4424-1BC35 | 74CT35BFAF | 74CT35DFAF | 74CT350FAF | 74CT35EFAF | 74CT35WFAF | | | | | |
| 51 | — | — | 30 | 40 | — | 3RW4425-1BC35 | 74DT35BFAF | 74DT35DFAF | 74DT350FAF | 74DT35EFAF | 74DT35WFAF | | | | | |
| 68 | — | — | 50 | 50 | — | 3RW4426-1BC35 | 74ET35BFAF | 74ET35DFAF | 74ET350FAF | 74ET35EFAF | 74ET35WFAF | | | | | |
| 82 | — | — | 60 | 75 | — | 3RW4427-1BC35 | 74FT35BFAF | 74FT35DFAF | 74FT350FAF | 74FT35EFAF | 74FT35WFAF | | | | | |
| 97 | — | — | 60 | 75 | — | 3RW4434-6BC35 | 74GT35BFAF | 74GT35DFAF | 74GT350FAF | 74GT35EFAF | 74GT35WFAF | | | | | |
| 113 | — | — | 75 | 100 | — | 3RW4435-6BC35 | 74HT35BFAF | 74HT35DFAF | 74HT350FAF | 74HT35EFAF | 74HT35WFAF | | | | | |
| 134 | — | — | 75 | 125 | — | 3RW4436-6BC35 | 74JT35BFAF | 74JT35DFAF | 74JT350FAF | 74JT35EFAF | 74JT35WFAF | | | | | |
| 175 | — | — | 100 | 150 | — | 3RW4443-6BC35 | 74KT35BFAF | 74KT35DFAF | 74KT350FAF | 74KT35EFAF | 74KT35WFAF | | | | | |
| 195 | — | — | 125 | 200 | — | 3RW4444-6BC35 | 74LT35BFAF | 74LT35DFAF | 74LT350FAF | 74LT35EFAF | 74LT35WFAF | | | | | |
| 243 | — | — | 150 | 200 | — | 3RW4445-6BC35 | 74MT35BFAF | 74MT35DFAF | 74MT350FAF | 74MT35EFAF | 74MT35WFAF | | | | | |
| 263 | — | — | 200 | 250 | — | 3RW4446-6BC35 | 74NT35BFAF | 74NT35DFAF | 74NT350FAF | 74NT35EFAF | 74NT35WFAF | | | | | |
| 326 | — | — | 250 | 300 | — | 3RW4447-6BC35 | 74PT35BFAF | 74PT35DFAF | 74PT350FAF | 74PT35EFAF | 74PT35WFAF | | | | | |
| 494 | — | — | 400 | 500 | — | 3RW4453-6BC35 | 74QT35BFAF | 74QT35DFAF | 74QT350FAF | 74QT35EFAF | 74QT35WFAF | | | | | |
| 551 | — | — | 450 | 550 | — | 3RW4454-6BC35 | 74RT35BFAF | 74RT35DFAF | 74RT350FAF | 74RT35EFAF | 74RT35WFAF | | | | | |
| 615 | — | — | 500 | 600 | — | 3RW4455-6BC35 | 74ST35BFAF | 74ST35DFAF | 74ST350FAF | 74ST35EFAF | 74ST35WFAF | | | | | |
| 693 | — | — | 550 | 650 | — | 3RW4456-6BC35 | 74TT35BFAF | 74TT35DFAF | 74TT350FAF | 74TT35EFAF | 74TT35WFAF | | | | | |
| 780 | — | — | 600 | 700 | — | 3RW4457-6BC35 | 74WT35BFAF | 74WT35DFAF | 74WT350FAF | 74WT35EFAF | 74WT35WFAF | | | | | |

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Factory Modifications

| Modification Available modifications in STANDARD enclosure | 3RW Version | Enclosed Style | Enclosure NEMA Type | Mod Suffix | List Price Adder \$ |
|---|-------------|----------------|------------------------|-------------------|------------------------|
| Push Buttons | | | | | |
| Start/Stop | 3RW40/44 | 73/74 | ALL | A1 | |
| Emergency Stop | 3RW40/44 | 73/74 | ALL | ES | |
| Selector Switches | | | | | |
| Hand-Off-Auto | 3RW40/44 | 73/74 | ALL | A3 | |
| Hand-Off-Auto w/ start pushbutton | 3RW40/44 | 73/74 | ALL | S3 | |
| Off-On | 3RW40/44 | 73/74 | ALL | A4 | |
| Pilot Light | | | | | |
| Red 'On' | 3RW40/44 | 73/74 | ALL | FA | |
| Green 'On' | 3RW40/44 | 73/74 | ALL | FB | |
| Red 'Run' | 3RW40/44 | 73/74 | ALL | FC | |
| Green 'Run' | 3RW40/44 | 73/74 | ALL | FD | |
| LED Bulb Upgrade ③ | 3RW40/44 | 73/74 | ALL | FE | |
| Red 'Off' | 3RW40/44 | 73/74 | ALL | FJ | |
| Green 'Off' | 3RW40/44 | 73/74 | ALL | FK | |
| Amber 'Fault' | 3RW40/44 | 73/74 | ALL | FL | |
| White 'Control Power On' | 3RW40/44 | 73/74 | ALL | FW | |
| Red, 'On' Push-to-Test | 3RW40/44 | 73/74 | ALL | FS | |
| Green 'On' Push-to-Test | 3RW40/44 | 73/74 | ALL | FT | |
| Green 'Off' Push-to-Test | 3RW40/44 | 73/74 | ALL | FU | |
| Custom pilot light (state color and nameplate text) | 3RW40/44 | 73/74 | ALL | FZ | |
| Through the Door Metering | | | | | |
| External keypad for 3RW44 | 3RW44 | 73/74 | 1,12 | K1 | |
| Elapse time meter | 3RW40/44 | 73/74 | 1,12 (120V) | M5 | |
| Control Options | | | | | |
| Profibus Communication Module (installed-connection cable not supplied) | 3RW44 | 73/74 | ALL | P1 | |
| Profinet Communication Module (installed-connection cable not supplied) | 3RW44 | 73/74 | ALL | P2 | |
| Ground Lug - 1 Conductor | 3RW40/44 | 73/74 | ALL | L10 | |
| Alarm Package (horn, light, relay & push button) | 3RW40/44 | 73/74 | 1,3R,12 | M7 | |
| Electronic 8 function timing relay (.05s - 100h) 24V/100-127V supplied mounted and unwired | 3RW40/44 | 73/74 | ALL | TR | |
| Control Relay supplied mounted and unwired (4 pole max) | 3RW40/44 | 73/74 | ALL | R04 R22 R40 | |
| Circuit Breaker Shunt Trip (included std in 3RW40 versions) | 3RW44 | 74 | ALL | L6 | |
| Function identification plate w/ marking as specified | 3RW40/44 | 73/74 | ALL | N1 | |
| Service Entrance Labeled | 3RW40/44 | 74 | ALL | N3 | |
| Terminal Block 3 point | 3RW40/44 | 73/74 | ALL | TC3 | |
| Terminal Block 6 point | 3RW40/44 | 73/74 | ALL | TC6 | |
| Terminal Block 9 point | 3RW40/44 | 73/74 | ALL | TC9 | |
| Terminal Block 12 point | 3RW40/44 | 73/74 | ALL | TC12 | |

| Emergency HP Rated Bypass Starter | 3RW Version | Class | Enclosure NEMA Type | Mod Suffix | Amp Rating (3rd character of catalog number) | | | | | | | | | |
|-----------------------------------|-------------|-----------|------------------------|------------|--|-------|-------|-------|-----|-----|---|---------|-------|---|
| | | | | | List price Adder \$ | | | | | | | | | |
| 3RW40 new | 73/74 | 1/12/3R/4 | A12 | A,B | C,D,E | FGH | J | — | — | — | — | — | — | — |
| | | | | — | — | A | B,C | D | E,F | — | — | — | | |
| | 3RW44 | 73 | 1/12/3R/4 | A12 | A,B,C ④ | D,E ④ | F,G,H | J,K,L | M | N,P | Q | R,S,T,W | Y,Z ① | |
| | | | | | A,B,C | D,E | F,G,H | J,K,L | M | N,P | Q | R,S,T,W | Y,Z ① | |

| Available Modifications Requiring the MODIFIED OPTIONS Box Size (to be used with the selections ending in GA*) | 3RW Version | Class | Enclosure NEMA Type | Mod Suffix | Amp Rating (3rd character of catalog number) | | | | | | | | | |
|--|-------------|-------|------------------------|------------|--|-----|-------|-------|---|-----|---|---------|-------|--|
| | | | | | List price Adder \$ | | | | | | | | | |
| Isolation Contactor ③ | 3RW40 | | | | — | — | A | B,C | D | E,F | — | — | — | |
| | 3RW44 | | | | A,B,C | D,E | F,G,H | J,K,L | M | N,P | Q | R,S,T,W | Y,Z ① | |
| 100 VA Extra CPT Capacity | 3RW40/44 | 73/74 | 1/12/3R/4 | IC | | | | | | | | | | |
| Space Heater (120V separate control) | 3RW40/44 | 73/74 | ALL | CA | | | | | | | | | | |
| Space Heater w/ T-stat (120V separate control) | 3RW40/44 | 73/74 | ALL | SH | | | | | | | | | | |
| Lightning Arrestor | 3RW40/44 | 73/74 | ALL | ST | | | | | | | | | | |

① (A) For sizes 73YT & 73ZT, mods IC & A12 are available and can have both either individually or both at the same time; (B) For sizes 74YT & 74ZT (combination w/ICB), mods IC & A12 are only available individually (NOT both at the same time); (C) For sizes 74YT & 74ZT (combination w/ fusible disc), mods IC & A12 are NOT available individually or both.
 ② An isolation contactor is included for 3RW40 version with bypass.
 ③ An isolation contactor is standard on all 3RW40 new styles
 ④ Includes mod box price, change 8th character to G.
 ⑤ Pilot lights are transformer type as standard. For LED type bulbs, order suffix FE in addition to the standard device suffix(es). For example, to order red "ON" and green "OFF" pilot lights with LED bulbs, order FA, FK and FE.

3RW Soft Starters

3RW30 for standard applications

Overview

The SIRIUS 3RW30 soft starters reduce the motor voltage through variable phase control and increase it in ramp-like mode from a selectable starting voltage up to mains voltage. During starting, these devices limit the torque as well as the current and prevent the shocks which arise during direct starts or wye-delta starts. In this way, mechanical loads and mains voltage dips can be reliably reduced.

Soft starting reduces the stress on the connected equipment and results in lower wear and therefore longer periods of trouble-free production. The selectable start value means that the soft starters can be adjusted individually to the requirements of the application in question and unlike wye-delta starters are not restricted to two-stage starting with fixed voltage ratios.

The SIRIUS 3RW30 soft starters are characterized above all by their small space requirements. Integrated bypass contacts mean that no power loss has to be taken into the bargain at the power semiconductors (thyristors) after the motor has started up. This cuts down on heat losses, enabling a more compact design and making external bypass circuits superfluous.

Various versions of the SIRIUS 3RW30 soft starters are available:

- Standard version for fixed-speed three-phase motors, sizes S00, S0, S2 and S3, with integrated bypass contact system
- Version for fixed-speed three-phase motors in a 22.5 mm enclosure without bypass

Soft starters rated up to 75Hp (at 460 V) for standard applications in three-phase networks are available. Extremely small sizes, low power losses and simple commissioning are just three of the many advantages of this soft starter.

Function

The space required by the compact SIRIUS 3RW30 soft starter is often only about one third of that required by a contactor assembly for wye-delta starting of comparable rating. This not only saves space in the control cabinet and on the standard mounting rail but also does away completely with the wiring work needed for wye-delta starters. This is notable in particular for higher motor ratings which are only rarely available as fully wired solutions.

At the same time the number of cables from the starter to the motor is reduced from six to three. Compact dimensions, short start-up times, easy wiring and fast commissioning make themselves felt as clear-cut cost advantages.

The bypass contacts of these soft starters are protected during operation by an integrated solid-state arc quenching system. This prevents damage to the bypass contacts in the event of a fault, e. g. brief disconnection of the control voltage, mechanical shocks or life-related component defects on the coil operating mechanism or main contact spring.

The new series of devices comes with the "polarity balancing" control method, which is designed to prevent direct current components in two-phase controlled soft starters. On two-phase controlled soft starters the current resulting from superimposition of the two controlled phases flows in the uncontrolled phase. This results for physical reasons in an asymmetric distribution of the three phase currents during the motor ramp-up. This phenomenon cannot be influenced, but in most applications it is non-critical.

Controlling the power semiconductors results not only in this unbalance, however, but also in the previously mentioned direct current components which can cause severe noise generation on the motor at starting voltages of less than 50 %. The control method used for these soft starters eliminates these direct current components during the ramp-up phase and prevents the braking torque which they can cause.

It creates a motor ramp-up that is uniform in speed, torque and current rise, thus permitting a particularly gentle, two-phase starting of the motors. At the same time the acoustic quality of the starting operation comes close to the quality of a three-phase controlled soft starter. This is made possible by the on-going dynamic harmonizing and balancing of current half-waves of different polarity during the motor ramp-up. Hence the name "polarity balancing".

- Soft starting with voltage ramp; the starting voltage setting range U_s is 40 % to 100 % and the ramp time t_R can be set from 0 s to 20 s
- Integrated bypass contact system to minimize power loss
- Setting with two potentiometers
- Simple mounting and commissioning
- Mains voltages at 50/60 Hz, 200 to 480 V
- Two control voltage versions 24 V AC/DC and 110 to 230 V AC/DC
- Wide temperature range from -25 °C to +60 °C
- The built-in auxiliary contact ensures user-friendly control and possible further processing within the system ([for status graphs see page 7/54](#))

3RW Soft Starters

3RW30 for standard applications

Technical specifications

| Type | 3RW30 1., 3RW30 2. | | 3RW30 3., 3RW30 4. | | | |
|---|--|-------|---|-------------------------------|---------------|-------------------------------|
| Control electronics | | | | | | |
| Rated values | Terminal A1/A2 | V | 24 | 110 ... 230 | 24 | 110 ... 230 |
| Rated control supply voltage | | % | ±20 | -15/+10 | ±20 | -15/+10 |
| • Tolerance | | | | | | |
| Rated control supply current | | mA | < 50 | 6 | 20 | < 50 |
| • STANDBY | | mA | < 100 | 15 | < 4000 | < 500 |
| • During pick-up | | mA | < 100 | 15 | 20 | < 50 |
| • ON | | | | | | |
| Rated frequency | | Hz | 50/60 | | | |
| • Tolerance | | % | ±10 | | | |
| Control input | | | | | | |
| IN | | | ON/OFF | | | |
| Power consumption with version | | mA | Approx. 12 | | | |
| • 24 V DC | | mA | AC: 3/6; DC: 1.5/3 | | | |
| • 110/230 V AC | | | | | | |
| Relay outputs | | | | | | |
| Output 1 | ON | 13/14 | Operating indication (NO) | | | |
| Rated operational current | | A | 3 AC-15/AC-14 at 230 V, 1 DC-13 at 24 V | | | |
| Protection against overvoltages | | A | Protection by means of varistor through contact | | | |
| Short-circuit protection | | | 4 A gL/gG operational class; 6 A quick (fuse is not included in scope of supply) | | | |
| Operating indications | | | | | | |
| | | LEDs | DEVICE | STATE/BYPASSED/FAILURE | DEVICE | STATE/BYPASSED/FAILURE |
| Off | | | Green | Off | Green | Off |
| Start | | | Green | Green flashing | Green | Green flashing |
| Bypass | | | Green | Green | Green | Green |
| Error signals | | | | | | |
| • 24 V DC: | $U < 0.75 \times U_s$ or $U > 1.25 \times U_s$ | | Off | Red | Off | Red |
| • 110 ... 230 V AC: | $U < 0.75 \times U_s$ or $U > 1.15 \times U_s$ | | Off | Red | Off | Red |
| Electrical overloading of bypass (reset by removing IN command) | | | Yellow | Red | -- | -- |
| Missing mains voltage, phase failure, missing load | | | Green | Red | Green | Red |
| Device fault | | | Red | Red | Red | Red |

| Type | 3RW30 1. ... 3RW30 4. | | Factory default |
|---|-----------------------|------------|-----------------|
| Control times and parameters | | | |
| Control times | | | |
| Closing time (with connected control voltage) | ms | < 50 | |
| Closing time (automatic/mains contactor mode) | ms | < 300 | |
| Mains failure bridging time | | | |
| Control supply voltage | ms | 50 | |
| Mains failure response time¹⁾ | | | |
| Load circuit | ms | 500 | |
| Starting parameters | | | |
| • Starting time | s | 0 ... 20 | 7.5 |
| • Starting voltage | % | 40 ... 100 | 40 |
| Start-up detection | | | |
| | | No | |
| Operating mode output 13/14 | | | |
| Rising edge at | Start command | ON | |
| Falling edge at | Off command | | |

¹⁾ Mains failure detection only in standby state, not during operation.

3RW Soft Starters

3RW30 for standard applications

| Type | 3RW30 1.-.BB.4 ... 3RW30 4.-.BB.4 | |
|---|--|--|
| Power electronics | | |
| Rated operational voltage | V AC | 200 ... 480 |
| Tolerance | % | -15/+10 |
| Rated frequency | Hz | 50/60 |
| Tolerance | % | ±10 |
| Uninterrupted duty at 40 °C (% of I_{θ}) | % | 115 |
| Minimum load (% of I_{θ}) | % | 10 (at least 2 A) |
| Maximum cable length between soft starter and motor | m | 300 |
| Permissible installation height | m | 5000 (derating from 1000, see characteristic curves); higher on request |
| Permissible mounting position (auxiliary fan not available) | | |
| Permissible ambient temperature | °C | -25 ... +60; (derating from +40) |
| Operation | °C | -40 ... +80 |
| Storage | | |
| Degree of protection | IP20 for 3RW30 1. and 3RW30 2. ; IP00 for 3RW30 3. and 3RW30 4. | |

| Type | 3RW30 13 3RW30 14 3RW30 16 3RW30 17 3RW30 18 | | | | | |
|--|--|---------------------|--------------------|----------------|---------------------|---------------------|
| Power electronics | | | | | | |
| 40 °C/50 °C/60 °C | | | | | | |
| Load rating with rated operational current I_{θ} | | | | | | |
| • Acc. to IEC and UL/CSA ¹⁾ , for individual mounting at 40/50/60 °C, AC-53a | A | 3.6/ 3.3 /3 | 6.5/ 6 /5.5 | 9/ 8 /7 | 12.5/ 12 /11 | 17.6/ 17 /14 |
| Power loss | | | | | | |
| • In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 0.25 | 0.5 | 1 | 2 | 4 |
| • During starting with 300 % I_M (40 °C) | W | 6 | 13 | 20 | 20 | 29 |
| Permissible rated motor current and starts per hour for normal starting (Class 10) | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 10 s | A | 3.6/ 3.3 /3 | 6.5/ 6 /5.5 | 9/ 8 /7 | 12.5/ 12 /11 | 17.6/ 17 /14 |
| - Starts per hour ³⁾ | 1/h | 200/ 150 /70 | 87/ 60 /50 | 50 | 85/ 70 /60 | 62/ 46 /60 |
| - Rated motor current $I_M^{(2)}$, starting time 20 s | A | 3.6/ 3.3 /3 | 6.5/ 6 /5.5 | 9/ 8 /7 | 12.5/ 12 /11 | 17.6/ 17 /14 |
| - Starts per hour ³⁾ | 1/h | 150/ 100 /50 | 64/ 46 /28 | 35 | 62/ 47 /37 | 45/ 32 /43 |

¹⁾ Measurement at 60 °C according to UL/CSA not required.
²⁾ With 300 % I_M .

³⁾ For intermittent duty S4 with ON period = 30 %, $T_U = 40$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.

| Type | 3RW30 26 3RW30 27 3RW30 28 | | | |
|--|----------------------------------|---------------------|---------------------|-------------------|
| Power electronics | | | | |
| 40 °C/50 °C/60 °C | | | | |
| Load rating with rated operational current I_{θ} | | | | |
| • Acc. to IEC and UL/CSA ¹⁾ , for individual mounting at 40/50/60 °C, AC-53a | A | 25.3/ 23 /21 | 32.2/ 29 /26 | 38/ 34 /31 |
| Power loss | | | | |
| • In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 8 | 13 | 19 |
| • During starting with 300 % I_M (40 °C) | W | 47 | 55 | 64 |
| Permissible rated motor current and starts per hour for normal starting (Class 10) | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 10 s | A | 25/ 23 /21 | 32/ 29 /26 | 38/ 34 /31 |
| - Starts per hour ³⁾ | 1/h | 23 | 23 | 19 |
| - Rated motor current $I_M^{(2)}$, starting time 20 s | A | 25/ 23 /21 | 32/ 29 /26 | 38/ 34 /31 |
| - Starts per hour ³⁾ | 1/h | 15 | 16 | 12 |

¹⁾ Measurement at 60 °C according to UL/CSA not required.
²⁾ With 300 % I_M .
³⁾ For intermittent duty S4 with ON period = 30 %, $T_U = 40$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.

3RW Soft Starters

3RW30 for standard applications

| Type | | 3RW30 36 | 3RW30 37 | 3RW30 38 | 3RW30 46 | 3RW30 47 |
|--|-----|-------------------|----------|----------|----------|-----------|
| Power electronics | | 40 °C/50 °C/60 °C | | | | |
| Load rating with rated operational current I_e | | | | | | |
| • Acc. to IEC and UL/CSA ¹⁾ , for individual mounting at 40/50/60 °C, AC-53a | A | 45/42/39 | 63/58/53 | 72/63/60 | 80/73/66 | 106/98/90 |
| Power loss | | | | | | |
| • In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 6 | 12 | 15 | 12 | 21 |
| • During starting with 300 % I_M (40 °C) | W | 79 | 111 | 125 | 144 | 192 |
| Permissible rated motor current and starts per hour for normal starting (Class 10) | | | | | | |
| - Rated motor current I_M ²⁾ , starting time 10 s | A | 45/42/39 | 63/58/53 | 72/63/60 | 80/73/66 | 106/98/90 |
| - Starts per hour ³⁾ | 1/h | 38 | 23 | 22 | 22 | 15 |
| - Rated motor current I_M ²⁾ , starting time 20 s | A | 45/42/39 | 63/58/53 | 72/63/60 | 80/73/66 | 106/98/90 |
| - Starts per hour ³⁾ | 1/h | 26 | 15 | 15 | 15 | 10 |




¹⁾ Measurement at 60 °C according to UL/CSA not required.

²⁾ With 300 % I_M .

³⁾ For intermittent duty S4 with ON period = 30 %, $T_U = 40$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.

3RW Soft Starters

3RW30 for standard applications

| Soft starters | Type | | 3RW30 1. | 3RW30 2. | 3RW30 3. | 3RW30 4. |
|---|---|-----------------|--|--|-------------------------------------|-------------------------------------|
| Conductor cross-sections | | | | | | |
| Screw terminals | | | | | | |
| Front clamping point connected | | | | | | |
|  | • Solid | mm ² | 2 x (1 ... 2.5); 2 x (2.5 ... 6) acc. to IEC 60947 | 2 x (1 ... 2.5); 2 x (2.5 ... 6) acc. to IEC 60947; max. 1 x 10 | 2 x (1.5 ... 16) | 2 x (2.5 ... 16) |
| | • Finely stranded with end sleeve | mm ² | 2 x (1.5 ... 2.5); 2 x (2.5 ... 6) | 2 x (1 ... 2.5); 2 x (2.5 ... 6) | 1 x (0.75 ... 25) | 1 x (2.5 ... 35) |
| | • Stranded | mm ² | -- | -- | 1 x (0.75 ... 35) | 1 x (4 ... 70) |
|  | • AWG cables - Solid - Solid or stranded - Stranded | AWG | 2 x (16 ... 12) 2 x (14 ... 10) 1 x 8 | 2 x (16 ... 12) 2 x (14 ... 10) 1 x 8 | 1 x (18 ... 2) -- | 1 x (10 ... 2/0) -- |
| | • Solid | mm ² | -- | -- | 2 x (1.5 ... 16) | 2 x (2.5 ... 16) |
| | • Finely stranded with end sleeve | mm ² | -- | -- | 1 x (1.5 ... 25) | 1 x (2.5 ... 50) |
|  | • Stranded | mm ² | -- | -- | 1 x (1.5 ... 35) | 1 x (10 ... 70) |
| | • AWG cables - Solid or stranded | AWG | -- | -- | 1 x (16 ... 2) | 1 x (10 ... 2/0) |
| | • Solid | mm ² | -- | -- | 2 x (1.5 ... 16) | 2 x (2.5 ... 16) |
| Both clamping points connected | • Stranded | mm ² | -- | -- | 2 x (1.5 ... 25) | 2 x (10 ... 50) |
| | • Finely stranded with end sleeve | mm ² | -- | -- | 2 x (1.5 ... 16) | 2 x (2.5 ... 35) |
| | • AWG cables - Solid or stranded | AWG | -- | -- | 2 x (16 ... 2) | 2 x (10 ... 1/0) |
| | • Tightening torque | NM lb.in | 2 ... 2.5 18 ... 22 | 2 ... 2.5 18 ... 22 | 4.5 40 | 6.5 58 |
| | Tools | | PZ 2 | PZ 2 | PZ 2 | Allen screw 4 mm |
| | Degree of protection | | IP20 | IP20 | IP20 (IP00 terminal compartment) | IP20 (IP00 terminal compartment) |
| Spring-type terminals | | | | | | |
| Main conductors | | | | | | |
| | • Solid | mm ² | 1 ... 4 | 1 ... 10 | -- | -- |
| | • Finely stranded with end sleeve | mm ² | 1 ... 2.5 | 1 ... 6, end sleeves without plastic collar | -- | -- |
| | • AWG cables - Solid or stranded (finely stranded) - Stranded | AWG | 16 ... 14 16 ... 12 | 16 ... 10 1 x 8 | -- -- | -- -- |
| | Tools | | DIN ISO 2380-1A0; 5 x 3 | DIN ISO 2380-1A0; 5 x 3 | -- | -- |
| | Degree of protection | | IP20 | IP20 | -- | -- |
| Busbar connections | | | | | | |
| Main conductors | | | | | | |
| | • With cable lug acc. to DIN 46234 or max. 20 mm wide | | | | | |
| | - Stranded | mm ² | -- | -- | -- | 2 x (10 ... 70) |
| | - Finely stranded | mm ² | -- | -- | -- | 2 x (10 ... 50) |
| | • AWG cables, solid or stranded | AWG | -- | -- | -- | 2 x (7 ... 1/0) |

| Soft starters | Type | | 3RW30 1. ... 3RW30 4. | | | |
|---|--|-----------------|------------------------------------|--|--|--|
| Conductor cross-sections | | | | | | |
| Auxiliary conductors (1 or 2 conductors can be connected): | | | | | | |
| Screw terminals | | | | | | |
| | • Solid | mm ² | 2 x (0.5 ... 2.5) | | | |
| | • Finely stranded with end sleeve | mm ² | 2 x (0.5 ... 1.5) | | | |
| | • AWG cables - Solid or stranded - Finely stranded with end sleeve | AWG | 2 x (20 ... 14) 2 x (20 ... 16) | | | |
| | • Terminal screws - Tightening torque | NM lb.in | 0.8 ... 1.2 7 ... 10.3 | | | |
| Spring-type terminals | | | | | | |
| | • Solid | mm ² | 2 x (0.25 ... 2.5) | | | |
| | • Finely stranded with end sleeve | mm ² | 2 x (0.25 ... 1.5) | | | |
| | • AWG cables, solid or stranded | AWG | 2 x (24 ... 14) | | | |

3RW Soft Starters

3RW30 for standard applications

| Type | | 3RW30 03 |
|--|-----------------|--|
| Control electronics | | |
| Rated values | | |
| Rated control supply voltage | V | 24 ... 230 AC/DC |
| • Tolerance | % | ± 10 |
| Rated control supply current | mA | 25 ... 4 |
| Rated frequency at AC | Hz | 50/60 |
| • Tolerance | % | ± 10 |
| Starting time | s | 0.1 ... 20 (adjustable) |
| Starting voltage | % | 40 ... 100 (adjustable) |
| Ramp-down time | s | 0 ... 20 (adjustable) |
| Power electronics | | |
| Rated operational voltage | V AC | 200 ... 400 |
| Tolerance | % | ± 10 |
| Rated frequency | Hz | 50/60 |
| Tolerance | % | ± 10 |
| Uninterrupted duty (% of I_e) | % | 100 |
| Minimum load¹⁾ (% of I_e); at 40 °C | % | 9 |
| Maximum conductor length between soft starter and motor | m | 100 ²⁾ |
| Degree of protection acc. to IEC 60529 | | IP20 (IP00 terminal compartment) |
| Permissible installation height | m | 5000 (derating from 1000, see characteristic curves); higher on request |
| Permissible mounting position | | |
| Permissible ambient temperature | | |
| Operation | °C | -25 ... +60; (derating from +40) |
| Storage | °C | -40 ... +80 |
| Load rating with rated operational current I_e | | |
| • Acc. to IEC and UL/CSA ¹⁾ , for individual mounting, AC-53a | | |
| - At 40 °C | A | 3 |
| - At 50 °C | A | 2.6 |
| - At 60 °C | A | 2.2 |
| • Acc. to IEC and UL/CSA ¹⁾ , for butt-mounting, AC-53a | | |
| - At 40 °C | A | 2.6 |
| - At 50 °C | A | 2.2 |
| - At 60 °C | A | 1.8 |
| Power loss | | |
| • In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 6.5 |
| • At utilization of max. switching frequency | W | 3 |
| Permissible starts per hour | | |
| • For intermittent duty S4, $T_u = 40$ °C, stand-alone installation vertical | 1/h | 1500 |
| • ON period = 70 % | % I_e /s | 300/0.2 |
| Conductor cross-sections | | |
| Screw terminals (1 or 2 conductors connectable) For standard screwdriver size 2 and Pozidriv 2 | | |
| • Main conductors | | |
| - Solid | mm ² | 1 x (0.5 ... 4); 2 x (0.5 ... 2.5) |
| - Finely stranded with end sleeve | mm ² | 1 x (0.5 ... 2.5); 2 x (0.5 ... 1.5) |
| - Stranded | mm ² | - |
| - AWG cables, solid or stranded | AWG | 2 x (20 ... 14) |
| - Terminal screws | | M3, PZ2 |
| - Tightening torque | NM lb.in | 0.8 ... 1.2 7.1 ... 8.9 |
| • Auxiliary conductors | | |
| - Solid | mm ² | 1 x (0.5 ... 4); 2 x (0.5 ... 2.5) |
| - Finely stranded with end sleeve | mm ² | 1 x (0.5 ... 2.5); 2 x (0.5 ... 1.5) |
| - AWG cables, solid or stranded | AWG | 2 x (20 ... 14) |
| - Terminal screws | | M3, PZ2 |
| - Tightening torque | NM lb.in | 0.8 ... 1.2 7 ... 8.9 |
| Spring-type terminals | | |
| Main and auxiliary conductors | | |
| • Solid | mm ² | 2 x (0.25 ... 1.5) |
| • Finely stranded with end sleeve | mm ² | 2 x (0.25 ... 1) |
| • AWG cables, solid or stranded | mm ² | 2 x (24 ... 16) |

¹⁾ The rated motor current (specified on the motor's name plate) should at least amount to the specified percentage of the SIRIUS soft starter unit's rated operational current I_e .

²⁾ If this value is exceeded, problems with line capacities may arise, which can result in false firing.

3RW Soft Starters

3RW30 for standard applications

| | Standard | Parameters |
|--|--|---|
| Electromagnetic compatibility Acc. to EN 60947-4-2 | | |
| <i>EMC interference immunity</i> | | |
| Electrostatic discharge (ESD) | EN 61000-4-2 | ±4 kV contact discharge, ±8 kV air discharge |
| Electromagnetic RF fields | EN 61000-4-3 | Frequency range: 80 ... 2000 MHz with 80 % at 1 kHz Degree of severity 3: 10 V/m |
| Conducted RF interference | EN 61000-4-6 | Frequency range: 150 kHz ... 80 MHz with 80 % at 1 kHz Interference 10 V |
| RF voltages and RF currents on cables | | |
| • Burst | EN 61000-4-4 | ±2 kV/5 kHz |
| • Surge | EN 61000-4-5 | ±1 kV line to line ±2 kV line to earth |
| <i>EMC interference emission</i> | | |
| EMC interference field strength | EN 55011 | Limit value of Class A at 30 ... 1000 MHz, limit value of Class B for 3RW30 2.; 24 V AC/DC |
| Radio interference voltage | EN 55011 | Limit value of Class A at 0.15 ... 30 MHz, limit value of Class B for 3RW30 2.; 24 V AC/DC |
| <i>Radio interference suppression filters</i> | | |
| Degree of noise suppression A (industrial applications) | Not required | |
| Degree of noise suppression B (applications for residential areas) Control voltage | Not available ¹⁾ | |
| • 230 V AC/DC | Not required for 3RW30 1. and 3RW30 2.; | |
| • 24 V AC/DC | required for 3RW30 3. and 3RW30 4. (see Table) | |

¹⁾ Degree of noise suppression B cannot be obtained through the use of filters as the strength of the electromagnetic field is not attenuated by the filter.

| Soft starter type | Rated current Soft starters A | Recommended filters ¹⁾ | | |
|-------------------|-------------------------------------|-----------------------------------|----------------------------|------------------------------|
| | | Voltage range 200 ... 480 V | | |
| | | Filter type | Rated current filters A | Terminals mm ² |
| 3RW30 36 | 45 | 4EF1512-1AA10 | 50 | 16 |
| 3RW30 37 | 63 | 4EF1512-2AA10 | 66 | 25 |
| 3RW30 38 | 72 | 4EF1512-3AA10 | 90 | 25 |
| 3RW30 46 | 80 | 4EF1512-3AA10 | 90 | 25 |
| 3RW30 47 | 106 | 4EF1512-4AA10 | 120 | 50 |

¹⁾ The radio interference suppression filter is used to remove the conducted interference from the main circuit. The field-related emissions comply with degree of noise suppression B. Filter selection applies under standard conditions: 10 starts per hour, start time 4 s at 300 % I_G .

| Type Number | Max. Fuse Class K5, RK5, RK1 | Max. Fuse Class J | Short Voltage Circuit | Voltage |
|--|------------------------------|-------------------|-----------------------|---------|
| <i>Standard short circuit ratings 3RW30</i> | | | | |
| 3RW30 13 | -- | 15 A | 5 kA | 480 V |
| 3RW30 14 | -- | 25 A | 5 kA | 480 V |
| 3RW30 16 | -- | 36 A | 5 kA | 480 V |
| 3RW30 17 | -- | 50 A | 5 kA | 480 V |
| 3RW30 18 | -- | 60 A | 5 kA | 480 V |
| 3RW30 26 | 100 A | 100 A | 5 kA | 480 V |
| 3RW30 27 | 125 A | 125 A | 5 kA | 480 V |
| 3RW30 28 | 125 A | 125 A | 5 kA | 480 V |
| 3RW30 36 | 175 A | 175 A | 10 kA | 480 V |
| 3RW30 37 | 250 A | 250 A | 10 kA | 480 V |
| 3RW30 38 | 250 A | 250 A | 10 kA | 480 V |
| 3RW30 46 | -- | 300 A | 10 kA | 480 V |
| 3RW30 47 | -- | 350 A | 10 kA | 480 V |
| <i>High capacity short circuit ratings 3RW30</i> | | | | |
| 3RW30 13 | -- | 15 A | 42 kA | 480 V |
| 3RW30 14 | -- | 25 A | 42 kA | 480 V |
| 3RW30 16 | -- | 25 A | 42 kA | 480 V |
| 3RW30 17 | -- | 25 A | 42 kA | 480 V |
| 3RW30 18 | -- | 25 A | 42 kA | 480 V |
| 3RW30 26 | 60 A | 100 A | 42 kA | 480 V |
| 3RW30 27 | 60 A | 125 A | 42 kA | 480 V |
| 3RW30 28 | 60 A | 125 A | 42 kA | 480 V |
| 3RW30 36 | 100 A | 175 A | 30 kA | 480 V |
| 3RW30 37 | 100 A | 200 A | 30 kA | 480 V |
| 3RW30 38 | 100 A | 200 A | 30 kA | 480 V |
| 3RW30 46 | 110 A | 200 A | 42 kA | 480 V |
| 3RW30 47 | 110 A | 200 A | 42 kA | 480 V |

For solid-state motor controller, Type 3RW301: Applicable in an enclosure with minimum overall dimensions of 200 by 120 by 200 mm.
 For solid-state motor controller, Type 3RW302: Applicable in an enclosure with minimum overall dimensions of 370 by 175 by 195 mm.
 For solid-state motor controller, Type 3RW303: Applicable in an enclosure with minimum overall dimensions of 450 by 220 by 235 mm.
 For solid-state motor controller, Type 3RW304: Applicable in an enclosure with minimum overall dimensions of 450 by 220 by 235 mm.

3RW Soft Starters


3RW30 for standard applications

Fuse assignment

The type of coordination to which the motor feeder with soft starter is mounted depends on the application-specific requirements. Normally, fuseless mounting (combination of motor starter protector/circuit breaker and soft starter) is sufficient.

If type of coordination "2" is to be fulfilled, semiconductor fuses must be fitted in the motor feeder.

Fused version (line protection only)



| Soft starters Q11 Type | Rated current A | Line protection, maximum | | Size | Line contactors (optional) Q21 |
|---|--------------------|--------------------------|--------------------|------|--------------------------------------|
| | | F1 Type | Rated current A | | |
| Type of coordination "1"¹⁾: $I_q = 65 \text{ kA at } 480 \text{ V } 10 \%$ | | | | | |
| 3RW30 03 ²⁾ | 3 | 3NA3 805 ³⁾ | 20 | 000 | 3RT10 15 |
| 3RW30 13 | 3.6 | 3NA3 803-6 | 10 | 000 | 3RT10 15 |
| 3RW30 14 | 6.5 | 3NA3 805-6 | 16 | 000 | 3RT10 15 |
| 3RW30 16 | 9 | 3NA3 807-6 | 20 | 000 | 3RT10 16 |
| 3RW30 17 | 12.5 | 3NA3 810-6 | 25 | 000 | 3RT10 24 |
| 3RW30 18 | 17.6 | 3NA3 814-6 | 35 | 000 | 3RT10 26 |
| 3RW30 26 | 25 | 3NA3 822-6 | 63 | 00 | 3RT10 26 |
| 3RW30 27 | 32 | 3NA3 824-6 | 80 | 00 | 3RT10 34 |
| 3RW30 28 | 38 | 3NA3 824-6 | 80 | 00 | 3RT10 35 |
| 3RW30 36 | 45 | 3NA3 130-6 | 100 | 1 | 3RT10 36 |
| 3RW30 37 | 63 | 3NA3 132-6 | 125 | 1 | 3RT10 44 |
| 3RW30 38 | 72 | 3NA3 132-6 | 125 | 1 | 3RT10 45 |
| 3RW30 46 | 80 | 3NA3 136-6 | 160 | 1 | 3RT10 45 |
| 3RW30 47 | 106 | 3NA3 136-6 | 160 | 1 | 3RT10 46 |


¹⁾ The types of coordination are explained in more detail under "3RA1 Fuseless Load Feeders".

The type of coordination "1" refers only to soft starters in combination with the stipulated protective device (motor starter protector/circuit breaker/fuse), not to any additional components in the feeder.

²⁾ $I_q = 50 \text{ kA at } 400 \text{ V}$.

³⁾ 3NA3 805-1 (LV HRC00), 5SB2 61 (DIAZED), 5SE2 201-6 (NEOZED)

Fused version with 3NE1 SITOR fuses (semiconductor and line protection)



For matching fuse bases see Catalog LV 1 under "SENTRON Switching and Protection Devices for Power Distribution" —> "Switch Disconnectors", and Catalog ET B1 under "BETA Protecting" —> "SITOR Semiconductor Fuses" or go to www.siemens.com/sitor —> "Products" —> "BETA Protecting" —> "SITOR"

| Soft starters Q11 Type | Rated current A | All-range fuses | | Size | Line contactors (optional) Q21 |
|---|--------------------|--------------------------|--------------------|------|--------------------------------------|
| | | F1 Type | Rated current A | | |
| Type of coordination "2"¹⁾: $I_q = 65 \text{ kA at } 480 \text{ V } 10 \%$ | | | | | |
| 3RW30 03 ²⁾ | 3 | 3NE1 813-0 ³⁾ | 16 | 000 | 3RT10 15 |
| 3RW30 13 | 3.6 | 3NE1 813-0 | 16 | 000 | 3RT10 15 |
| 3RW30 14 | 6.5 | 3NE1 813-0 | 16 | 000 | 3RT10 15 |
| 3RW30 16 | 9 | 3NE1 813-0 | 16 | 000 | 3RT10 16 |
| 3RW30 17 | 12.5 | 3NE1 813-0 | 16 | 000 | 3RT10 24 |
| 3RW30 18 | 17.6 | 3NE1 814-0 | 20 | 000 | 3RT10 26 |
| 3RW30 26 | 25 | 3NE1 803-0 | 35 | 000 | 3RT10 26 |
| 3RW30 27 | 32 | 3NE1 020-2 | 80 | 00 | 3RT10 34 |
| 3RW30 28 | 38 | 3NE1 020-2 | 80 | 00 | 3RT10 35 |
| 3RW30 36 | 45 | 3NE1 020-2 | 80 | 00 | 3RT10 36 |
| 3RW30 37 | 63 | 3NE1 820-0 | 80 | 000 | 3RT10 44 |
| 3RW30 38 | 72 | 3NE1 820-0 | 80 | 000 | 3RT10 45 |
| 3RW30 46 | 80 | 3NE1 021-0 | 100 | 00 | 3RT10 45 |
| 3RW30 47 | 106 | 3NE1 022-0 | 125 | 00 | 3RT10 46 |

¹⁾ The types of coordination are explained in more detail under "3RA1 Fuseless Load Feeders".

The type of coordination "2" refers only to soft starters in combination with the stipulated protective device (motor starter protector/circuit breaker/fuse), not to any additional components in the feeder.

²⁾ $I_q = 50 \text{ kA at } 400 \text{ V}$.



³⁾ No SITOR fuse required!
Alternatively: 3NA3 803 (LV HRC00), 5SB2 21 (DIAZED), 5SE2 206 (NEOZED).

| | |
|--|--------------------------|
| TOC 1 | Type of coordination "1" |
| TOC 2 | Type of coordination "2" |
| The types of coordination are explained in more detail under "3RA1 Fuseless Load Feeders". | |
| These types of coordination are indicated in the Technical specifications by gray backgrounds. | |

3RW Soft Starters

3RW30 for standard applications

Fused version with 3NE3 SITOR fuses (semiconductor protection by fuse, line and overload protection by motor starter protector; alternatively, installation with contactor and overload relay possible)



For matching fuse bases see Catalog LV 1 under "SENTRON Switching and Protection Devices for Power Distribution" → "Switch Disconnectors", and Catalog ET B1 under "BETA Protecting" → "SITOR Semiconductor Fuses" or go to www.siemens.com/sitor → "Products" → "BETA Protecting" → "SITOR"

| Soft starters Toc 2 Q11 Type | Rated current A | Semiconductor fuses, minimum | | | Semiconductor fuses, maximum | | | Semiconductor fuses, minimum | | |
|---|--------------------|------------------------------|--------------------|------|------------------------------|--------------------|------|------------------------------|--------------------|------|
| | | F3 Type | Rated current A | Size | F3 Type | Rated current A | Size | F3 Type | Rated current A | Size |
| Type of coordination "2"¹⁾: I_q = 65 kA at 480 V 10 % | | | | | | | | | | |
| 3RW30 03 ²⁾ | 3 | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| 3RW30 13 | 3.6 | -- | -- | -- | -- | -- | -- | 3NE4 101 | 32 | 0 |
| 3RW30 14 | 6.5 | -- | -- | -- | -- | -- | -- | 3NE4 101 | 32 | 0 |
| 3RW30 16 | 9 | -- | -- | -- | -- | -- | -- | 3NE4 101 | 32 | 0 |
| 3RW30 17 | 12.5 | -- | -- | -- | -- | -- | -- | 3NE4 101 | 32 | 0 |
| 3RW30 18 | 17.6 | -- | -- | -- | 3NE3 221 | 100 | 1 | 3NE4 101 | 32 | 0 |
| 3RW30 26 | 25 | -- | -- | -- | 3NE3 221 | 100 | 1 | 3NE4 102 | 40 | 0 |
| 3RW30 27 | 32 | -- | -- | -- | 3NE3 222 | 125 | 1 | 3NE4 118 | 63 | 0 |
| 3RW30 28 | 38 | -- | -- | -- | 3NE3 222 | 125 | 1 | 3NE4 118 | 63 | 0 |
| 3RW30 36 | 45 | -- | -- | -- | 3NE3 224 | 160 | 1 | 3NE4 120 | 80 | 0 |
| 3RW30 37 | 63 | -- | -- | -- | 3NE3 225 | 200 | 1 | 3NE4 121 | 100 | 0 |
| 3RW30 38 | 72 | 3NE3 221 | 100 | 1 | 3NE3 227 | 250 | 1 | -- | -- | -- |
| 3RW30 46 | 80 | 3NE3 222 | 125 | 1 | 3NE3 225 | 200 | 1 | -- | -- | -- |
| 3RW30 47 | 106 | 3NE3 224 | 160 | 1 | 3NE3 231 | 350 | 1 | -- | -- | -- |

| Soft starters Toc 2 Q11 Type | Rated current A | Semiconductor fuses max. | | | Semiconductor fuses min. | | | Semiconductor fuses max. | | | Cylindrical fuses | |
|---|--------------------|--------------------------|--------------------|------|--------------------------|--------------------|------|--------------------------|--------------------|------|-------------------|--------------------|
| | | F3 Type | Rated current A | Size | F3 Type | Rated current A | Size | F3 Type | Rated current A | Size | F3 Type | Rated current A |
| Type of coordination "2"¹⁾: I_q = 65 kA at 480 V 10 % | | | | | | | | | | | | |
| 3RW30 03 ²⁾ | 3 | -- | -- | -- | 3NE8 015-1 | 25 | 00 | 3NE8 015-1 | 25 | 00 | 3NC1 010 | 10 |
| 3RW30 13 | 3.6 | -- | -- | -- | 3NE8 015-1 | 25 | 00 | 3NE8 015-1 | 25 | 00 | 3NC2 220 | 20 |
| 3RW30 14 | 6.5 | -- | -- | -- | 3NE8 015-1 | 25 | 00 | 3NE8 015-1 | 25 | 00 | 3NC2 220 | 20 |
| 3RW30 16 | 9 | -- | -- | -- | 3NE8 015-1 | 25 | 00 | 3NE8 015-1 | 25 | 00 | 3NC2 220 | 20 |
| 3RW30 17 | 12.5 | -- | -- | -- | 3NE8 015-1 | 25 | 00 | 3NE8 018-1 | 63 | 00 | 3NC2 250 | 50 |
| 3RW30 18 | 17.6 | -- | -- | -- | 3NE8 003-1 | 35 | 00 | 3NE8 021-1 | 100 | 00 | 3NC2 263 | 63 |
| 3RW30 26 | 25 | 3NE4 117 | 50 | 0 | 3NE8 017-1 | 50 | 00 | 3NE8 021-1 | 100 | 00 | 3NC2 263 | 63 |
| 3RW30 27 | 32 | 3NE4 118 | 63 | 0 | 3NE8 018-1 | 63 | 00 | 3NE8 022-1 | 125 | 00 | 3NC2 280 | 80 |
| 3RW30 28 | 38 | 3NE4 118 | 63 | 0 | 3NE8 020-1 | 80 | 00 | 3NE8 022-1 | 125 | 00 | 3NC2 280 | 80 |
| 3RW30 36 | 45 | 3NE4 120 | 80 | 0 | 3NE8 020-1 | 80 | 00 | 3NE8 024-1 | 160 | 00 | 3NC2 280 | 80 |
| 3RW30 37 | 63 | 3NE4 121 | 100 | 0 | 3NE8 021-1 | 100 | 00 | 3NE8 024-1 | 160 | -- | -- | -- |
| 3RW30 38 | 72 | -- | -- | -- | 3NE8 022-1 | 125 | 00 | 3NE8 024-1 | 160 | 00 | -- | -- |
| 3RW30 46 | 80 | -- | -- | -- | 3NE8 022-1 | 125 | 00 | 3NE8 024-1 | 160 | 00 | -- | -- |
| 3RW30 47 | 106 | -- | -- | -- | 3NE8 024-1 | 160 | 00 | 3NE8 024-1 | 160 | 00 | -- | -- |

| Soft starters Toc 2 Q11 Type | Rated current A | Line contactors (optional) | | Motor starter protectors 400 V +10 % | | Line protection, maximum | | |
|---|--------------------|----------------------------|----------|--------------------------------------|--------------------|--------------------------|--------------------|------|
| | | Q21 | Q1 | Type | Rated current A | F1 Type | Rated current A | Size |
| Type of coordination "2"¹⁾: I_q = 65 kA at 480 V 10 % | | | | | | | | |
| 3RW30 03 ²⁾ | 3 | 3RT10 15 | 3RT10 15 | 3RV10 11-1EA10 | 4 | 3NA3 805 ³⁾ | 20 | 000 |
| 3RW30 13 | 3.6 | 3RT10 15 | 3RT10 15 | 3RV10 21-1FA10 | 5 | 3NA3 803-6 | 16 | 000 |
| 3RW30 14 | 6.5 | 3RT10 15 | 3RT10 15 | 3RV10 21-1HA10 | 8 | 3NA3 805-6 | 16 | 000 |
| 3RW30 16 | 9 | 3RT10 16 | 3RT10 16 | 3RV10 21-1JA10 | 10 | 3NA3 807-6 | 20 | 000 |
| 3RW30 17 | 12.5 | 3RT10 24 | 3RT10 24 | 3RV10 21-1KA10 | 12.5 | 3NA3 810-6 | 25 | 000 |
| 3RW30 18 | 17.6 | 3RT10 26 | 3RT10 26 | 3RV10 21-1BA10 | 20 | 3NA3 814-6 | 35 | 000 |
| 3RW30 26 | 25 | 3RT10 26 | 3RT10 26 | 3RV10 31-4DA10 | 25 | 3NA3 822-6 | 63 | 00 |
| 3RW30 27 | 32 | 3RT10 34 | 3RT10 34 | 3RV10 31-4EA10 | 32 | 3NA3 824-6 | 80 | 00 |
| 3RW30 28 | 38 | 3RT10 35 | 3RT10 35 | 3RV10 31-4FA10 | 40 | 3NA3 824-6 | 80 | 00 |
| 3RW30 36 | 45 | 3RT10 36 | 3RT10 36 | 3RV10 31-4GA10 | 45 | 3NA3 130-6 | 100 | 1 |
| 3RW30 37 | 63 | 3RT10 44 | 3RT10 44 | 3RV10 41-4JA10 | 63 | 3NA3 132-6 | 125 | 1 |
| 3RW30 38 | 72 | 3RT10 45 | 3RT10 45 | 3RV10 41-4KA10 | 75 | 3NA3 132-6 | 125 | 1 |
| 3RW30 46 | 80 | 3RT10 45 | 3RT10 45 | 3RV10 41-4LA10 | 90 | 3NA3 136-6 | 160 | 1 |
| 3RW30 47 | 106 | 3RT10 46 | 3RT10 46 | 3RV10 41-4MA10 | 100 | 3NA3 136-6 | 160 | 1 |


¹⁾ The types of coordination are explained under "3RA1 Fuseless Load Feeders". The type of coordination "2" refers only to soft starters in combination with the stipulated protective device (motor starter protector/circuit breaker/fuse), not to any additional components in the feeder.
²⁾ I_q = 50 kA at 400 V.
³⁾ 3NA3 805-1 (LV HRC00), 5SB2 61 (DIAZED).

3RW Soft Starters

3RW30 for standard applications

Characteristic curves

Permissible installation height

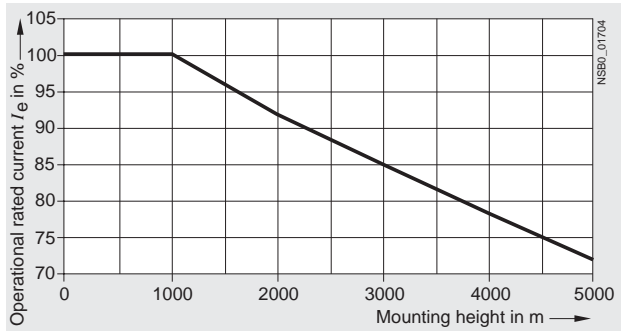

At an installation height above 2000 m, the max. permissible operational voltage is reduced to 460 V.

More information

Application examples for normal starting (Class 10)

Normal starting Class 10 (up to 20 s with 300 % $I_{n \text{ motor}}$).
 The soft starter rating can be selected to be as high as the rating of the motor used

| Application | Conveyor belt | Roller conveyor | Compressor | Small fan | Pump | Hydraulic pump |
|-------------------------------------|---------------|-----------------|------------|-----------|------|----------------|
| Starting parameters | | | | | | |
| • Voltage ramp and current limiting | | | | | | |
| - Starting voltage | % 70 | 60 | 50 | 40 | 40 | 40 |
| - Starting time | s 10 | 10 | 20 | 20 | 10 | 10 |

Note:
 These tables present sample set values and device sizes. They are intended only for the purposes of information and are not binding. The set values depend on the application in question and must be optimized during commissioning.
 The soft starter dimensions should be checked where necessary with the Win-Soft Starter software or with the help of Technical Assistance.

3RW Soft Starters

3RW30 for standard applications

Configuration

The 3RW solid-state motor controllers are designed for easy starting conditions. In the event of deviating conditions or increased switching frequency, it may be necessary to choose a larger device. For accurate dimensioning, use the Win-Soft Starter selection and simulation program.

If necessary, an overload relay for heavy starting must be selected where long starting times are involved. PTC sensors are recommended.


In the motor feeder between the SIRIUS 3RW soft starter and the motor, no capacitive elements are permitted (e. g. no reactive-power compensation equipment). In addition, neither static systems for reactive-power compensation nor dynamic PFC (Power Factor Correction) must be operated in parallel during starting and ramp-down of the soft starter. This is important to prevent faults arising on the compensation equipment and/or the soft starter.

All elements of the main circuit (such as fuses, controls and overload relays) should be dimensioned for direct starting, following the local short-circuit conditions. Fuses, controls and overload relays must be ordered separately. Please observe the maximum switching frequencies specified in the technical specifications.

Note:


When induction motors are switched on, voltage drops occur as a rule on starters of all types (direct starters, wye-delta starters, soft starters). The infeed transformer must always be dimensioned such that the voltage dip when starting the motor remains within the permissible tolerance. If the infeed transformer is dimensioned with only a small margin, it is best for the control voltage to be supplied from a separate circuit (independently of the main voltage) in order to avoid the potential switching off of the soft starter.

Schematic circuit diagram

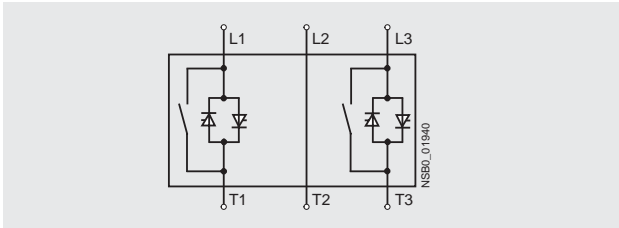

A bypass contact system is already integrated in the 3RW30 soft starter and therefore does not have to be ordered separately.

Status graphs

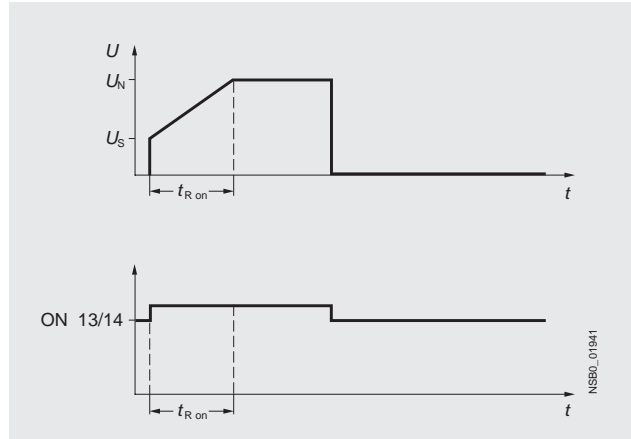

Win-Soft Starter selection and simulation program

With this software, you can simulate and select all Siemens soft starters, taking into account various parameters such as mains properties, motor and load data, and special application requirements.

The software is a valuable tool, which makes complicated, lengthy manual calculations for determining the required soft starters superfluous.

The Win-Soft Starter selection and simulation program can be downloaded from:

www.usa.siemens.com/softstarters > Software

More information can be found on the Internet at:

www.usa.siemens.com/softstarters

3RW Soft Starters

3RW40 for standard applications

Overview

SIRIUS 3RW40 soft starters have all the same advantages as the 3RW30 soft starters.

The SIRIUS 3RW40 soft starters are characterized above all by their small space requirements. Integrated bypass contacts mean that no power loss has to be taken into the bargain at the power semiconductors (thyristors) after the motor has started up. This cuts down on heat losses, enabling a more compact design and making external bypass circuits superfluous.

At the same time this soft starter comes with additional integrated functions such as adjustable current limiting, motor overload and intrinsic device protection, and optional thermistor motor protection. The higher the motor rating, the more important these functions become because they make it unnecessary to purchase and install protection equipment such as overload relays.

Internal intrinsic device protection prevents the thermal overloading of the thyristors and the power section defects this can cause. As an option the thyristors can also be protected by semiconductor fuses from short-circuiting.

Thanks to integrated status monitoring and fault monitoring, this compact soft starter offers many different diagnostics options. Up to four LEDs and relay outputs permit differentiated monitoring and diagnostics of the operating mechanism by indicating the operating state as well as for example mains or phase failure, missing load, non-permissible tripping time/class setting, thermal overloading or device faults.

Soft starters rated up to 300 Hp (at 460 V) for standard applications in three-phase networks are available. Extremely small sizes, low power losses and simple start-up are just three of the many advantages of the SIRIUS 3RW40 soft starters.

"Increased safety" type of protection EEx e according to ATEX directive 94/9/EC

The 3RW40 soft starter sizes S0 to S12 are suitable for the starting of explosion-proof motors with "increased safety" type of protection EEx e.

See "Appendix" -> "Standards and approvals" -> "Type overview of approved devices for potentially explosive areas (ATEX explosion protection)".

Function

The space required by the compact SIRIUS 3RW40 soft starter is often only about one third of that required by a contactor assembly for wye-delta starting of comparable rating. This not only saves space in the control cabinet and on the standard mounting rail but also does away completely with the wiring work needed for wye-delta starters. This is notable in particular for higher motor ratings which are only rarely available as fully wired solutions.

At the same time the number of cables from the starter to the motor is reduced from six to three. Compact dimensions, short start-up times, easy wiring and fast commissioning make themselves felt as clear-cut cost advantages.

The bypass contacts of these soft starters are protected during operation by an integrated solid-state arc quenching system. This prevents damage to the bypass contacts in the event of a fault, e. g. brief disconnection of the control voltage, mechanical shocks or life-related component defects on the coil operating mechanism or main contact spring.

The starting current of particularly powerful operating mechanisms can place an unjustifiable load on the local supply system. Soft starters reduce this starting current by means of their voltage ramp. Thanks to the adjustable current limiting, the SIRIUS 3RW40 soft starter takes even more pressure off the supply system. It leaves the set start ramp during the ramp-up – the ramp gradient is fixed by the starting voltage and the ramp time – as soon as the selected current limit is reached. From this moment the voltage of the soft starter is controlled so that the current supplied to the motor remains constant. This process is ended either by completion of the motor ramp-up or by tripping by the intrinsic device protection or the motor overload protection. As the result of this function the actual motor ramp-up can well take longer than the ramp time selected on the soft starter.

Thanks to the integrated motor overload protection according to IEC 60947-4-2 there is no need of an additional overload relay on the new soft starters. The rated motor current, the setting of the overload tripping time (Class times) and the reset of the motor overload protection function can be adjusted easily and quickly. Using a 4-step rotary potentiometer it is possible to set different overload tripping times on the soft starter. In addition to Class 10, 15 and 20 it is also possible to switch off the motor overload protection if a different motor management control device is to be used for this function, e. g. with connection to PROFIBUS.

Device versions with thermistor motor protection evaluation are available up to a rating of 55 kW (at 400 V). A "Thermoclick" measuring probe can be connected directly, as can a PTC of type A. Thermal overloading of the motor, open circuits and short-circuits in the sensor circuit all result in the direct disconnection of the soft starter. And if ever the soft starter trips, various reset options are available the same as with intrinsic device protection and motor load protection: manually with the reset button, automatically or remotely through brief disconnection of the control voltage.

The new series of devices comes with the "polarity balancing" control method, which is designed to prevent direct current components in two-phase controlled soft starters. On two-phase controlled soft starters the current resulting from superimposition of the two controlled phases flows in the uncontrolled phase. This results for physical reasons in an asymmetric distribution of the three phase currents during the motor ramp-up. This phenomenon cannot be influenced, but in most applications it is non-critical.

Controlling the power semiconductors results not only in this unbalance, however, but also in the previously mentioned direct current components which can cause severe noise generation on the motor at starting voltages of less than 50 %.

The control method used for these soft starters eliminates these direct current components during the ramp-up phase and prevents the braking torque which they can cause. It creates a motor ramp-up that is uniform in speed, torque and current rise, thus permitting a particularly gentle, two-phase starting of the motors. At the same time the acoustic quality of the starting operation comes close to the quality of a three-phase controlled soft starter. This is made possible by the on-going dynamic harmonizing and balancing of current half-waves of different polarity during the motor ramp-up. Hence the name "polarity balancing".

3RW Soft Starters

3RW40 for standard applications

As an option the thyristors can also be protected by SITOR semiconductor fuses from short-circuiting so that the soft starter is still functional after a short-circuit (type of coordination 2). Three LEDs are used to indicate the operating state as well as possible errors, e. g. non-permissible tripping time (CLASS setting), mains or phase failure, missing load, thermal overloading or device faults.

- Soft starting with voltage ramp; the starting voltage setting range U_s is 40 to 100 % and the ramp time t_R can be set from 0 to 20 s.³⁾
- Smooth ramp-down with voltage ramp; the running down time t_{off} can be set between 0 s to 20 s.³⁾
- Solid-state motor overload and intrinsic device protection
- Optional thermistor motor protection (up to size S3)
- Remote reset (integrated up to size S3, optional for size S6 and larger)
- Adjustable current limiting

- Integrated bypass contact system to minimize power loss
- Setting with potentiometers
- Simple mounting and commissioning
- Integrated status monitoring and fault monitoring
- Mains voltages 50/60 Hz, 200 to 600 V
- Various control voltage versions
 - Sizes S0 to S3: 24 V AC/DC and 110 to 230 V AC/DC
 - Sizes S6 to S12: 115 V AC and 230 V AC.
 Control by way of the internal 24 V DC supply and direct control by means of PLC are possible.
- Wide temperature range from -25 to +60 °C
- Built-in auxiliary contacts ensure user-friendly control and possible further processing within the system (for status graphs see page 7/69)

Technical specifications

| Type | 3RW40 2. | | 3RW40 3., 3RW40 4. | | | |
|---------------------------------|---------------------------|----------|---|---------------------|------------|---------------------|
| Control electronics | | | | | | |
| Rated values | Terminal A1/A2 | V | 24 ±20 | 110 ... 230 -15/+10 | 24 ±20 | 110 ... 230 -15/+10 |
| Rated control supply voltage | | % | | | | |
| • Tolerance | | | | | | |
| Rated control supply current | | mA | < 150 | < 50 | < 200 | < 50 |
| • STANDBY | | mA | < 200 | < 100 | < 5000 | < 1500 |
| • During pick-up | | mA | < 250 | < 50 | < 200 | < 50 |
| • ON without fan | | mA | < 300 | < 70 | < 250 | < 70 |
| • ON with fan | | mA | | | | |
| Rated frequency | | Hz | 50/60 | | | |
| • Tolerance | | % | ±10 | | | |
| Control inputs | | | | | | |
| IN | | | ON/OFF | | | |
| Rated operational current | | mA | Approx. 12 | 3/6 | Approx. 12 | 3/6 |
| • AC | | mA | Approx. 12 | 1.5/3 | Approx. 12 | 1.5/3 |
| • DC | | mA | | | | |
| Relay outputs | | | | | | |
| Output 1 | ON/RUN mode ¹⁾ | 13/14 | Operating indication (NO) | | | |
| Output 2 | BYPASSED | 23/24 | Bypass indication (NO) | | | |
| Output 3 | OVERLOAD/FAILURE | 95/96/98 | Overload/error indication (NC/NO) | | | |
| Rated operational current | | A | 3 AC-15/AC-14 at 230 V, 1 DC-13 at 24 V | | | |
| Protection against overvoltages | | A | Protection by means of varistor through contact | | | |
| Short-circuit protection | | | 4 A gL/gG operational class; 6 A quick (fuse is not included in scope of supply) | | | |

¹⁾ Factory default: ON mode.

| Type | 3RW40 5. | | 3RW40 7. | | | |
|---|---------------------------|----------|--|-----|-------------|-----|
| Control electronics | | | | | | |
| Rated values | Terminal A1/A2 | V AC | 115 -15/+10 | 230 | 115 -15/+10 | 230 |
| Rated control supply voltage | | % | | | | |
| • Tolerance | | | | | | |
| Rated control supply current STANDBY | | mA | 15 | | 15 | |
| Rated control supply current ON ¹⁾ | | mA | 440 | 200 | 660 | 360 |
| Rated frequency | | Hz | 50/60 | | 50/60 | |
| • Tolerance | | % | ±10 | | ±10 | |
| Control inputs | | | | | | |
| IN | | | ON/OFF | | | |
| Rated operational current | | mA | Approx. 10 acc. to DIN 19240 | | | |
| Rated operational voltage | | V DC | 24 from internal supply dc+ or external DC supply (acc. to DIN 19240) through terminals and IN | | | |
| Relay outputs | | | | | | |
| Output 1 | ON/RUN mode ²⁾ | 13/14 | Operating indication (NO) | | | |
| Output 2 | BYPASSED | 23/24 | Bypass indication (NO) | | | |
| Output 3 | OVERLOAD/FAILURE | 95/96/98 | Overload/error indication (NC/NO) | | | |
| Rated operational current | | A | 3 AC-15/AC-14 at 230 V, 1 DC-13 at 24 V | | | |
| Protection against overvoltages | | A | Protection by means of varistor through contact | | | |
| Short-circuit protection | | | 4 A gL/gG operational class; 6 A quick (fuse is not included in scope of supply) | | | |

¹⁾ Values for the coil power consumption at +10 % U_n , 50 Hz.

²⁾ Factory default: ON mode.

³⁾ Actual motor start times are load dependent.

3RW Soft Starters

3RW40 for standard applications

| Type | 3RW40 2., 3RW40 3., 3RW40 4. | | |
|---|------------------------------|-----------------|-------------------------------|
| Control electronics | | | |
| Operating indications | LEDs | DEVICE | STATE/BYPASSED/FAILURE |
| Off | | Green | Off |
| Start | | Green | Green flashing |
| Bypass | | Green | Green |
| Ramp-down | | Green | Green flashing |
| Alarm signals | | | OVERLOAD |
| I_e /Class setting not permissible | | Green | Red flashing |
| Start inhibited/thyristors too hot | | Yellow flashing | Off |
| Error signals | | | |
| • 24 V: $U < 0.75 \times U_s$ or $U > 1.25 \times U_s$ | | Off | Off |
| • 110 ... 230 V: $U < 0.75 \times U_s$ or $U > 1.15 \times U_s$ | | Off | Off |
| Non-permissible I_e /Class setting for edge 0 → 1 on input IN | | Green | Red flashing |
| Motor protection shut-down (overload thermistor) | | Green | Red |
| Thermistor defective (open circuit, short-circuit) | | Green | Red flickering |
| Thermal overloading of the thyristors | | Yellow | Off |
| Missing mains voltage, phase failure, missing load | | Green | Off |
| Device fault | | Red | Off |

| Type | 3RW40 5. and 3RW40 7. | | | |
|---|-----------------------|-----------------|-----------------------|-----------------|
| Control electronics | | | | |
| Operating indications | LEDs | DEVICE | STATE/BYPASSED | FAILURE |
| Off | | Green | Off | Off |
| Start | | Green | Green flashing | Off |
| Bypass | | Green | Green | Off |
| Ramp-down | | Green | Green flashing | Off |
| Alarm signals | | | | OVERLOAD |
| I_e /Class setting not permissible | | Green | Not relevant | Red flashing |
| Start inhibited/thyristors too hot | | Yellow flashing | Not relevant | Off |
| Error signals | | | | |
| $U < 0.75 \times U_s$ or $U > 1.15 \times U_s$ | | Off | Off | Red |
| Non-permissible I_e /Class setting for edge 0 → 1 on input IN | | Green | Off | Red flashing |
| Motor protection shut-down | | Green | Off | Red |
| Thermal overloading of the thyristors | | Yellow | Off | Off |
| Missing mains voltage, phase failure, missing load | | Green | Off | Off |
| Device fault | | Red | Off | Off |

3RW Soft Starters

| Type | 3RW40 .. | | | Factory default |
|--|---------------|---|--|--------------------|
| Protection functions | | | | |
| Motor protection functions | | | | |
| Trips in the event of | | Thermal overloading of the motor | | |
| Trip class to IEC 60947-4-1 | Class | 10/15/20 | | 10 |
| Phase failure sensitivity | % | > 40 | | |
| Overload warning | | No | | |
| Thermistor protection acc. to IEC 60947-8, type A/IEC 60947-5-1 | | Yes ¹⁾ | | |
| Reset option after tripping | | Manual/automatic/remote reset ²⁾ | | |
| | | (MAN/AUTO/REMOTE ²⁾) | | |
| Recovery time | min | 5 | | |
| Device protection functions | | | | |
| Trips in the event of | | Thermal overloading of the thyristors or bypass ³⁾ | | |
| Reset option after tripping | | Manual/automatic/remote reset ²⁾ | | |
| | | (MAN/AUTO/REMOTE ²⁾) | | |
| Recovery time | | | | |
| • During overloading of the thyristors | s | 30 | | |
| • During overloading of the bypass | s | 60 | | |
| Control times and parameters | | | | |
| Control times | | | | |
| Closing time (with connected control voltage) | ms | < 50 | | |
| Closing time (automatic/mains contactor mode) | ms | <300 | | |
| Recovery time (closing command in active ramp-down) | ms | 100 | | |
| Mains failure bridging time | | | | |
| Control supply voltage | ms | 50 | | |
| Mains failure response time | | | | |
| Load circuit | ms | 500 | | |
| Reclosing lockout after overload trip | | | | |
| Motor protection trip | min | 5 | | |
| Device protection trip | | | | |
| • During overloading of the thyristors | s | 30 | | |
| • During overloading of the bypass | s | 60 | | |
| Starting parameters | | | | |
| Starting time | s | 0 ... 20 | | 7.5 |
| Starting voltage | % | 40 ... 100 | | 40 |
| Starting current limit | | 1.3 ... 5 x I _e | | 5 x I _e |
| Ramp-down parameters | | | | |
| Ramp-down time | s | 0 ... 20 | | 0 |
| Reset mode parameters (for motor/device protection shut-down) | | | | |
| Manual reset | LEDs | Off | | Off |
| Automatic reset | LEDs | Yellow | | |
| Remote reset (REMOTE) ²⁾ | LEDs | Green | | |
| Start-up detection | | | | |
| | | Yes | | |
| Operating mode output 13/14 | | | | |
| Rising edge at | Start command | | | |
| Falling edge at | Off command | | | |
| | Ramp-down end | ON | | ON |
| | | RUN | | |



¹⁾ Optional up to size S3 (device variant).

²⁾ Integrated remote reset (REMOTE) available only for 3RW40 2. to 3RW40 4.; remote reset with 3RU19 accessory module available for 3RW40 5. and 3RW40 7..

³⁾ Bypass protection up to size S3.

3RW Soft Starters

3RW40 for standard applications

| Type | | 3RW40 2.-..B.4, 3RW40 3.-..B.4, 3RW40 4.-..B.4 | 3RW40 2.-..B.5, 3RW40 3.-..B.5, 3RW40 4.-..B.5 | 3RW40 5.-..BB.4, 3RW40 7.-..BB.4 | 3RW40 5.-..BB.5, 3RW40 7.-..BB.5 |
|--|------|--|--|-------------------------------------|-------------------------------------|
| Power electronics | | | | | |
| Rated operational voltage | V AC | 200 ... 480 | 400 ... 600 | 200 ... 460 | 400 ... 600 |
| Tolerance | % | -15/+10 | -15/+10 | -15/+10 | -15/+10 |
| Maximum blocking voltage (thyristor) | V AC | 1600 | | 1400 | 1800 |
| Rated frequency | Hz | 50/60 | | | |
| Tolerance | % | ±10 | | | |
| Uninterrupted duty at 40 °C (% of I_e) | % | 115 | | | |
| Minimum load (% of minimum selectable rated motor current I_M) | % | 20 (at least 2 A) | | | |
| Maximum cable length between soft starter and motor | m | 300 | | | |
| Permissible installation height | m | 5000 (derating from 1000, see characteristic curves); higher on request | | | |
| Permissible mounting position | | | | | |
| <ul style="list-style-type: none"> With auxiliary fan (for 3RW40 2. ... 3RW40 4.)  | | | | | |
| <ul style="list-style-type: none"> Without auxiliary fan (for 3RW40 2. ... 3RW40 4.)  | | | | | |
| -- (fan integrated in the soft starter) | | | | | |
| Permissible ambient temperature | | | | | |
| Operation | °C | -25 ... +60; (derating from +40) | | | |
| Storage | °C | -40 ... +80 | | | |
| Degree of protection | | | | | |
| IP20 for 3RW40 2.; | | | | IP00 | |
| IP00 for 3RW40 3. and 3RW40 4. | | | | | |

| Type | | 3RW40 24 | 3RW40 26 | 3RW40 27 | 3RW40 28 |
|--|-----|------------|------------|------------|----------|
| Power electronics | | | | | |
| 40 °C/50 °C/60 °C | | | | | |
| Load rating with rated operational current I_e | | | | | |
| <ul style="list-style-type: none"> Acc. to IEC and UL/CSA¹⁾, for individual mounting at 40/50/60 °C, AC-53a | A | 12.5/11/10 | 25.3/23/21 | 32.2/29/26 | 38/34/31 |
| Smallest adjustable rated motor current I_M | | | | | |
| For the motor overload protection | A | 5 | 10 | 17 | 23 |
| Power loss | | | | | |
| <ul style="list-style-type: none"> In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 2 | 8 | 13 | 19 |
| <ul style="list-style-type: none"> During starting with 300 % I_M (40°C) | W | 17 | 47 | 55 | 64 |
| Permissible rated motor current and starts per hour | | | | | |
| • Normal starting (Class 10) | | | | | |
| - Rated motor current I_M ²⁾ , starting time 3 s | A | 12.5/11/10 | 25.3/23/21 | 32.2/29/26 | 38/34/31 |
| - Starts per hour ³⁾ | 1/h | 50 | 23 | 23 | 19 |
| - Rated motor current I_M ²⁾⁴⁾ , starting time 4 s | A | 12.5/11/10 | 25.3/23/21 | 32.2/29/26 | 38/34/31 |
| - Starts per hour ³⁾ | 1/h | 36 | 15 | 16 | 12 |
| • Normal starting (Class 15) | | | | | |
| - Rated motor current I_M ²⁾ , starting time 4.5 s | A | 11/10/9 | 25.3/23/21 | 32.2/29/26 | 38/34/31 |
| - Starts per hour ³⁾ | 1/h | 49 | 21 | 18 | 18 |
| - Rated motor current I_M ²⁾⁴⁾ , starting time 6 s | A | 11/10/9 | 25.3/23/21 | 32.2/29/26 | 38/34/31 |
| - Starts per hour ³⁾ | 1/h | 36 | 14 | 13 | 13 |
| • Normal starting (Class 20) | | | | | |
| - Rated motor current I_M ²⁾ , starting time 6 s | A | 10/9/8 | 21/19/17 | 27/24/21 | 31/28/25 |
| - Starts per hour ³⁾ | 1/h | 47 | 21 | 20 | 18 |
| - Rated motor current I_M ²⁾⁴⁾ , starting time 8 s | A | 10/9/8 | 21/19/17 | 27/24/21 | 31/28/25 |
| - Starts per hour ³⁾ | 1/h | 34 | 15 | 14 | 13 |

1) Measurement at 60 °C according to UL/CSA not required.

2) With 300 % I_M .

3) For intermittent duty S4 with ON period = 30 %, $T_u = 40$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.

4) Maximum adjustable rated motor current I_M , dependent on CLASS setting.

3RW Soft Starters

3RW40 for standard applications

| Type | | 3RW40 36 | 3RW40 37 | 3RW40 38 | 3RW40 46 | 3RW40 47 |
|--|-----|-------------------|----------|----------|----------|-----------|
| Power electronics | | 40 °C/50 °C/60 °C | | | | |
| Load rating with rated operational current I_e | | | | | | |
| • Acc. to IEC and UL/CSA ¹⁾ , for individual mounting at 40/50/60 °C, AC-53a | A | 45/42/39 | 63/58/53 | 72/63/60 | 80/73/66 | 106/98/90 |
| Smallest adjustable rated motor current I_M | | | | | | |
| For the motor overload protection | A | 23 | 26 | 35 | 43 | 46 |
| Power loss | | | | | | |
| • In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 6 | 12 | 15 | 12 | 21 |
| • During starting with 300 % I_M (40°C) | W | 79 | 111 | 125 | 144 | 192 |
| Permissible rated motor current and starts per hour | | | | | | |
| • Normal starting (Class 10) | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 3 s | A | 45/42/39 | 63/58/53 | 72/63/60 | 80/73/66 | 106/98/90 |
| - Starts per hour ³⁾ | 1/h | 38 | 23 | 22 | 22 | 15 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 4 s | A | 45/42/39 | 63/58/53 | 72/63/60 | 80/73/66 | 106/98/90 |
| - Starts per hour ³⁾ | 1/h | 26 | 15 | 15 | 15 | 10 |
| • Normal starting (Class 15) | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 4.5 s | A | 42/38/34 | 50/46/42 | 56/52/46 | 70/64/58 | 84/77/70 |
| - Starts per hour ³⁾ | 1/h | 30 | 34 | 34 | 24 | 23 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 6 s | A | 42/38/34 | 50/46/42 | 56/52/46 | 70/64/58 | 84/77/70 |
| - Starts per hour ³⁾ | 1/h | 21 | 24 | 24 | 16 | 17 |
| • Normal starting (Class 20) | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 6 s | A | 38/34/30 | 46/42/38 | 50/46/42 | 64/58/52 | 77/70/63 |
| - Starts per hour ³⁾ | 1/h | 30 | 31 | 34 | 23 | 23 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 8 s | A | 38/34/30 | 46/42/38 | 50/46/42 | 64/58/52 | 77/70/63 |
| - Starts per hour ³⁾ | 1/h | 21 | 22 | 24 | 16 | 16 |




- 1) Measurement at 60 °C according to UL/CSA not required.
 2) With 300 % I_M .
 3) For intermittent duty S4 with ON period = 30 %, $T_U = 40$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.
 4) Maximum adjustable rated motor current I_M , dependent on CLASS setting.

| Type | | 3RW40 55 | 3RW40 56 | 3RW40 73 | 3RW40 74 | 3RW40 75 | 3RW40 76 |
|--|-----|-------------------|-------------|-------------|-------------|-------------|-------------|
| Power electronics | | 40 °C/50 °C/60 °C | | | | | |
| Load rating with rated operational current I_e | | | | | | | |
| • Acc. to IEC and UL/CSA ¹⁾ , for individual mounting at 40/50/60 °C, AC-53a | A | 134/117/100 | 162/145/125 | 230/205/180 | 280/248/215 | 356/315/280 | 432/385/335 |
| Smallest adjustable rated motor current I_M | | | | | | | |
| For the motor overload protection | A | 59 | 87 | 80 | 130 | 131 | 207 |
| Power loss | | | | | | | |
| • In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 60 | 75 | 75 | 90 | 125 | 165 |
| • During starting with 300 % ²⁾ I_M (40°C) | W | 1043 | 1355 | 2448 | 3257 | 3277 | 3600 |
| Permissible rated motor current and starts per hour | | | | | | | |
| • Normal starting (Class 10) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 10 s | A | 134/117/100 | 162/145/125 | 230/205/180 | 280/248/215 | 356/315/280 | 432/385/335 |
| - Starts per hour ³⁾ | 1/h | 20 | 8 | 20 | 20 | 16 | 17 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 20 s | A | 134/117/100 | 162/145/125 | 230/205/180 | 280/248/215 | 356/315/280 | 432/385/335 |
| - Starts per hour ³⁾ | 1/h | 7 | 1.4 | 9 | 8 | 5 | 5 |
| • Normal starting (Class 15) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 15 s | A | 134/117/100 | 152/140/125 | 210/200/180 | 250/220/190 | 341/315/280 | 402/385/335 |
| - Starts per hour ³⁾ | 1/h | 11 | 8 | 11 | 13 | 11 | 12 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 30 s | A | 134/117/100 | 152/140/125 | 210/200/180 | 250/220/190 | 341/315/280 | 402/385/335 |
| - Starts per hour ³⁾ | 1/h | 1.2 | 1.7 | 1 | 6 | 2 | 2 |
| • Normal starting (Class 20) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 20 s | A | 124/112/100 | 142/132/120 | 200/185/168 | 230/205/180 | 311/280/250 | 372/340/305 |
| - Starts per hour ³⁾ | 1/h | 12 | 9 | 10 | 10 | 10 | 10 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 40 s | A | 124/112/100 | 142/132/120 | 200/185/168 | 230/205/180 | 311/280/250 | 372/340/305 |
| - Starts per hour ³⁾ | 1/h | 3 | 3 | 1 | 5 | 1 | 1 |

- 1) Measurement at 60 °C according to UL/CSA not required.
 2) With 300 % I_M .
 3) For intermittent duty S4 with ON period = 30 %, $T_U = 40$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.
 4) Maximum adjustable rated motor current I_M , dependent on CLASS setting.







3RW Soft Starters

3RW40 for standard applications

| Soft starters | Type | | 3RW40 2. | 3RW40 3. | 3RW40 4. |
|---|---|-----------------|---|-------------------------------------|-------------------------------------|
| Conductor cross-sections | | | | | |
| Screw terminals | | | | | |
| Front clamping point connected | | | | | |
|  NSB00479 | • Solid | mm ² | 2 x (1.5 ... 2.5); 2 x (2.5 ... 6) acc. to IEC 60947; max. 1 x 10 | 2 x (1.5 ... 16) | 2 x (2.5 ... 16) |
| | • With end sleeve | mm ² | 2 x (1.5 ... 2.5); 2 x (2.5 ... 6) | 1 x (0.75 ... 25) | 1 x (2.5 ... 35) |
| | • Stranded | mm ² | -- | 1 x (0.75 ... 35) | 1 x (4 ... 70) |
| | • AWG cables | | | | |
| | - Solid | AWG | 2 x (16 ... 12) | | |
| Rear clamping point connected | | | | | |
|  NSB00480 | • Solid | mm ² | -- | 2 x (1.5 ... 16) | 2 x (2.5 ... 16) |
| | • With end sleeve | mm ² | -- | 1 x (1.5 ... 25) | 1 x (2.5 ... 50) |
| | • Stranded | mm ² | -- | 1 x (1.5 ... 35) | 1 x (10 ... 70) |
| | • AWG cables | | | | |
| | - Solid or stranded | AWG | -- | 1 x (16 ... 2) | 2 x (10 ... 1/0) |
| Both clamping points connected | | | | | |
|  NSB00481 | • Solid | mm ² | -- | 2 x (1.5 ... 16) | 2 x (2.5 ... 16) |
| | • With end sleeve | mm ² | -- | 2 x (1.5 ... 16) | 2 x (2.5 ... 35) |
| | • Stranded | mm ² | -- | 2 x (1.5 ... 25) | 2 x (10 ... 50) |
| | • AWG cables | | | | |
| | - Solid or stranded | AWG | -- | 2 x (16 ... 2) | 1 x (10 ... 2/0) |
| | • Tightening torque | NM lb.in | 2 ... 2.5 18 ... 22 | 4.5 40 | 6.5 58 |
| | Tools | | PZ 2 | PZ 2 | Allen screw 4 mm |
| | Degree of protection | | IP20 | IP20 (IP00 terminal compartment) | IP20 (IP00 terminal compartment) |
| Spring-type terminals | | | | | |
| Main conductors | | | | | |
| | • Solid | mm ² | 1 ... 10 | -- | |
| | • Finely stranded with end sleeve | mm ² | 1 ... 6 end sleeves without plastic collar | -- | |
| | • AWG cables | | | | |
| | - Solid or stranded (finely stranded) | AWG | 16 ... 10 | -- | |
| | - Stranded | AWG | 1 x 8 | -- | |
| | Tools | | DIN ISO 2380-1A0; 5 x 3 | -- | |
| | Degree of protection | | IP20 | -- | |
| Busbar connections | | | | | |
| Main conductors | | | | | |
| | • With cable lug acc. to DIN 46234 or max. 20 mm wide | | | | |
| | - Stranded | mm ² | -- | | 2 x (10 ... 70) |
| | - Finely stranded | mm ² | -- | | 2 x (10 ... 50) |
| | • AWG cables, solid or stranded | AWG | -- | | 2 x (7 ... 1/0) |

3RW Soft Starters

3RW40 for standard applications

| Soft starters | Type | | 3RW40 5. | 3RW40 7. |
|---|--|---|---|--|
| Conductor cross-sections | | | | |
| Screw terminals | Main conductors | | | |
| With box terminal | | | 3RT19 55-4G (55 kW) | 3RT19 66-4G |
| Front clamping point connected | <ul style="list-style-type: none"> • Finely stranded with end sleeve • Finely stranded without end sleeve • Stranded • Ribbon cable conductors (number x width x thickness) • AWG cables, solid or stranded | mm ² mm ² mm ² mm AWG | 16 ... 70 16 ... 70 16 ... 70 Min. 3 x 9 x 0.8 Max. 6 x 15.5 x 0.8 6 ... 2/0 | 70 ... 240 70 ... 240 95 ... 300 Min. 6 x 9 x 0.8 Max. 20 x 24 x 0.5 3/0 ... 600 kcmil |
|  | | | | |
| Rear clamping point connected | <ul style="list-style-type: none"> • Finely stranded with end sleeve • Finely stranded without end sleeve • Stranded • Ribbon cable conductors (number x width x thickness) • AWG cables, solid or stranded | mm ² mm ² mm ² mm AWG | 16 ... 70 16 ... 70 16 ... 70 Min. 3 x 9 x 0.8 Max. 6 x 15.5 x 0.8 6 ... 2/0 | 120 ... 185 120 ... 185 120 ... 240 Min. 6 x 9 x 0.8 Max. 20 x 24 x 0.5 250 ... 500 kcmil |
|  | | | | |
| Both clamping points connected | <ul style="list-style-type: none"> • Finely stranded with end sleeve • Finely stranded without end sleeve • Stranded • Ribbon cable conductors (number x width x thickness) • AWG cables, solid or stranded • Terminal screws - Tightening torque | mm ² mm ² mm ² mm AWG NM lb.in | Max. 1 x 50, 1 x 70 Max. 1 x 50, 1 x 70 Max. 2 x 70 Max. 2 x (6 x 15.5 x 0.8) Max. 2 x 1/0 M10 (hexagon socket, A/F4) 10 ... 12 90 ... 110 | Min. 2 x 50; max. 2 x 185 Min. 2 x 50; max. 2 x 185 Max. 2 x 70; max. 2 x 240 Max. 2 x (20 x 24 x 0.5) Min. 2 x 2/0 Max. 2 x 500 kcmil M12 (hexagon socket, A/F5) 20 ... 22 180 ... 195 |
|  | | | | |
| Screw terminals | Main conductors | | | |
| With box terminal | | | 3RT19 56-4G | |
| Front or rear clamping point connected | <ul style="list-style-type: none"> • Finely stranded with end sleeve • Finely stranded without end sleeve • Stranded • Ribbon cable conductors (number x width x thickness) • AWG cables, solid or stranded | mm ² mm ² mm ² mm AWG | 16 ... 120 16 ... 120 16 ... 120 Min. 3 x 9 x 0.8 Max. 6 x 15.5 x 0.8 6 ... 250 kcmil | |
|   | | | | |
| Both clamping points connected | <ul style="list-style-type: none"> • Finely stranded with end sleeve • Finely stranded without end sleeve • Stranded • Ribbon cable conductors (number x width x thickness) • AWG cables, solid or stranded | mm ² mm ² mm ² mm AWG | Max. 1 x 95, 1 x 120 Max. 1 x 95, 1 x 120 Max. 2 x 120 Max. 2 x (10 x 15.5 x 0.8) Max. 2 x 3/0 | |
|  | | | | |
| Screw terminals | Main conductors | | | |
| | <u>Without box terminal/busbar connection</u> | | | |
| | <ul style="list-style-type: none"> • Finely stranded with cable lug • Stranded with cable lug • AWG cables, solid or stranded • Connecting bar (max. width) • Terminal screws - Tightening torque | mm ² mm ² AWG mm NM lb.in | 16 ... 95 ¹⁾ 25 ... 120 ¹⁾ 4 ... 250 kcmil 17 M8 x 25 (A/F13) 10 ... 14 89 ... 124 | 50 ... 240 ²⁾ 70 ... 240 ²⁾ 2/0 ... 500 kcmil 25 M10 x 30 (A/F17) 14 ... 24 124 ... 210 |
| | | | | |

¹⁾ When connecting cable lugs to DIN 46235, use 3RT19 56-4EA1 terminal cover for conductor cross-sections from 95 mm² to ensure phase spacing.

²⁾ When connecting cable lugs to DIN 46234, the 3RT19 66-4EA1 terminal cover must be used for cond. cross-sections of 240 mm² and more as well as DIN 46235 for cond. cross-sections of 185 mm² and more to keep the phase clearance.

| Soft starters | Type | | 3RW40 .. |
|---|--|---|---|
| Conductor cross-sections | | | |
| Auxiliary conductors (1 or 2 conductors can be connected): | | | |
| | Screw terminals | | |
| | <ul style="list-style-type: none"> • Solid • Finely stranded with end sleeve • AWG cables - Solid or stranded - Finely stranded with end sleeve • Terminal screws - Tightening torque | mm ² mm ² AWG AWG NM lb.in | 2 x (0.5 ... 2.5) 2 x (0.5 ... 1.5) 2 x (20 ... 14) 2 x (20 ... 16) 0.8 ... 1.2 7 ... 10.3 |
| | Spring-type terminals | | |
| | <ul style="list-style-type: none"> • Solid - 3RW40 2. ... 3RW40 4. - 3RW40 5., 3RW40 7. • Finely stranded with end sleeve • AWG cables, solid or stranded | mm ² mm ² mm ² AWG | 2 x (0.25 ... 2.5) 2 x (0.25 ... 1.5) 2 x (0.25 ... 1.5) 2 x (24 ... 14) for 3RW40 2. ... 3RW40 4.; 2 x (24 ... 16) for 3RW40 5. and 3RW40 7. |

3RW Soft Starters

| | Standard | Parameters |
|---|--|--|
| Electromagnetic compatibility acc. to EN 60947-4-2 | | |
| EMC interference immunity | | |
| Electrostatic discharge (ESD) | EN 61000-4-2 | ±4 kV contact discharge, ±8 kV air discharge |
| Electromagnetic RF fields | EN 61000-4-3 | Frequency range: 80 ... 1000 MHz with 80 % at 1 kHz Degree of severity 3: 10 V/m |
| Conducted RF interference | EN 61000-4-6 | Frequency range: 150 kHz ... 80 MHz with 80 % at 1 kHz Interference 10 V |
| RF voltages and RF currents on cables | | |
| • Burst | EN 61000-4-4 | ±2 kV/5 kHz |
| • Surge | EN 61000-4-5 | ±1 kV line to line ±2 kV line to earth |
| EMC interference emission | | |
| EMC interference field strength | EN 55011 | Limit value of Class A at 30 ... 1000 MHz, limit value of Class B with 3RW40 2., 24 V AC/DC |
| Radio interference voltage | EN 55011 | Limit value of Class A at 0.15 ... 30 MHz, limit value of Class B with 3RW40 2., 24 V AC/DC |
| Radio interference suppression filters | | |
| Degree of noise suppression A (industrial applications) | Not required | |
| Degree of noise suppression B (applications for residential areas) Control voltage • 110 ... 230 V AC/DC • 115/230 V AC • 24 V AC/DC | Not available ¹⁾ Not available ¹⁾ Not required for 3RW40 2.; required for 3RW40 3. and 3RW40 4. (see table) | |

¹⁾ Degree of noise suppression B cannot be obtained through the use of filters as the strength of the electromagnetic field is not attenuated by the filter.

| Soft starter type | Rated current Soft starters A | Recommended filters ¹⁾ | | |
|-------------------|-------------------------------------|-----------------------------------|----------------------------|------------------------------|
| | | Voltage range 200 ... 480 V | | |
| | | Filter type | Rated current filters A | Terminals mm ² |
| 3RW40 36 | 45 | 4EF1512-1AA10 | 50 | 16 |
| 3RW40 37 | 63 | 4EF1512-2AA10 | 66 | 25 |
| 3RW40 38 | 72 | 4EF1512-3AA10 | 90 | 25 |
| 3RW40 46 | 80 | 4EF1512-3AA10 | 90 | 25 |
| 3RW40 47 | 106 | 4EF1512-4AA10 | 120 | 50 |

¹⁾ The radio interference suppression filter is used to remove the conducted interference from the main circuit. The field-related emissions comply with degree of noise suppression B. Filter selection applies under standard conditions: 10 starts per hour, start time 4 s at 300 % I_e.

| Type Number | Max. Fuse Class K5, RK5, RK1 | Max. Fuse Class J | Short Voltage Circuit | Voltage |
|---|------------------------------|-------------------|-----------------------|---------|
| Standard short circuit ratings 3RW40 | | | | |
| 3RW40 24 | 50 A | 60 A | 5 kA | 600 V |
| 3RW40 26 | 100 A | 100 A | 5 kA | 600 V |
| 3RW40 27 | 125 A | 125 A | 5 kA | 600 V |
| 3RW40 28 | 125 A | 125 A | 5 kA | 600 V |
| 3RW40 36 | 175 A | 175 A | 10 kA | 600 V |
| 3RW40 37 | 250 A | 250 A | 10 kA | 600 V |
| 3RW40 38 | 250 A | 250 A | 10 kA | 600 V |
| 3RW40 46 | 450 A ¹⁾ | 300 A | 10 kA | 600 V |
| 3RW40 47 | 450 A ¹⁾ | 350 A | 10 kA | 600 V |

¹⁾ Special purpose fuse Type 3N81333-2 manufactured by Siemens covered in File E167357.

High capacity short circuit ratings 3RW40

| | | | | |
|----------|-------|-------|-------|-------|
| 3RW40 24 | 50 A | 50 A | 42 kA | 600 V |
| 3RW40 26 | 60 A | 100 A | 42 kA | 600 V |
| 3RW40 27 | 60 A | 125 A | 42 kA | 600 V |
| 3RW40 28 | 60 A | 125 A | 42 kA | 600 V |
| 3RW40 36 | 100 A | 175 A | 30 kA | 600 V |
| 3RW40 37 | 100 A | 200 A | 30 kA | 600 V |
| 3RW40 38 | 100 A | 200 A | 30 kA | 600 V |
| 3RW40 46 | 110 A | 200 A | 42 kA | 600 V |
| 3RW40 47 | 110 A | 200 A | 42 kA | 600 V |

For solid-state motor controller, Type 3RW402: Applicable in an enclosure with minimum overall dimensions of 370 by 190 by 190 mm.

For solid-state motor controller, Type 3RW403: Applicable in an enclosure with minimum overall dimensions of 450 by 210 by 225 mm.

For solid-state motor controller, Type 3RW404: Applicable in an enclosure with minimum overall dimensions of 450 by 220 by 235 mm.


3RW Soft Starters

3RW40 for standard applications

Circuit Breaker SCCR

| TOC 1 | Circuit Breakers | | | | | | | | | | | | | | | | | | |
|----------|------------------|---------------|------------------|---------|-------------|--------------------|---------|-------------|------------|---------|-------------|------------|---------|-------------|------------|---------|-------------|-----|-----|
| | Q11 Type | Rated current | Thermal Magnetic | | | Instantaneous Trip | | | Fuse | | | Fuse | | | | | | | |
| | | | 480 V Type | SCCR kA | Max. size A | 600 V Type | SCCR kA | Max. size A | 480 V Type | SCCR kA | Max. size A | 600 V Type | SCCR kA | Max. size A | 600 V Type | SCCR kA | Max. size A | | |
| 3RW40 24 | 11 | | | | | | | | | | | | | | | | | | |
| 3RW40 26 | 23 | | | | | | | | | | | | | | | | | | |
| 3RW40 27 | 29 | | | | | | | | | | | | | | | | | | |
| 3RW40 28 | 34 | | | | | | | | | | | | | | | | | | |
| 3RW40 36 | 42 | | | | | | | | | | | | | | | | | | |
| 3RW40 37 | 58 | | | | | | | | | | | | | | | | | | |
| 3RW40 38 | 62 | | | | | | | | | | | | | | | | | | |
| 3RW40 46 | 73 | | | | | | | | | | | | | | | | | | |
| 3RW40 47 | 98 | | | | | | | | | | | | | | | | | | |
| 3RW40 55 | 117 | FD63B | 100 | 150 | FD63B | 50 | 150 | FXD63A | 100 | 150 | FXD63A | 50 | 150 | RK5 | 100 | 200 | J | 100 | 400 |
| 3RW40 56 | 145 | JD63B | 100 | 200 | JD63B | 50 | 250 | FXD63A | 100 | 250 | FXD63A | 50 | 250 | RK5 | 100 | 250 | J | 100 | 500 |
| 3RW40 73 | 205 | JD63B | 100 | 300 | JD63B | 50 | 300 | JXD63A | 100 | 300 | JXD63A | 50 | 300 | RK5 | 100 | 250 | | | |
| 3RW40 74 | 248 | JD63B | 100 | 400 | JD63B | 50 | 400 | JXD63A | 100 | 400 | JXD63A | 50 | 400 | RK5 | 100 | 450 | | | |
| 3RW40 75 | 315 | LD63B | 100 | 500 | LD63B | 50 | 450 | JXD63A | 100 | 400 | JXD63A | 50 | 400 | RK5 | 100 | 600 | | | |
| 3RW40 76 | 385 | LD63B | 100 | 600 | LD63B | 50 | 600 | LXD63H | 100 | 600 | LXD63H | 50 | 600 | L | 100 | 700 | | | |

Fused version (line protection only)




| TOC 1 | Soft starters | | Line protection, maximum | | Line contactors |
|---|---------------|-----------------|--------------------------|-----------------|---------------------|
| | Q11 Type | Rated current A | F1 Type | Rated current A | Size (optional) Q21 |
| Type of coordination "1"¹⁾: I_q = 65 kA at 600 V +5 % | | | | | |
| 3RW40 24 | 12.5 | 3NA3 820-6 | 50 | 00 | 3RT10 24 |
| 3RW40 26 | 25 | 3NA3 822-6 | 63 | 00 | 3RT10 26 |
| 3RW40 27 | 32 | 3NA3 824-6 | 80 | 00 | 3RT10 34 |
| 3RW40 28 | 38 | 3NA3 824-6 | 80 | 00 | 3RT10 35 |
| 3RW40 36 | 45 | 3NA3 130-6 | 100 | 1 | 3RT10 36 |
| 3RW40 37 | 63 | 3NA3 132-6 | 125 | 1 | 3RT10 44 |
| 3RW40 38 | 72 | 3NA3 132-6 | 125 | 1 | 3RT10 45 |
| 3RW40 46 | 80 | 3NA3 136-6 | 160 | 1 | 3RT10 45 |
| 3RW40 47 | 106 | 3NA3 136-6 | 160 | 1 | 3RT10 46 |
| 3RW40 55 | 134 | 3NA3 244-6 | 250 | 2 | 3RT10 55-6A.36 |
| 3RW40 56 | 162 | 3NA3 244-6 | 250 | 2 | 3RT10 56-6A.36 |
| 3RW40 73 | 230 | 2 x 3NA3 354-6 | 2 x 355 | 3 | 3RT10 65-6A.36 |
| 3RW40 74 | 280 | 2 x 3NA3 354-6 | 2 x 355 | 3 | 3RT10 66-6A.36 |
| 3RW40 75 | 356 | 2 x 3NA3 365-6 | 2 x 500 | 3 | 3RT10 75-6A.36 |
| 3RW40 76 | 432 | 2 x 3NA3 365-6 | 2 x 500 | 3 | 3RT10 76-6A.36 |

¹⁾ The types of coordination are explained under "3RA1 Fuseless Load Feeders". The type of coordination "1" refers only to soft starters in combination with the stipulated protective device (motor starter protector/circuit breaker/fuse), not to any additional components in the feeder.

3RW Soft Starters

3RW40 for standard applications

Fused version with 3NE1 SITOR fuses (semiconductor and line protection)



For matching fuse bases see Catalog LV 1 under "SENTRON Switching and Protection Devices for Power Distribution" -> "Switch Disconnectors", and Catalog ET B1 under "BETA Protecting" -> "SITOR Semiconductor Fuses" or go to www.siemens.com/sitor -> "Products" -> "BETA Protecting" -> "SITOR"

| Soft starters ToC 2 | Rated current | All-range fuses | | | Line contactors | |
|---|---------------|-----------------|-----------------|------|-----------------|--|
| | | F'1 Type | Rated current A | Size | (optional) | |
| Q11 Type | A | F'1 Type | A | | Q21 | |
| Type of coordination "2"¹⁾: $I_q = 65 \text{ kA at } 600 \text{ V } +5 \%$ | | | | | | |
| 3RW40 24 | 12.5 | 3NE1 814-0 | 20 | 000 | 3RT10 24 | |
| 3RW40 26 | 25 | 3NE1 803-0 | 35 | 000 | 3RT10 26 | |
| 3RW40 27 | 32 | 3NE1 020-2 | 80 | 00 | 3RT10 34 | |
| 3RW40 28 | 38 | 3NE1 020-2 | 80 | 00 | 3RT10 35 | |
| 3RW40 36 | 45 | 3NE1 020-2 | 80 | 00 | 3RT10 36 | |
| 3RW40 37 | 63 | 3NE1 820-0 | 80 | 000 | 3RT10 44 | |
| 3RW40 38 | 72 | 3NE1 820-0 | 80 | 000 | 3RT10 45 | |
| 3RW40 46 | 80 | 3NE1 021-0 | 100 | 00 | 3RT10 45 | |
| 3RW40 47 | 106 | 3NE1 022-0 | 125 | 00 | 3RT10 46 | |
| 3RW40 55 | 134 | 3NE1 227-2 | 250 | 1 | 3RT10 55-6A.36 | |
| 3RW40 56 | 162 | 3NE1 227-2 | 250 | 1 | 3RT10 56-6A.36 | |
| 3RW40 73 | 230 | 3NE1 331-2 | 350 | 2 | 3RT10 65-6A.36 | |
| 3RW40 74 | 280 | 3NE1 333-2 | 450 | 2 | 3RT10 66-6A.36 | |
| 3RW40 75 | 356 | 3NE1 334-2 | 500 | 2 | 3RT10 75-6A.36 | |
| 3RW40 76 | 432 | 3NE1 435-2 | 560 | 3 | 3RT10 76-6A.36 | |

¹⁾ The types of coordination are explained in more detail under "3RA1 Fuseless Load Feeders".
The type of coordination "2" refers only to soft starters in combination with the stipulated protective device (circuit breaker/fuse), not to any additional components in the feeder.

ToC 1 Type of coordination "1"

ToC 2 Type of coordination "2"


The types of coordination are explained in more detail under "3RA1 Fuseless Load Feeders".

These types of coordination are indicated in the Technical specifications by gray backgrounds.

3RW Soft Starters

3RW40 for standard applications

Fused version with 3NE3 SITOR fuses (semiconductor protection by fuse, line and overload protection by motor starter protector; alternatively, installation with contactor and overload relay possible)

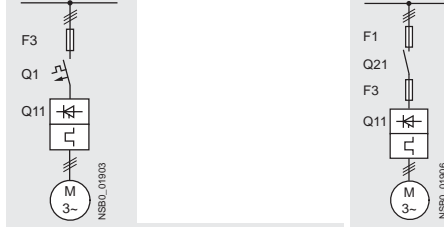

For matching fuse bases see Catalog LV 1 under "SENTRON Switching and Protection Devices for Power Distribution" -> "Switch Disconnectors", and Catalog ET B1 under "BETA Protecting" -> "SITOR Semiconductor Fuses" or go to www.siemens.com/sitor -> "Products" -> "BETA Protecting" -> "SITOR"

| Soft starters Q11 Type | Rated current A | Semiconductor fuses, minimum | | | Semiconductor fuses, maximum | | | Semiconductor fuses, minimum | | |
|------------------------------|--------------------|------------------------------|--------------------|------|------------------------------|--------------------|------|------------------------------|--------------------|------|
| | | F3 Type | Rated current A | Size | F3 Type | Rated current A | Size | F3 Type | Rated current A | Size |

| Type of coordination "2" ¹⁾ : I _q = 65 kA at 600 V +5 % | | | | | | | | | | |
|---|------|-------------|-----|----|------------|-----|----|----------|-----|----|
| 3RW40 24 | 12.5 | -- | -- | -- | -- | -- | -- | 3NE4 101 | 32 | 0 |
| 3RW40 26 | 25 | -- | -- | -- | 3NE3 221 | 100 | 1 | 3NE4 102 | 40 | 0 |
| 3RW40 27 | 32 | -- | -- | -- | 3NE3 224 | 160 | 1 | 3NE4 118 | 63 | 0 |
| 3RW40 28 | 38 | -- | -- | -- | 3NE3 224 | 160 | 1 | 3NE4 118 | 63 | 0 |
| 3RW40 36 | 45 | -- | -- | -- | 3NE3 224 | 160 | 1 | 3NE4 120 | 80 | 0 |
| 3RW40 37 | 63 | -- | -- | -- | 3NE3 225 | 200 | 1 | 3NE4 121 | 100 | 0 |
| 3RW40 38 | 72 | 3NE3 221 | 100 | 1 | 3NE3 227 | 250 | 1 | -- | -- | -- |
| 3RW40 46 | 80 | 3NE3 222 | 125 | 1 | 3NE3 225 | 200 | 1 | -- | -- | -- |
| 3RW40 47 | 106 | 3NE3 224 | 160 | 1 | 3NE3 231 | 350 | 1 | -- | -- | -- |
| 3RW40 55 | 134 | 3NE3 227 | 250 | 1 | 3NE3 335 | 560 | 2 | -- | -- | -- |
| 3RW40 56 | 162 | 3NE3 227 | 250 | 1 | 3NE3 335 | 560 | 2 | -- | -- | -- |
| 3RW40 73 | 230 | 3NE3 232-0B | 400 | 1 | 3NE3 333 | 450 | 2 | -- | -- | -- |
| 3RW40 74 | 280 | 3NE3 233 | 450 | 1 | 3NE3 336 | 630 | 2 | -- | -- | -- |
| 3RW40 75 | 356 | 3NE3 335 | 560 | 2 | 3NE3 336 | 630 | 2 | -- | -- | -- |
| 3RW40 76 | 432 | 3NE3 337-8 | 710 | 2 | 3NE3 340-8 | 900 | 2 | -- | -- | -- |

| Soft starters Q11 Type | Rated current A | Semiconductor fuses max. | | | Semiconductor fuses min. | | | Semiconductor fuses max. | | | Cylindrical fuses | |
|------------------------------|--------------------|--------------------------|--------------------|------|--------------------------|--------------------|------|--------------------------|--------------------|------|-------------------|--------------------|
| | | F3 Type | Rated current A | Size | F3 Type | Rated current A | Size | F3 Type | Rated current A | Size | F3 Type | Rated current A |

| Type of coordination "2" ¹⁾ : I _q = 65 kA at 600 V +5 % | | | | | | | | | | | | |
|---|------|----------|-----|----|------------|-----|----|------------|-----|----|----------|----|
| 3RW40 24 | 12.5 | 3NE4 117 | 50 | 0 | 3NE8 015-1 | 25 | 00 | 3NE8 017-1 | 50 | 00 | 3NC2 240 | 40 |
| 3RW40 26 | 25 | 3NE4 117 | 50 | 0 | 3NE8 017-1 | 50 | 00 | 3NE8 021-1 | 100 | 00 | 3NC2 263 | 63 |
| 3RW40 27 | 32 | 3NE4 118 | 63 | 0 | 3NE8 018-1 | 63 | 00 | 3NE8 022-1 | 125 | 00 | 3NC2 280 | 80 |
| 3RW40 28 | 38 | 3NE4 118 | 63 | 0 | 3NE8 020-1 | 80 | 00 | 3NE8 024-1 | 160 | 00 | 3NC2 280 | 80 |
| 3RW40 36 | 45 | 3NE4 120 | 80 | 0 | 3NE8 020-1 | 80 | 00 | 3NE8 024-1 | 160 | 00 | 3NC2 280 | 80 |
| 3RW40 37 | 63 | 3NE4 121 | 100 | 0 | 3NE8 021-1 | 100 | 00 | 3NE8 024-1 | 160 | 00 | -- | -- |
| 3RW40 38 | 72 | -- | -- | -- | 3NE8 022-1 | 125 | 00 | 3NE8 024-1 | 160 | 00 | -- | -- |
| 3RW40 46 | 80 | -- | -- | -- | 3NE8 022-1 | 125 | 00 | 3NE8 024-1 | 160 | 00 | -- | -- |
| 3RW40 47 | 106 | -- | -- | -- | 3NE8 024-1 | 160 | 00 | 3NE8 024-1 | 160 | 00 | -- | -- |
| 3RW40 55 | 134 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| 3RW40 56 | 162 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| 3RW40 73 | 230 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| 3RW40 74 | 280 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| 3RW40 75 | 356 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| 3RW40 76 | 432 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- |

| Soft starters Q11 Type | Rated current A | Line contactors | Motor starter protectors/circuit breakers | | | | Line protection, maximum | | |
|------------------------------|--------------------|-------------------|---|--------------------|---------------------------|--------------------|--------------------------|--------------------|------|
| | | (optional) Q21 | 400 V +10 % Q1 Type | Rated current A | 575 V +10 % Q1 Type | Rated current A | F1 Type | Rated current A | Size |

| Type of coordination "2" ¹⁾ : I _q = 65 kA at 600 V +5 % | | | | | | | | | |
|---|------|----------------|----------------|-----|----------|-----|----------------|---------|----|
| 3RW40 24 | 12.5 | 3RT10 24 | 3RV1 021-4KA10 | 55 | -- | -- | 3NA3 820-6 | 50 | 00 |
| 3RW40 26 | 25 | 3RT10 26 | 3RV1 021-4DA10 | 55 | -- | -- | 3NA3 822-6 | 63 | 00 |
| 3RW40 27 | 32 | 3RT10 34 | 3RV1 031-4EA10 | 55 | -- | -- | 3NA3 824-6 | 80 | 00 |
| 3RW40 28 | 38 | 3RT10 35 | 3RV1 031-4FA10 | 55 | -- | -- | 3NA3 824-6 | 80 | 00 |
| 3RW40 36 | 45 | 3RT10 36 | 3RV1 031-4GA10 | 20 | -- | -- | 3NA3 130-6 | 100 | 1 |
| 3RW40 37 | 63 | 3RT10 44 | 3RV1 041-4JA10 | 20 | -- | -- | 3NA3 132-6 | 125 | 1 |
| 3RW40 38 | 72 | 3RT10 45 | 3RV1 041-4KA10 | 20 | -- | -- | 3NA3 132-6 | 125 | 1 |
| 3RW40 46 | 80 | 3RT10 45 | 3RV1 041-4LA10 | 11 | -- | -- | 3NA3 136-6 | 160 | 1 |
| 3RW40 47 | 106 | 3RT10 46 | 3RV1 041-4MA10 | 11 | -- | -- | 3NA3 136-6 | 160 | 1 |
| 3RW40 55 | 134 | 3RT10 55-6A.36 | 3VL3 720 | 200 | 3VL3 720 | 200 | 3NA3 244-6 | 250 | 2 |
| 3RW40 56 | 162 | 3RT10 56-6A.36 | 3VL3 720 | 200 | 3VL3 720 | 200 | 3NA3 244-6 | 250 | 2 |
| 3RW40 73 | 230 | 3RT10 65-6A.36 | 3VL4 731 | 315 | 3VL5 731 | 315 | 2 x 3NA3 354-6 | 2 x 355 | 3 |
| 3RW40 74 | 280 | 3RT10 66-6A.36 | 3VL4 731 | 315 | 3VL5 731 | 315 | 2 x 3NA3 354-6 | 2 x 355 | 3 |
| 3RW40 75 | 356 | 3RT10 75-6A.36 | 3VL4 740 | 400 | 3VL5 740 | 400 | 2 x 3NA3 365-6 | 2 x 500 | 3 |
| 3RW40 76 | 432 | 3RT10 76-6A.36 | 3VL5 750 | 500 | 3VL5 750 | 500 | 2 x 3NA3 365-6 | 2 x 500 | 3 |

¹⁾ The types of coordination are explained under "3RA1 Fuseless Load Feeders". The type of coordination "2" refers only to soft starters in combination


with the stipulated protective device (motor starter protector/circuit breaker/fuse), not to any additional components in the feeder.

3RW Soft Starters


3RW40 for standard applications

Characteristic curves


Motor protection tripping characteristics for 3RW40 (with symmetry)

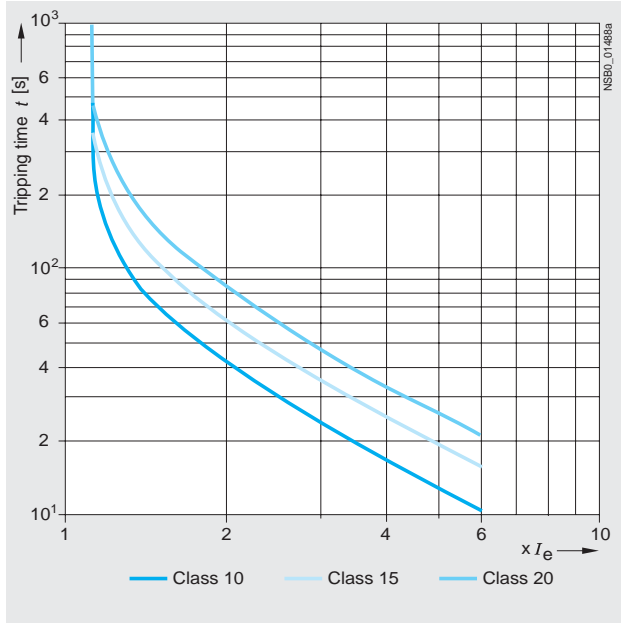

Motor protection tripping characteristics for 3RW40 (with asymmetry)

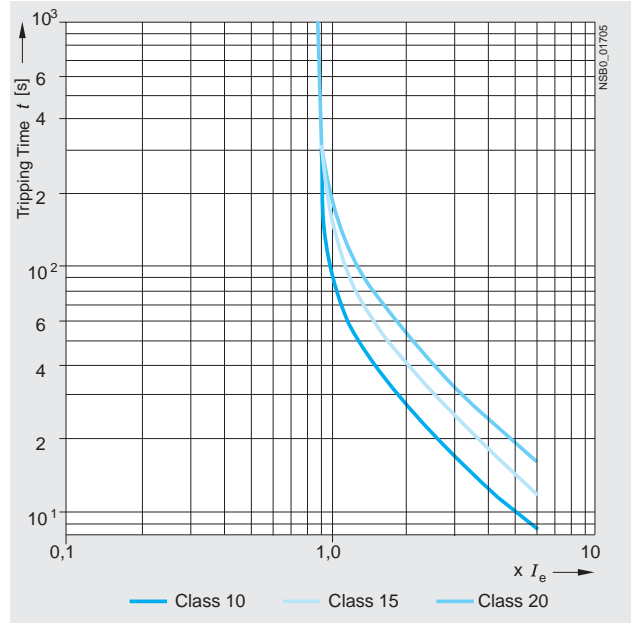

Permissible installation height

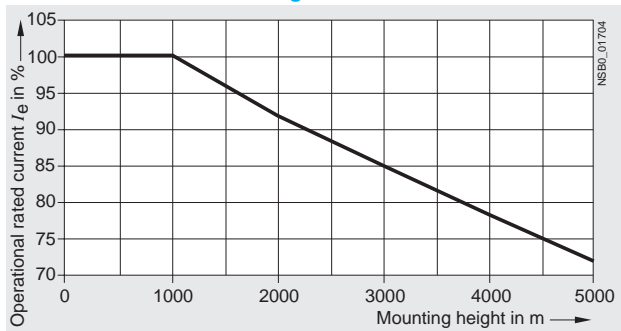

At an installation height above 2000 m, the max. permissible operational voltage is reduced to 460 V.

3RW Soft Starters

3RW40 for standard applications

More information

Application examples for normal starting (Class 10)

Normal starting Class 10 (up to 20 s with 350 % $I_{n, motor}$).

The soft starter rating can be selected to be as high as the rating of the motor used.

| Application | Conveyor belt | Roller conveyor | Small fan | Pump | Hydraulic pump |
|-------------------------------------|---------------|-----------------|----------------|----------------|----------------|
| Starting parameters | | | | | |
| • Voltage ramp and current limiting | | | | | |
| - Starting voltage | % | 70 | 60 | 40 | 40 |
| - Starting time | s | 10 | 10 | 10 | 10 |
| - Current limit value | | $5 \times I_M$ | $5 \times I_M$ | $4 \times I_M$ | $4 \times I_M$ |
| Ramp-down time | s | 5 | 5 | 0 | 10 |

Application examples for heavy starting (Class 20)

Heavy starting Class 20 (up to 40 s with 350 % $I_{n, motor}$).

The soft starter has to be selected at least one performance class higher than the motor used.

| Application | Stirrer | Compressor | Centrifuge |
|-------------------------------------|---------|----------------|----------------|
| Starting parameters | | | |
| • Voltage ramp and current limiting | | | |
| - Starting voltage | % | 40 | 50 |
| - Starting time | s | 20 | 10 |
| - Current limit value | | $4 \times I_M$ | $4 \times I_M$ |
| Ramp-down time | | 0 | 0 |

Note:

These tables present sample set values and device sizes. They are intended only for the purposes of information and are not binding. The set values depend on the application in question and must be optimized during commissioning.

The soft starter dimensions should be checked where necessary with the Win-Soft Starter software or with the help of Technical Assistance.

3RW Soft Starters

3RW40 for standard applications

Configuration

The 3RW solid-state soft starters are designed for easy starting conditions. In the event of deviating conditions or increased switching frequency, it may be necessary to choose a larger device. For accurate dimensioning, use the Win-Soft Starter selection and simulation program.

Where long starting times are involved, the integrated solid-state overload relay for heavy starting should not be disconnected. PTC sensors are recommended. This also applies for the smooth ramp-down because during the ramp-down time an additional current loading applies in contrast to free ramp-down.

In the case of high switching frequencies in S4 mode, Siemens recommends the use of PTC sensors. For corresponding device versions with integrated thermistor motor protection or separate thermistor evaluation devices see Catalog LV 1.


In the motor feeder between the SIRIUS 3RW soft starter and the motor, no capacitive elements are permitted (e. g. no reactive-power compensation equipment). In addition, neither static systems for reactive-power compensation nor dynamic PFC (Power Factor Correction) must be operated in parallel during starting and ramp-down of the soft starter. This is important to prevent faults arising on the compensation equipment and/or the soft starter.

All elements of the main circuit (such as fuses and controls) should be dimensioned for direct starting, following the local short-circuit conditions. Fuses, controls and overload relays must be ordered separately. Please observe the maximum switching frequencies specified in the technical specifications.

Note:


When induction motors are switched on, voltage drops occur as a rule on starters of all types (direct starters, wye-delta starters, soft starters). The infeed transformer must always be dimensioned such that the voltage dip when starting the motor remains within the permissible tolerance. If the infeed transformer is dimensioned with only a small margin, it is best for the control voltage to be supplied from a separate circuit (independently of the main voltage) in order to avoid the potential switching off of the soft starter.

Schematic circuit diagram

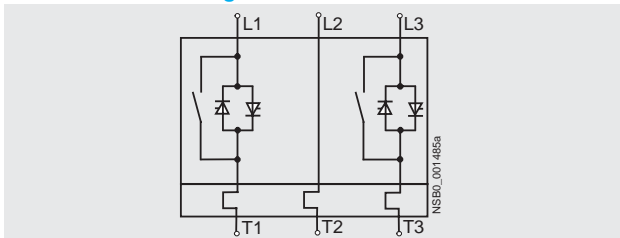

A bypass contact system and solid-state overload relay are already integrated in the 3RW40 soft starter and therefore do not have to be ordered separately.

Status graphs

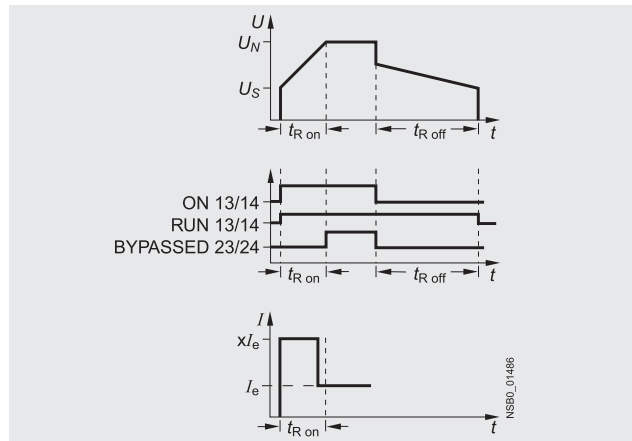

Win-Soft Starter selection and simulation program

With this software, you can simulate and select all Siemens soft starters, taking into account various parameters such as mains properties, motor and load data, and special application requirements.

The software is a valuable tool, which makes complicated, lengthy manual calculations for determining the required soft starters superfluous.

The Win-Soft Starter selection and simulation program can be downloaded from:

www.usa.siemens.com > Software

More information can be found on the Internet at:

www.usa.siemens.com.

3RW Soft Starters

3RW44 for high-feature applications

Overview

In addition to soft starting and soft ramp-down, the solid-state SIRIUS 3RW44 soft starters provide numerous functions for higher-level requirements. They cover a performance range up to 900 Hp (at 460 V) in the inline circuit and up to 1600 Hp (at 460 V) in the inside-delta circuit.

The SIRIUS 3RW44 soft starters are characterized by a compact design for space-saving and clearly arranged control cabinet layouts. For optimized motor starting and stopping the innovative SIRIUS 3RW44 soft starters are an attractive alternative with considerable savings potential compared to applications with a frequency converter. The new torque control and adjustable current limiting enable the High-Feature soft starters to be used in nearly every conceivable task. They reliably mitigate the sudden torque applications and current peaks during motor starting and stopping. This creates savings potential when calculating the size of the controlgear and when servicing the machinery installed. Be it for inline circuits or inside-delta circuits – the SIRIUS 3RW44 soft starter offers savings especially in terms of size and equipment costs.

The bypass contacts already integrated in the soft starter bypass the thyristors after a motor ramp-up is detected. This results in a further great reduction in the heat loss occurring during operation of the soft starter at rated value.

Combinations of various starting, operating and ramp-down possibilities ensure an optimum adaptation to the application-specific requirements. Operation and commissioning can be performed with the menu-controlled keypad and a menu-prompted, multi-line graphic display with background lighting. The optimized motor ramp-up and ramp-down can be effected quickly, easily and reliably by means of just a few settings with a previously selected language. Four-key operation and plain-text displays for each menu point guarantee full clarity at every moment of the parameterization and operation.

Applicable standards

- IEC 60947-4-2
- UL/CSA

Soft Starter ES parameterization software

Soft Starter ES software is used for the parameterization, monitoring and service diagnostics of SIRIUS 3RW44 High Feature soft starters.

See Catalog LV 1, Chapter 12 "Planning and Configuration with SIRIUS".

Function

Equipped with modern, ergonomic user prompting the SIRIUS 3RW44 soft starters can be commissioned quickly and easily using a keypad and a menu-prompted, multi-line graphic display with background lighting. The optimized motor ramp-up and ramp-down can be effected quickly, easily and reliably by means of just a few settings with a selectable language. Four-key operation and plain-text displays for each menu point guarantee full clarity at every moment of the parameterization and operation. During operation and when control voltage is applied, the display field continuously presents measured values and operating values as well as warnings and fault messages. An external display and operator module can be connected by means of a connection cable to the soft starter, thus enabling active indications and the like to be read directly from the control cabinet door.

The SIRIUS 3RW44 soft starters are equipped with optimum functionality. An integral bypass contact system reduces the power loss of the soft starter during operation. This reliably prevents heating of the switchgear environment. The SIRIUS 3RW44 soft starters have internal intrinsic device protection. This prevents thermal overloading of the power section's thyristors, e. g. due to unacceptably high closing operations.

Wiring outlay for installing an additional motor overload relay is no longer needed as the SIRIUS 3RW44 soft starters perform this function too. In addition they offer adjustable trip classes and a thermistor motor protection function. As an option the thyristors can also be protected by SITOR semiconductor fuses from short-circuiting so that the soft starter is still functional after a short-circuit (type of coordination 2). And even inrush current peaks are reliably avoided thanks to adjustable current limiting.

As a further option the SIRIUS 3RW44 soft starters can be upgraded with a PROFIBUS DP module. Thanks to their communication capability and their programmable control inputs and relay outputs the SIRIUS 3RW44 soft starters can be very easily and quickly integrated in higher-level controllers.

In addition a creep speed function is available for positioning and setting jobs. With this function the motor can be controlled in both directions of rotation with reduced torque and an adjustable, low speed.

On the other hand the SIRIUS 3RW44 soft starters offer a new, combined DC braking function for the fast stopping of driving loads.

Highlights

- Soft starting with breakaway pulse, torque control or voltage ramp, adjustable torque or current limiting as well as any combination of these, depending on load type
- Integrated bypass contact system to minimize power loss
- Various setting options for the starting parameters such as starting torque, starting voltage, ramp-up and ramp-down time, and much more in three separate parameter sets
- Start-up detection
- Inside-delta circuit for savings in terms of size and equipment costs
- Various ramp-down modes selectable: free ramp-down, torque-controlled pump ramp-down, combined DC braking
- Solid-state motor overload and intrinsic device protection
- Thermistor motor protection
- Keypad with a menu-prompted, multi-line graphic display with background lighting
- Interface for communication with the PC for more accurate setting of the parameters as well as for control and monitoring
- Simple adaptation to the motor feeder
- Simple mounting and commissioning
- Display of operating states and fault messages
- Connection to PROFIBUS with optional PROFIBUS DP module
- External display and operator module
- Mains voltages from 200 to 690 V, 50 to 60 Hz
- Applicable up to 60 °C (derating from 40 °C)

3RW Soft Starters

3RW44 for high-feature applications

| Type | | 3RW44 ...BC.4 | 3RW44 ...BC.5 | 3RW44 ...BC.6 |
|---|------|---|---------------|---------------|
| Power electronics | | | | |
| Rated operational voltage for inline circuit | V AC | 200 ... 460 | 400 ... 600 | 400 ... 690 |
| Tolerance | % | -15/+10 | -15/+10 | -15/+10 |
| Maximum blocking voltage (thyristor) | V AC | 1400 | 1800 | 1800 |
| Rated operational voltage for inside-delta circuit | V AC | 200 ... 460 | 400 ... 600 | 400 ... 600 |
| Tolerance | % | -15/+10 | -15/+10 | -15/+10 |
| Rated frequency | Hz | 50 ... 60 | | |
| Tolerance | % | ±10 | | |
| Uninterrupted duty at 40 °C (% of I_e) | % | 115 | | |
| Minimum load (% of set motor current I_M) | % | 8 | | |
| Maximum cable length between soft starter and motor | m | 500 ¹⁾ | | |
| Permissible installation height | m | 5000 (derating from 1000, see characteristic curves); higher on request | | |
| Permissible mounting position | | | | |
| Installation type | | Stand-alone installation | | |
| | | | | |
| | | ① ≥ 5 mm (≥ 0.2 in) ② ≥ 75 mm (≥ 3 in) ③ ≥ 100 mm (≥ 4 in) | | |
| Permissible ambient temperature | | | | |
| Operation | °C | 0 ... +60; (derating from +40) | | |
| Storage | °C | -25 ... +80 | | |
| Degree of protection | | IP00 | | |

1) At the project configuration stage, it is important to make allowance for the voltage drop on the motor cable up to the motor connection. If necessary,

higher values for the rated operational voltage or current must be calculated accordingly for the soft starter.

| Type | | 3RW44 22 | 3RW44 23 | 3RW44 24 | 3RW44 25 | 3RW44 26 | 3RW44 27 |
|--|-----|----------|----------|----------|----------|----------|----------|
| Power electronics | | | | | | | |
| 40 °C/50 °C/60 °C | | | | | | | |
| Load rating with rated operational current I_e | | | | | | | |
| • Acc. to IEC and UL/CSA ¹⁾ , for individual mounting at 40/50/60 °C, AC-53a | A | 29/26/23 | 36/33/29 | 47/42/37 | 57/51/45 | 77/68/59 | 93/82/72 |
| Smallest adjustable rated motor current I_M | A | 5 | 7 | 9 | 11 | 15 | 18 |
| For the motor overload protection | | | | | | | |
| Power loss | | | | | | | |
| • In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 8 | 10 | 32 | 36 | 45 | 55 |
| • During starting with 300 % I_M (40 °C) | W | 400 | 470 | 600 | 725 | 940 | 1160 |
| Permissible rated motor current and starts per hour | | | | | | | |
| • Normal starting (Class 5) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 5 s | A | 29/26/23 | 36/33/29 | 47/42/37 | 57/51/45 | 77/68/59 | 93/82/72 |
| - Starts per hour ³⁾ | 1/h | 41 | 34 | 41 | 42 | 43 | 44 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 10 s | A | 29/26/23 | 36/33/29 | 47/42/37 | 57/51/45 | 77/68/59 | 93/82/72 |
| - Starts per hour ³⁾ | 1/h | 20 | 15 | 20 | 20 | 20 | 20 |
| • Normal starting (Class 10) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 10 s | A | 29/26/23 | 36/33/29 | 47/42/37 | 57/51/45 | 77/68/59 | 93/82/72 |
| - Starts per hour ³⁾ | 1/h | 20 | 15 | 20 | 20 | 20 | 20 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 20 s | A | 29/26/23 | 36/33/29 | 47/42/37 | 57/51/45 | 77/68/59 | 93/82/72 |
| - Starts per hour ³⁾ | 1/h | 10 | 6 | 10 | 10 | 8 | 8 |
| • Normal starting (Class 15) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 15 s | A | 29/26/23 | 36/33/29 | 47/42/37 | 57/51/45 | 77/68/59 | 93/82/72 |
| - Starts per hour ³⁾ | 1/h | 13 | 9 | 13 | 13 | 13 | 13 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 30 s | A | 29/26/23 | 36/33/29 | 47/42/37 | 57/51/45 | 77/68/59 | 93/82/72 |
| - Starts per hour ³⁾ | 1/h | 6 | 4 | 6 | 6 | 6 | 6 |
| • Normal starting (Class 20) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 20 s | A | 29/26/23 | 36/33/29 | 47/42/37 | 57/51/45 | 73/66/59 | 88/80/72 |
| - Starts per hour ³⁾ | 1/h | 10 | 6 | 10 | 10 | 10 | 10 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 30 s | A | 29/26/23 | 36/33/29 | 47/42/37 | 57/51/45 | 73/66/59 | 88/80/72 |
| - Starts per hour ³⁾ | 1/h | 4 | 2 | 4 | 5 | 1.8 | 0.8 |
| • For very heavy starting (Class 30) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 30 s | A | 29/26/23 | 36/33/29 | 44/42/37 | 57/51/45 | 65/60/54 | 77/70/63 |
| - Starts per hour ³⁾ | 1/h | 6 | 4 | 6 | 6 | 6 | 6 |
| - Rated motor current $I_M^{(2)(3)}$, starting time 60 s | A | 29/26/23 | 36/33/29 | 44/42/37 | 57/51/45 | 65/60/54 | 77/70/63 |
| - Starts per hour ³⁾ | 1/h | 1.8 | 0.8 | 3.3 | 1.5 | 2 | 1 |

1) Measurement at 60 °C according to UL/CSA not required.

2) With 300 % I_M .

3) For intermittent duty S4 with ON period = 30 %, $T_{ij} = 40$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.

4) Maximum adjustable rated motor current I_M , dependent on CLASS setting.

3RW Soft Starters

3RW44 for high-feature applications

| Type | | 3RW44 34 | 3RW44 35 | 3RW44 36 |
|--|-----|---------------------|----------------------|----------------------|
| Power electronics | | 40 °C/50 °C/60 °C | | |
| Load rating with rated operational current I_e | | | | |
| <ul style="list-style-type: none"> • Acc. to IEC and UL/CSA¹⁾, for individual mounting at 40/50/60 °C, AC-53a | A | 113/ 100 /88 | 134/ 117 /100 | 162/ 145 /125 |
| Smallest adjustable rated motor current I_M | | | | |
| For the motor overload protection | A | 22 | 26 | 32 |
| Power loss | | | | |
| <ul style="list-style-type: none"> • In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 64 | 76 | 95 |
| <ul style="list-style-type: none"> • During starting with 300 % I_M (40 °C) | W | 1350 | 1700 | 2460 |
| Permissible rated motor current and starts per hour | | | | |
| • Normal starting (Class 5) | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 5 s | A | 113/ 100 /88 | 134/ 117 /100 | 162/ 145 /125 |
| - Starts per hour ³⁾ | 1/h | 41 | 39 | 41 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 10 s | A | 113/ 100 /88 | 134/ 117 /100 | 162/ 145 /125 |
| - Starts per hour ³⁾ | 1/h | 20 | 15 | 20 |
| • Normal starting (Class 10) | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 10 s | A | 113/ 100 /88 | 134/ 117 /100 | 162/ 145 /125 |
| - Starts per hour ³⁾ | 1/h | 20 | 15 | 20 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 20 s | A | 113/ 100 /88 | 134/ 117 /100 | 162/ 145 /125 |
| - Starts per hour ³⁾ | 1/h | 9 | 6 | 7 |
| • Normal starting (Class 15) | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 15 s | A | 113/ 100 /88 | 134/ 117 /100 | 162/ 145 /125 |
| - Starts per hour ³⁾ | 1/h | 13 | 9 | 12 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 30 s | A | 113/ 100 /88 | 134/ 117 /100 | 162/ 145 /125 |
| - Starts per hour ³⁾ | 1/h | 6 | 6 | 1 |
| • Normal starting (Class 20) | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 20 s | A | 106/ 97 /88 | 125/ 113 /100 | 147/ 134 /122 |
| - Starts per hour ³⁾ | 1/h | 9 | 9 | 10 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 30 s | A | 106/ 97 /88 | 125/ 113 /100 | 147/ 134 /122 |
| - Starts per hour ³⁾ | 1/h | 1.5 | 2 | 1 |
| • For very heavy starting (Class 30) | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 30 s | A | 91/ 84 /76 | 110/ 100 /90 | 120/ 110 /100 |
| - Starts per hour ³⁾ | 1/h | 6 | 6 | 6 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 60 s | A | 91/ 84 /76 | 110/ 100 /90 | 120/ 110 /100 |
| - Starts per hour ³⁾ | 1/h | 2 | 2 | 2 |

1) Measurement at 60 °C according to UL/CSA not required.

2) With 300 % I_M .

3) For intermittent duty S4 with ON period = 30 %, $T_u = 40$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.

4) Maximum adjustable rated motor current I_M , dependent on CLASS setting.

3RW Soft Starters

3RW44 for high-feature applications

| Type | | 3RW44 43 | 3RW44 44 | 3RW44 45 | 3RW44 46 | 3RW44 47 |
|---|-----|-------------|-------------|-------------|-------------|-------------|
| Power electronics | | | | | | |
| 40 °C/50 °C/60 °C | | | | | | |
| Load rating with rated operational current I_e • Acc. to IEC and UL/CSA ¹⁾ , for individual mounting at 40/50/60 °C, AC-53a | A | 203/180/156 | 250/215/185 | 313/280/250 | 356/315/280 | 432/385/335 |
| Smallest adjustable rated motor current I_M For the motor overload protection | A | 40 | 50 | 62 | 71 | 86 |
| Power loss | | | | | | |
| • In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 89 | 110 | 145 | 174 | 232 |
| • During starting with 300 % I_M (40 °C) | W | 3350 | 4000 | 4470 | 5350 | 5860 |
| Permissible rated motor current and starts per hour | | | | | | |
| • Normal starting (Class 5) | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 5 s | A | 203/180/156 | 250/215/185 | 313/280/250 | 356/315/280 | 432/385/335 |
| - Starts per hour ³⁾ | 1/h | 41 | 41 | 41 | 41 | 39 |
| - Rated motor current $I_M^{(2,4)}$, starting time 10 s | A | 203/180/156 | 250/215/185 | 313/280/250 | 356/315/280 | 432/385/335 |
| - Starts per hour ³⁾ | 1/h | 20 | 20 | 19 | 17 | 16 |
| • Normal starting (Class 10) | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 10 s | A | 203/180/156 | 250/215/185 | 313/280/250 | 356/315/280 | 432/385/335 |
| - Starts per hour ³⁾ | 1/h | 20 | 20 | 19 | 17 | 16 |
| - Rated motor current $I_M^{(2,4)}$, starting time 20 s | A | 203/180/156 | 250/215/185 | 313/280/250 | 356/315/280 | 432/385/335 |
| - Starts per hour ³⁾ | 1/h | 9 | 10 | 6 | 4 | 5 |
| • Normal starting (Class 15) | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 15 s | A | 203/180/156 | 240/215/185 | 313/280/250 | 325/295/265 | 402/385/335 |
| - Starts per hour ³⁾ | 1/h | 13 | 13 | 10 | 13 | 11 |
| - Rated motor current $I_M^{(2,4)}$, starting time 30 s | A | 203/180/156 | 240/215/185 | 313/280/250 | 325/295/265 | 402/385/335 |
| - Starts per hour ³⁾ | 1/h | 3 | 6 | 1 | 2 | 1 |
| • Normal starting (Class 20) | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 20 s | A | 195/175/155 | 215/195/180 | 275/243/221 | 285/263/240 | 356/326/295 |
| - Starts per hour ³⁾ | 1/h | 10 | 10 | 10 | 10 | 10 |
| - Rated motor current $I_M^{(2,4)}$, starting time 30 s | A | 195/175/155 | 215/195/180 | 275/243/221 | 285/263/240 | 356/326/295 |
| - Starts per hour ³⁾ | 1/h | 1 | 5 | 1 | 3 | 1 |
| • For very heavy starting (Class 30) | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 30 s | A | 162/148/134 | 180/165/150 | 220/201/182 | 240/223/202 | 285/260/235 |
| - Starts per hour ³⁾ | 1/h | 6 | 6 | 6 | 6 | 6 |
| - Rated motor current $I_M^{(2,4)}$, starting time 60 s | A | 162/148/134 | 180/165/150 | 220/201/182 | 240/223/202 | 285/260/235 |
| - Starts per hour ³⁾ | 1/h | 3 | 3 | 3 | 2 | 1 |

¹⁾ Measurement at 60 °C according to UL/CSA not required.

²⁾ With 300 % I_M .

³⁾ For intermittent duty S4 with ON period = 30 %, $T_u = 40$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.

⁴⁾ Maximum adjustable rated motor current I_M , dependent on CLASS setting.

3RW Soft Starters

3RW44 for high-feature applications

| Type | | 3RW44 53 | 3RW44 54 | 3RW44 55 | 3RW44 56 | 3RW44 57 | 3RW44 58 |
|--|-----|-------------------|-------------|-------------|-------------|-------------|-------------|
| Power electronics | | 40 °C/50 °C/60 °C | | | | | |
| Load rating with rated operational current I_e | | | | | | | |
| • Acc. to IEC and UL/CSA ¹⁾ , for individual mounting at 40/50/60 °C, AC-53a | A | 551/494/438 | 615/551/489 | 693/615/551 | 780/693/615 | 880/780/693 | 970/850/760 |
| Smallest adjustable rated motor current I_M | A | 110 | 123 | 138 | 156 | 176 | 194 |
| For the motor overload protection | | | | | | | |
| Power loss | | | | | | | |
| • In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 159 | 186 | 220 | 214 | 250 | 270 |
| • During starting with 300 % I_M (40 °C) | W | 7020 | 8100 | 9500 | 11100 | 13100 | 15000 |
| Permissible rated motor current and starts per hour | | | | | | | |
| • Normal starting (Class 5) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 5 s | A | 551/494/438 | 615/551/489 | 693/615/551 | 780/693/615 | 880/780/693 | 970/850/760 |
| - Starts per hour ³⁾ | 1/h | 41 | 41 | 37 | 33 | 22 | 17 |
| - Rated motor current $I_M^{(2/4)}$, starting time 10 s | A | 551/494/438 | 615/551/489 | 693/615/551 | 780/693/615 | 880/780/693 | 970/850/760 |
| - Starts per hour ³⁾ | 1/h | 20 | 20 | 16 | 13 | 8 | 5 |
| • Normal starting (Class 10) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 10 s | A | 551/494/438 | 615/551/489 | 693/615/551 | 780/693/615 | 880/780/693 | 970/850/760 |
| - Starts per hour ³⁾ | 1/h | 20 | 20 | 16 | 13 | 8 | 5 |
| - Rated motor current $I_M^{(2/4)}$, starting time 20 s | A | 551/494/438 | 615/551/489 | 693/615/551 | 780/693/615 | 880/780/693 | 970/850/760 |
| - Starts per hour ³⁾ | 1/h | 10 | 9 | 6 | 4 | 0.3 | 0.3 |
| • Normal starting (Class 15) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 15 s | A | 551/494/438 | 615/551/489 | 666/615/551 | 723/693/615 | 780/710/650 | 821/755/693 |
| - Starts per hour ³⁾ | 1/h | 13 | 13 | 11 | 9 | 8 | 8 |
| - Rated motor current $I_M^{(2/4)}$, starting time 30 s | A | 551/494/438 | 615/551/489 | 666/615/551 | 723/693/615 | 780/710/650 | 821/755/693 |
| - Starts per hour ³⁾ | 1/h | 6 | 4 | 3 | 1 | 0.4 | 0.5 |
| • Normal starting (Class 20) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 20 s | A | 551/494/438 | 591/551/489 | 633/615/551 | 670/634/576 | 710/650/590 | 740/685/630 |
| - Starts per hour ³⁾ | 1/h | 10 | 10 | 7 | 8 | 8 | 9 |
| - Rated motor current $I_M^{(2/4)}$, starting time 30 s | A | 551/494/438 | 591/551/489 | 633/615/551 | 670/634/576 | 710/650/590 | 740/685/630 |
| - Starts per hour ³⁾ | 1/h | 4 | 2 | 1 | 1 | 0.4 | 1 |
| • For very heavy starting (Class 30) | | | | | | | |
| - Rated motor current $I_M^{(2)}$, starting time 30 s | A | 500/480/438 | 525/489/455 | 551/520/480 | 575/540/490 | 600/550/500 | 630/580/530 |
| - Starts per hour ³⁾ | 1/h | 6 | 6 | 6 | 6 | 6 | 6 |
| - Rated motor current $I_M^{(2/4)}$, starting time 60 s | A | 500/480/438 | 525/489/455 | 551/520/480 | 575/540/490 | 600/550/500 | 630/580/530 |
| - Starts per hour ³⁾ | 1/h | 2 | 1 | 1 | 1 | 1.5 | 1 |

¹⁾ Measurement at 60 °C according to UL/CSA not required.

²⁾ With 300 % I_M .

³⁾ For intermittent duty S4 with ON period = 30 %, $T_U = 40$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.

⁴⁾ Maximum adjustable rated motor current I_M , dependent on CLASS setting.

3RW Soft Starters

3RW44 for high-feature applications

| Type | | 3RW44 65 | 3RW44 66 |
|--|-----|-------------------|---------------|
| Power electronics | | 40 °C/50 °C/60 °C | |
| Load rating with rated operational current I_e | | | |
| • Acc. to IEC and UL/CSA ¹⁾ , for individual mounting at 40/50/60 °C, AC-53a | A | 1076/970/880 | 1214/1076/970 |
| Smallest adjustable rated motor current I_M | | | |
| For the motor overload protection | A | 215 | 242 |
| Power loss | | | |
| • In operation after completed starting with uninterrupted rated operational current (40 °C) approx. | W | 510 | 630 |
| • During starting with 300 % I_M (40 °C) | W | 15000 | 17500 |
| Permissible rated motor current and starts per hour | | | |
| • Normal starting (Class 5) | | | |
| - Rated motor current $I_M^{(2)}$, starting time 5 s | A | 1076/970/880 | 1214/1076/970 |
| - Starts per hour ³⁾ | 1/h | 30 | 20 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 10 s | A | 1076/970/880 | 1214/1076/970 |
| - Starts per hour ³⁾ | 1/h | 10 | 6 |
| • Normal starting (Class 10) | | | |
| - Rated motor current $I_M^{(2)}$, starting time 10 s | A | 1076/970/880 | 1214/1076/970 |
| - Starts per hour ³⁾ | 1/h | 11 | 6 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 20 s | A | 1076/970/880 | 1214/1076/970 |
| - Starts per hour ³⁾ | 1/h | 3 | 0.5 |
| • Normal starting (Class 15) | | | |
| - Rated motor current $I_M^{(2)}$, starting time 15 s | A | 1020/950/850 | 1090/1000/920 |
| - Starts per hour ³⁾ | 1/h | 7 | 5 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 30 s | A | 1020/950/850 | 1090/1000/920 |
| - Starts per hour ³⁾ | 1/h | 1 | 1 |
| • Normal starting (Class 20) | | | |
| - Rated motor current $I_M^{(2)}$, starting time 20 s | A | 970/880/810 | 1030/940/860 |
| - Starts per hour ³⁾ | 1/h | 7 | 5 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 30 s | A | 970/880/810 | 1030/940/860 |
| - Starts per hour ³⁾ | 1/h | 1 | 1 |
| • For very heavy starting (Class 30) | | | |
| - Rated motor current $I_M^{(2)}$, starting time 30 s | A | 880/810/740 | 920/850/780 |
| - Starts per hour ³⁾ | 1/h | 6 | 6 |
| - Rated motor current $I_M^{(2)(4)}$, starting time 60 s | A | 880/810/740 | 920/850/780 |
| - Starts per hour ³⁾ | 1/h | 1 | 1 |

1) Measurement at 60 °C according to UL/CSA not required.

2) With 300 % I_M .

3) For intermittent duty S4 with ON period = 30 %, $T_u = 40$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.

4) Maximum adjustable rated motor current I_M , dependent on CLASS setting.

3RW Soft Starters

3RW44 for high-feature applications



3RW44 27-1BC44



3RW44 36-6BC44



3RW44 47-6BC44



3RW44 58-6BC44



3RW44 66-6BC44

| Ambient temperature 40 °C | | | | | Ambient temperature 50 °C | | | | | DT | Order No. | List Price \$ per PU | PU (UNIT, SET, M) | PS* | PG | Weight per PU approx. kg | |
|--|---|-------------|-------|-------|---------------------------|---------------------------------|---|-------|-------|-------|-----------|----------------------|-------------------|-----|--------|--------------------------|--------|
| Rated operational current $I_e^{1)}$ | Rated power of induction motors for rated operational voltage U_e | | | | | Rated operational current I_e | Rated power of induction motors for rated operational voltage U_e | | | | | | | | | | |
| A | 230 V | 400 V | 500 V | 690 V | 1000 V | A | 200 V | 230 V | 460 V | 575 V | | | | | | | |
| | kW | kW | kW | kW | kW | | hp | hp | hp | hp | | | | | | | |
| Inside-delta circuits, rated operational voltage 200 ... 460 V²⁾ | | | | | | | | | | | | | | | | | |
| 50 | 15 | 22 | -- | -- | -- | 45 | 10 | 15 | 30 | -- | ▶ | 3RW44 22-□BC□4 | | 1 | 1 unit | 131 | 6.500 |
| 62 | 18.5 | 30 | -- | -- | -- | 55 | 15 | 20 | 40 | -- | ▶ | 3RW44 23-□BC□4 | | 1 | 1 unit | 131 | 6.500 |
| 81 | 22 | 45 | -- | -- | -- | 73 | 20 | 25 | 50 | -- | ▶ | 3RW44 24-□BC□4 | | 1 | 1 unit | 131 | 6.500 |
| 99 | 30 | 55 | -- | -- | -- | 88 | 25 | 30 | 60 | -- | ▶ | 3RW44 25-□BC□4 | | 1 | 1 unit | 131 | 6.500 |
| 133 | 37 | 75 | -- | -- | -- | 118 | 30 | 40 | 75 | -- | ▶ | 3RW44 26-□BC□4 | | 1 | 1 unit | 131 | 6.500 |
| 161 | 45 | 90 | -- | -- | -- | 142 | 40 | 50 | 100 | -- | ▶ | 3RW44 27-□BC□4 | | 1 | 1 unit | 131 | 6.500 |
| Order No. supplement for connection types | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> • With spring-type terminals • With screw terminals | | | | | | | | | | | | | | | | | |
| 196 | 55 | 110 | -- | -- | -- | 173 | 50 | 60 | 125 | -- | B | 3RW44 34-□BC□4 | | 1 | 1 unit | 131 | 7.900 |
| 232 | 75 | 132 | -- | -- | -- | 203 | 60 | 75 | 150 | -- | B | 3RW44 35-□BC□4 | | 1 | 1 unit | 131 | 7.900 |
| 281 | 90 | 160 | -- | -- | -- | 251 | 75 | 100 | 200 | -- | B | 3RW44 36-□BC□4 | | 1 | 1 unit | 131 | 7.900 |
| 352 | 110 | 200 | -- | -- | -- | 312 | 100 | 125 | 250 | -- | B | 3RW44 43-□BC□4 | | 1 | 1 unit | 131 | 11.500 |
| 433 | 132 | 250 | -- | -- | -- | 372 | 125 | 150 | 300 | -- | B | 3RW44 44-□BC□4 | | 1 | 1 unit | 131 | 11.500 |
| 542 | 160 | 315 | -- | -- | -- | 485 | 150 | 200 | 400 | -- | B | 3RW44 45-□BC□4 | | 1 | 1 unit | 131 | 11.500 |
| 617 | 200 | 355 | -- | -- | -- | 546 | 150 | 200 | 450 | -- | B | 3RW44 46-□BC□4 | | 1 | 1 unit | 131 | 11.500 |
| 748 | 250 | 400 | -- | -- | -- | 667 | 200 | 250 | 600 | -- | B | 3RW44 47-□BC□4 | | 1 | 1 unit | 131 | 11.500 |
| 954 | 315 | 560 | -- | -- | -- | 856 | 300 | 350 | 750 | -- | C | 3RW44 53-□BC□4 | | 1 | 1 unit | 131 | 50.000 |
| 1065 | 355 | 630 | -- | -- | -- | 954 | 350 | 400 | 850 | -- | C | 3RW44 54-□BC□4 | | 1 | 1 unit | 131 | 50.000 |
| 1200 | 400 | 710 | -- | -- | -- | 1065 | 350 | 450 | 950 | -- | C | 3RW44 55-□BC□4 | | 1 | 1 unit | 131 | 50.000 |
| 1351 | 450 | 800 | -- | -- | -- | 1200 | 450 | 500 | 1050 | -- | C | 3RW44 56-□BC□4 | | 1 | 1 unit | 131 | 50.000 |
| 1524 | 500 | 900 | -- | -- | -- | 1351 | 450 | 600 | 1200 | -- | C | 3RW44 57-□BC□4 | | 1 | 1 unit | 131 | 50.000 |
| 1680 | 560 | 1000 | -- | -- | -- | 1472 | 550 | 650 | 1300 | -- | C | 3RW44 58-□BC□4 | | 1 | 1 unit | 131 | 50.000 |
| 1864 | 630 | 1100 | -- | -- | -- | 1680 | 650 | 750 | 1500 | -- | C | 3RW44 65-□BC□4 | | 1 | 1 unit | 131 | 78.000 |
| 2103 | 710 | 1200 | -- | -- | -- | 1864 | 700 | 850 | 1700 | -- | C | 3RW44 66-□BC□4 | | 1 | 1 unit | 131 | 78.000 |
| Order No. supplement for connection types | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> • With spring-type terminals • With screw terminals | | | | | | | | | | | | | | | | | |
| Order No. supplement for the rated control supply voltage $U_s^{3)}$ | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> • 115 V AC • 230 V AC | | | | | | | | | | | | | | | | | |

Order No. supplement for connection types

- With spring-type terminals
- With screw terminals

Order No. supplement for the rated control supply voltage $U_s^{3)}$

- 115 V AC
- 230 V AC

¹⁾ In the selection table, the unit rated current I_e refers to the induction motor's rated operational current in the inside-delta circuit. The actual current of the device is approx. 58 % of this value.

²⁾ 3RW44 2 ... 3RW44 4. soft starters with screw terminals: delivery times ▶ (preferred type),

³⁾ Control by way of the internal 24 V DC supply and direct control by means of PLC possible.

Note:

Soft starter selection depends on the rated motor current.

The 3RW44 solid-state soft starters are designed for normal starting (Class 10). (Inertia load of the overall operating mechanism $J_{Load} < 10 \times J_{Motor}$; starting current 350 % $\times I_e$ for 20 s similar load). For any other conditions of use, the devices should be selected using the Win-Soft Starter selection and simulation program. See Technical specifications for information about rated currents for ambient temperatures > 40 °C and switching frequency.

3RW Soft Starters

3RW44 for high-feature applications

| Ambient temperature 40 °C | | | | | | Ambient temperature 50 °C | | | | | DT | Order No. | List Price \$ per PU | PU (UNIT, SET, M) | PS* | PG | Weight per PU approx. | |
|--|---|-------|-------------|-------|--------|---------------------------------|---|-------|-------|-------------|----|-----------------------|----------------------|-------------------|--------|-----|-----------------------|----|
| Rated operational current $I_e^{1)}$ | Rated power of induction motors for rated operational voltage U_e | | | | | Rated operational current I_e | Rated power of induction motors for rated operational voltage U_e | | | | | | | | | | | |
| A | 230 V | 400 V | 500 V | 690 V | 1000 V | A | 200 V | 230 V | 460 V | 575 V | | | | | | | | kg |
| | kW | kW | kW | kW | kW | | hp | hp | hp | hp | | | | | | | | |
| Inside-delta circuits, rated operational voltage 400 ... 600 V²⁾ | | | | | | | | | | | | | | | | | | |
| 50 | -- | 22 | 30 | -- | -- | 45 | -- | -- | 30 | 40 | A | 3RW44 22-□BC□5 | | 1 | 1 unit | 131 | 6.500 | |
| 62 | -- | 30 | 37 | -- | -- | 55 | -- | -- | 40 | 50 | A | 3RW44 23-□BC□5 | | 1 | 1 unit | 131 | 6.500 | |
| 81 | -- | 45 | 45 | -- | -- | 73 | -- | -- | 50 | 60 | A | 3RW44 24-□BC□5 | | 1 | 1 unit | 131 | 6.500 | |
| 99 | -- | 55 | 55 | -- | -- | 88 | -- | -- | 60 | 75 | A | 3RW44 25-□BC□5 | | 1 | 1 unit | 131 | 6.500 | |
| 133 | -- | 75 | 90 | -- | -- | 118 | -- | -- | 75 | 100 | A | 3RW44 26-□BC□5 | | 1 | 1 unit | 131 | 6.500 | |
| 161 | -- | 90 | 110 | -- | -- | 142 | -- | -- | 100 | 125 | A | 3RW44 27-□BC□5 | | 1 | 1 unit | 131 | 6.500 | |
| Order No. supplement for connection types | | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> • With spring-type terminals • With screw terminals | | | | | | | | | | | | | | | | | | |
| 196 | -- | 110 | 132 | -- | -- | 173 | -- | -- | 125 | 150 | B | 3RW44 34-□BC□5 | | 1 | 1 unit | 131 | 7.900 | |
| 232 | -- | 132 | 160 | -- | -- | 203 | -- | -- | 150 | 200 | B | 3RW44 35-□BC□5 | | 1 | 1 unit | 131 | 7.900 | |
| 281 | -- | 160 | 200 | -- | -- | 251 | -- | -- | 200 | 250 | B | 3RW44 36-□BC□5 | | 1 | 1 unit | 131 | 7.900 | |
| 352 | -- | 200 | 250 | -- | -- | 312 | -- | -- | 250 | 300 | B | 3RW44 43-□BC□5 | | 1 | 1 unit | 131 | 11.500 | |
| 433 | -- | 250 | 315 | -- | -- | 372 | -- | -- | 300 | 350 | B | 3RW44 44-□BC□5 | | 1 | 1 unit | 131 | 11.500 | |
| 542 | -- | 315 | 355 | -- | -- | 485 | -- | -- | 400 | 500 | B | 3RW44 45-□BC□5 | | 1 | 1 unit | 131 | 11.500 | |
| 617 | -- | 355 | 450 | -- | -- | 546 | -- | -- | 450 | 600 | B | 3RW44 46-□BC□5 | | 1 | 1 unit | 131 | 11.500 | |
| 748 | -- | 400 | 500 | -- | -- | 667 | -- | -- | 600 | 750 | B | 3RW44 47-□BC□5 | | 1 | 1 unit | 131 | 11.500 | |
| 954 | -- | 560 | 630 | -- | -- | 856 | -- | -- | 750 | 950 | C | 3RW44 53-□BC□5 | | 1 | 1 unit | 131 | 50.000 | |
| 1065 | -- | 630 | 710 | -- | -- | 954 | -- | -- | 850 | 1050 | C | 3RW44 54-□BC□5 | | 1 | 1 unit | 131 | 50.000 | |
| 1200 | -- | 710 | 800 | -- | -- | 1065 | -- | -- | 950 | 1200 | C | 3RW44 55-□BC□5 | | 1 | 1 unit | 131 | 50.000 | |
| 1351 | -- | 800 | 900 | -- | -- | 1200 | -- | -- | 1050 | 1350 | C | 3RW44 56-□BC□5 | | 1 | 1 unit | 131 | 50.000 | |
| 1524 | -- | 900 | 1000 | -- | -- | 1351 | -- | -- | 1200 | 1500 | C | 3RW44 57-□BC□5 | | 1 | 1 unit | 131 | 50.000 | |
| 1680 | -- | 1000 | 1200 | -- | -- | 1472 | -- | -- | 1300 | 1650 | C | 3RW44 58-□BC□5 | | 1 | 1 unit | 131 | 50.000 | |
| 1864 | -- | 1100 | 1350 | -- | -- | 1680 | -- | -- | 1500 | 1900 | C | 3RW44 65-□BC□5 | | 1 | 1 unit | 131 | 78.000 | |
| 2103 | -- | 1200 | 1500 | -- | -- | 1864 | -- | -- | 1700 | 2100 | C | 3RW44 66-□BC□5 | | 1 | 1 unit | 131 | 78.000 | |

Order No. supplement for connection types

- With spring-type terminals
- With screw terminals

Order No. supplement for the rated control supply voltage $U_s^{3)}$

- 115 V AC
- 230 V AC

¹⁾ In the selection table, the unit rated current I_e refers to the induction motor's rated operational current in the inside-delta circuit. The actual current of the device is approx. 58 % of this value.

²⁾ Soft starter with screw terminals:
 3RW44 2. ... 3RW44 4. Delivery time A
 3RW44 5. ... 3RW44 6. Delivery time B.

³⁾ Control by way of the internal 24 V DC supply and direct control by means of PLC possible.

Note:

Soft starter selection depends on the rated motor current.

The 3RW44 solid-state soft starters are designed for normal starting (Class 10). (Inertia load of the overall operating mechanism $J_{Load} < 10 \times J_{Motor}$; starting current 350 % $\times I_e$ for 20 s similar load). For any other conditions of use, the devices should be selected using the Win-Soft Starter selection and simulation program. See Technical specifications for information about rated currents for ambient temperatures > 40 °C and switching frequency.

3RW Soft Starters

3RW44 for high-feature applications

Technical specifications

| Type | Terminal | | 3RW44 ...-BC3. | 3RW44 ...-BC4. |
|--------------------------------------|----------|----|----------------|----------------|
| Control electronics | | | | |
| Rated values | | | | |
| Rated control supply voltage | A1/A2/PE | V | 115 AC | 230 AC |
| • Tolerance | | % | -15/+10 | -15/+10 |
| Rated control supply current STANDBY | | mA | 30 | 20 |
| Rated control supply current ON | | | | |
| • 3RW44 2. | | mA | 300 | 170 |
| • 3RW44 3. | | mA | 500 | 250 |
| • 3RW44 4. | | mA | 750 | 400 |
| • 3RW44 5. | | mA | 450 | 200 |
| • 3RW44 6. | | mA | 650 | 300 |
| Maximum current (pickup bypass) | | | | |
| • 3RW44 2. | | mA | 1000 | 500 |
| • 3RW44 3. | | mA | 2500 | 1250 |
| • 3RW44 4. | | mA | 6000 | 3000 |
| • 3RW44 5. | | mA | 4500 | 2500 |
| • 3RW44 6. | | mA | 4500 | 2500 |
| Rated frequency | | Hz | 50 ... 60 | 50 ... 60 |
| • Tolerance | | % | ±10 | ±10 |

| Type | Terminal | | 3RW44.. | Factory default |
|---|----------|-------|---|-----------------------------------|
| Control electronics | | | | |
| Control inputs | | | | |
| Input 1 | IN1 | | | Start motor right parameter set 1 |
| Input 2 | IN2 | | | No action |
| Input 3 | IN3 | | | No action |
| Input 4 | IN4 | | | Trip reset |
| Supply | L+/L- | | | |
| • Rated operational current | L+ | mA | Approx. 10 per input to DIN 19240 | |
| • Rated operational voltage | L- | | Internal voltage: 24 V DC from internal supply through terminal L+ to IN1 ... IN4. Maximum load at L+ approx. 55 mA | |
| | | | External voltage: DC external voltage (acc. to DIN 19240) through terminals L- and IN1 ... IN4 (min. 12 V DC, max. 30 V DC) | |
| Thermistor motor protection input | | | | |
| Input | T1/T2 | | PTC type A or Thermoclick | Deactivated |
| Relay outputs (floating auxiliary contacts) | | | | |
| Output 1 | 13/14 | | | ON period |
| Output 2 | 23/24 | | | No action |
| Output 3 | 33/34 | | | No action |
| Output 4 | 95/96/98 | | | Group fault |
| Switching capacity of the relay outputs (auxiliary contacts) | | | | |
| 230 V/AC-15 | | A | 3 at 240 V | |
| 24 V/DC-13 | | A | 1 at 24 V | |
| Protection against overvoltages | | | Protection by means of varistor through relay contact | |
| Short-circuit protection | | | 4 A gL/gG operational class; 6 A quick (fuse is not included in scope of supply) | |
| Protection functions | | | | |
| Motor protection functions | | | | |
| Trips in the event of | | | Thermal overloading of the motor | |
| Trip class acc. to IEC 60947-4-1 | | Class | 5/10/15/20/30 | 10 |
| Phase failure sensitivity | | % | >40 | |
| Overload warning | | | Yes | |
| Reset and recovery | | | Manual/Automatic | Manual |
| Reset option after tripping | | | Manual/Automatic | Manual |
| Recovery time | | min. | 1 ... 30 | 1 |
| Device protection functions | | | | |
| Trips in the event of | | | Thermal overloading of the thyristors | |
| Reset option after tripping | | | Manual/Automatic | Manual |
| Recovery time | | min. | 0.5 | |
| Bypass protection functions | | | | |
| Trips in the event of | | | Thermal overloading of the bypass contacts | |
| Reset option after tripping | | | Manual | |
| Recovery time | | min. | 1 | |

3RW Soft Starters

3RW44 for high-feature applications

| Type | 3RW44.. | | Factory default |
|--|---------|---------------------------|-----------------|
| Control times and parameters | | | |
| Control times | | | |
| Closing time (with connected control voltage) | ms | <50 | |
| Closing time (automatic mode) | ms | <4000 | |
| Recovery time (closing command in active ramp-down) | ms | <100 | |
| Mains failure bridging time | | | |
| Control supply voltage | ms | 100 | |
| Mains failure response time | | | |
| Load circuit | ms | 100 | |
| Reclosing lockout after overload trip | | | |
| Motor protection trip | min. | 1 ... 30 | 1 |
| Device protection trip | s | 30 | |
| Setting options for starting | | | |
| Voltage ramp for starting voltage | % | 20 ... 100 | 30 |
| Torque control for starting torque | % | 10 ... 100 | 10 |
| Torque control for limit torque | % | 20 ... 200 | 150 |
| Starting time | s | 0 ... 360 ³⁾ | 20 |
| Maximum starting time | s | 1 ... 1000 | Deactivated |
| Current limit value | % | 125 ... 550 ¹⁾ | 450 |
| Breakaway voltage | % | 40 ... 100 | 80 |
| Breakaway time | s | 0 ... 2 | Deactivated |
| Motor heat output | % | 1 ... 100 | 20 |
| Creep mode Left/Right running | | | |
| Speed factor as function of rated speed ($n = n_{rated}/factor$) | | 3 ... 21 | 7 |
| Creep torque ²⁾ | % | 20 ... 100 | 50 |
| Setting options for ramp-down | | | |
| Torque control for stopping torque | % | 10 ... 100 | 10 |
| Ramp-down time | s | 0 ... 360 ³⁾ | 10 |
| Dynamic braking torque | % | 20 ... 100 | 50 |
| DC braking torque | % | 20 ... 100 | 50 |
| Operating indications | | | |
| Test voltage | | | |
| Test mains phases | | | |
| Ready to start | | | |
| Start active | | | |
| Motor running | | | |
| Ramp-down active | | | |
| Emergency start active | | | |
| Warnings/error signals | | | |
| Mains voltage missing | | | |
| Leading-edge phase error | | | |
| Phase failure | | | |
| • L1 | | | |
| • L2 | | | |
| • L3 | | | |
| Missing load phase | | | |
| • T1 | | | |
| • T2 | | | |
| • T3 | | | |
| Failure | | | |
| • Contact element 1 (thyristor) | | | |
| • Contact element 2 (thyristor) | | | |
| • Contact element 3 (thyristor) | | | |
| Flash memory faulty | | | |
| Supply voltage | | | |
| • Below 75 % | | | |
| • Below 85 % | | | |
| • Over 110 % | | | |
| Current unbalance exceeded | | | |
| Thermal motor model overload | | | |
| Prewarning limit exceeded | | | |
| • Motor heating | | | |
| • Time-related trip reserve | | | |
| Bypass element defective | | | |
| Mains voltage too high | | | |
| Device not named | | | |
| Wrong naming version | | | |
| Current measuring range exceeded | | | |
| Bypass element protection disconnection | | | |
| Power section | | | |
| • Overheated | | | |
| • Overheating | | | |

¹⁾ Max. current limit value for 3RW44 53 ... 3RW44 57: 500 % and for 3RW44 58 ... 3RW44 66: 450 %.

²⁾ Reference variable depends on the motor used but is always smaller than the rated torque of the motor.

³⁾ Actual motor start times are load dependent.

3RW Soft Starters







3RW44 for high-feature applications

| Type | 3RW44 .. | Factory default |
|--|--|---|
| Control times and parameters | | |
| Warnings/error signals (continued) | | |
| | Temperature sensor <ul style="list-style-type: none"> • Overload • Open circuit • Short-circuit Ground fault <ul style="list-style-type: none"> • Detected Connection abort in manual operating mode Max. number of starts exceeded I_g limit value overshoot/undershoot Heat sink sensor <ul style="list-style-type: none"> • Open circuit • Short-circuit Quick-stop active Switching block defective I_g /class setting not permissible No external start-up parameters received PAA fault | |
| Control inputs Input 1 Input 2 Input 3 Input 4 Parameterizing options for control inputs 1 ... 4 | No action Local manual mode Emergency start Creep speed Quick-stop Trip reset Motor right parameter set 1 Motor left parameter set 1 ¹⁾ Motor right parameter set 2 Motor left parameter set 2 ¹⁾ Motor right parameter set 3 Motor left parameter set 3 ¹⁾ | Motor right parameter set 1 No action No action Trip reset |
| Relay outputs Output 1 Output 2 Output 3 Output 4 Parameterizing options for relay outputs 1 ... 3 | No action PAA output 1 PAA output 2 Input 1 Input 2 Input 3 Input 4 Starting Operation/Bypass Ramp-down ON period Command motor on DC braking contactor Group warning Group fault Bus fault Device fault Power on Ready to start | ON period No action No action Group fault |
| Motor temperature sensor | Deactivated Thermoclick PTC type A | |

¹⁾ Parameter motor left possible only in conjunction with creep mode.

3RW Soft Starters

3RW44 for high-feature applications

| Type | | 3RW44 2. | 3RW44 3. | 3RW44 4. | 3RW44 5. 3RW44 6. |
|---|---|--|---|---|---|
| Conductor cross-sections | | | | | |
| Screw terminals | Main conductors | | | | |
| With box terminal | | | 3RT19 55-4G (55 kW) | 3RT19 66-4G | -- |
| Front clamping point connected | <ul style="list-style-type: none"> Finely stranded with end sleeve Finely stranded without end sleeve Solid Stranded Ribbon cable conductors (number x width x thickness) AWG cables, solid or stranded | mm ² 2.5 ... 35 mm ² 4 ... 50 mm ² 2.5 ... 16 mm ² 4 ... 70 mm 6 x 9 x 0.8 AWG 10 ... 2/0 | 16 ... 70 16 ... 70 -- 16 ... 70 Min. 3 x 9 x 0.8 Max. 6 x 15.5 x 0.8 6 ... 2/0 | 70 ... 240 70 ... 240 -- 95 ... 300 Min. 6 x 9 x 0.8 Max. 20 x 24 x 0.5 3/0 ... 600 kcmil | -- |
|  | | | | | |
| Rear clamping point connected | <ul style="list-style-type: none"> Finely stranded with end sleeve Finely stranded without end sleeve Solid Stranded Ribbon cable conductors (number x width x thickness) AWG cables, solid or stranded | mm ² 2.5 ... 50 mm ² 10 ... 50 mm ² 2.5 ... 16 mm ² 10 ... 70 mm 6 x 9 x 0.8 AWG 10 ... 2/0 | 16 ... 70 16 ... 70 -- 16 ... 70 Min. 3 x 9 x 0.8 Max. 6 x 15.5 x 0.8 6 ... 2/0 | 120 ... 185 120 ... 185 -- 120 ... 240 Min. 6 x 9 x 0.8 Max. 20 x 24 x 0.5 250 ... 500 kcmil | -- |
|  | | | | | |
| Both clamping points connected | <ul style="list-style-type: none"> Finely stranded with end sleeve Finely stranded without end sleeve Solid Stranded Ribbon cable conductors (number x width x thickness) AWG cables, solid or stranded Terminal screws - Tightening torque | mm ² 2 x (2.5 ... 35) mm ² 2 x (4 ... 35) mm ² 2 x (2.5 ... 16) mm ² 2 x (4 ... 50) mm 2 x (6 x 9 x 0.8) AWG 2 x (10 ... 1/0) M6 (hexagon socket, A/F4) 4 ... 6 36 ... 53 NM lb.in | Max. 1 x 50, 1 x 70 Max. 1 x 50, 1 x 70 -- Max. 2 x 70 Max. 2 x (6 x 15.5 x 0.8) Max. 2 x 1/0 M10 (hexagon socket, A/F4) 10 ... 12 90 ... 110 | Min. 2 x 50 Max. 2 x 185 Min. 2 x 50 Max. 2 x 185 -- Max. 2 x 70 Max. 2 x 240 Max. 2 x (20 x 24 x 0.5) Min. 2 x 2/0 Max. 2 x 500 kcmil M12 (hexagon socket, A/F4) 20 ... 22 180 ... 195 | -- |
|  | | | | | |
| Screw terminals | Main conductors | | | | |
| With box terminal | | -- | 3RT19 56-4G | -- | -- |
| Front or rear clamping point connected | <ul style="list-style-type: none"> Finely stranded with end sleeve Finely stranded without end sleeve Stranded Ribbon cable conductors (number x width x thickness) AWG cables, solid or stranded | mm ² -- mm ² -- mm ² -- mm -- AWG -- | 16 ... 120 16 ... 120 16 ... 120 Min. 3 x 9 x 0.8 Max. 6 x 15.5 x 0.8 6 ... 250 kcmil | -- | -- |
|  |  | | | | |
| Both clamping points connected | <ul style="list-style-type: none"> Finely stranded with end sleeve Finely stranded without end sleeve Stranded Ribbon cable conductors (number x width x thickness) AWG cables, solid or stranded | mm ² -- mm ² -- mm ² -- mm -- AWG -- | Max. 1 x 95, 1 x 120 Max. 1 x 95, 1 x 120 Max. 2 x 120 Max. 2 x (10 x 15.5 x 0.8) Max. 2 x 3/0 | -- | -- |
|  | | | | | |
| Screw terminals | Main conductors | | | | |
| | <u>Without box terminal/busbar connection</u> | | | | |
| | <ul style="list-style-type: none"> Finely stranded with cable lug Stranded with cable lug AWG cables, solid or stranded Connecting bar (max. width) Terminal screws - Tightening torque | mm ² -- mm ² -- AWG -- mm -- -- NM -- lb.in -- | 16 ... 95 ¹⁾ 25 ... 120 ¹⁾ 4 ... 250 kcmil 17 M8 x 25 (A/F13) 10 ... 14 89 ... 124 | 50 ... 240 ²⁾ 70 ... 240 ²⁾ 2/0 ... 500 kcmil 25 M10 x 30 (A/F17) 14 ... 24 124 ... 210 | 50 ... 240 ²⁾ 70 ... 240 ²⁾ 2/0 ... 500 kcmil 60 M12 x 40 20 ... 35 177 ... 310 |

1) When connecting cable lugs to DIN 46235, use 3RT19 56-4EA1 terminal cover for conductor cross-sections from 95 mm² to ensure phase spacing.
 2) When connecting cable lugs to DIN 46234, the 3RT19 66-4EA1 terminal cover must be used for conductor cross-sections of 240 mm² and more as well as DIN 46235 for conductor cross-sections of 185 mm² and more to keep the phase clearance.

3RW Soft Starters

3RW44 for high-feature applications

| Soft starters | Type | 3RW44.. | |
|---|-----------------|---------------------------|---|
| Conductor cross-sections | | | |
| Auxiliary conductors (1 or 2 conductors can be connected): | | | |
| Screw terminals | | | |
| • Solid | mm ² | 2 x (0.5 ... 2.5) | |
| • Finely stranded with end sleeve | mm ² | 2 x (0.5 ... 1.5) | |
| • AWG cables | | | |
| - Solid or stranded | AWG | 2 x (20 ... 14) | |
| - Finely stranded with end sleeve | AWG | 2 x (20 ... 16) | |
| • Terminal screws | | | |
| - Tightening torque | NM lb.in | 0.8 ... 1.2 7 ... 10.3 | |
| Spring-type terminals | | | |
| • Solid | mm ² | 2 x (0.25 ... 1.5) | |
| • Finely stranded with end sleeve | mm ² | 2 x (0.25 ... 1.5) | |
| • AWG cables, solid or stranded | AWG | 2 x (24 ... 16) | |
| | | Standard | Parameters |
| Electromagnetic compatibility acc. to EN 60947-4-2 | | | |
| EMC interference immunity | | | |
| Electrostatic discharge (ESD) | | EN 61000-4-2 | ±4 kV contact discharge, ±8 kV air discharge |
| Electromagnetic RF fields | | EN 61000-4-3 | Frequency range: 80 ... 1000 MHz with 80 % at 1 kHz Degree of severity 3, 10 V/m |
| Conducted RF interference | | EN 61000-4-6 | Frequency range: 150 kHz ... 80 MHz with 80 % at 1 kHz Interference 10 V |
| RF voltages and RF currents on cables | | | |
| • Burst | | EN 61000-4-4 | ±2 kV/5 kHz |
| • Surge | | EN 61000-4-5 | ±1 kV line to line ±2 kV line to ground |
| EMC interference emission | | | |
| EMC interference field strength | | EN 55011 | Limit value of Class A at 30 ... 1000 MHz |
| Radio interference voltage | | EN 55011 | Limit value of Class A at 0.15 ... 30 MHz |
| Is an RI suppression filter necessary? | | | |
| Degree of noise suppression A (industrial applications) | | No | |

3RW Soft Starters

Circuit Breaker SCCR

| Soft starters ToC 1 | Circuit Brakers | | | | | | | | | | | | | | | | | | | |
|---------------------------|-----------------|---------------------|-------------|------------|---------|-------------|------------|--------------------|--------------|------------|---------|--------------|------------|---------|-------------|------------|---------|-------------|-----|-----|
| | Rated current | Thermal Magnetic | | | | | | Instantaneous Trip | | | | | | Fuse | | | | | | |
| 480 V Type | | SCCR kA | Max. size A | 600 V Type | SCCR kA | Max. size A | 480 V Type | SCCR kA | Max. size A | 600 V Type | SCCR kA | Max. size A | 600 V Type | SCCR kA | Max. size A | 600 V Type | SCCR kA | Max. size A | | |
| Q11 Type | | | | | | | | | | | | | | | | | | | | |
| 3RW44 22 | 11 | ED63B, HEG3G | 100 | 40 | | | | | ED63A, HEM3M | 100 | 40 | ED63A, HEM3M | 50 | 40 | RK5 | 100 | 50 | J | 100 | 100 |
| 3RW44 23 | 23 | ED63B, HEG3G | 100 | 50 | | | | | ED63A, HEM3M | 100 | 50 | ED63A, HEM3M | 50 | 50 | RK5 | 100 | 60 | J | 100 | 120 |
| 3RW44 24 | 29 | ED63B, HEG3G | 100 | 70 | | | | | ED63A, HEM3M | 100 | 100 | ED63A, HEM3M | 50 | 50 | RK5 | 100 | 80 | J | 100 | 160 |
| 3RW44 25 | 29 | ED63B, HEG3G | 100 | 70 | | | | | ED63A, HEM3M | 100 | 50 | ED63A, HEM3M | 50 | 50 | RK5 | 100 | 80 | | | |
| 3RW44 26 | 29 | ED63B, HEG3G | 100 | 100 | | | | | ED63A, HEM3M | 100 | 100 | ED63A, HEM3M | 50 | 100 | RK5 | 100 | 125 | J | 100 | 250 |
| 3RW44 27 | 34 | ED63B, HEG3G, FD63B | 100 | 150 | | | | | ED63A, HEM3M | 100 | 100 | ED63A, HEM3M | 50 | 125 | RK5 | 100 | 150 | J | 100 | 300 |
| 3RW44 34 | 42 | FD63B | 100 | 150 | FD63B | 50 | 150 | ED63A, HEM3M | 100 | 125 | FXD63A | 50 | 150 | RK5 | 100 | 200 | J | 100 | 400 | |
| 3RW44 35 | 58 | FD63B | 100 | 150 | FD63B | 50 | 150 | FXD63A | 100 | 150 | FXD63A | 50 | 150 | RK5 | 100 | 200 | J | 100 | 400 | |
| 3RW44 36 | 62 | JD63B | 100 | 200 | JD63B | 50 | 250 | FXD63A | 100 | 250 | FXD63A | 50 | 250 | RK5 | 100 | 250 | J | 100 | 500 | |
| 3RW44 43 | 73 | JD63B | 100 | 300 | JD63B | 50 | 250 | FXD63A | 100 | 250 | JXD63A | 50 | 300 | RK5 | 100 | 300 | J | 100 | 600 | |
| 3RW44 44 | 98 | JD63B | 100 | 300 | JD63B | 50 | 300 | JXD63A | 100 | 300 | JXD63A | 50 | 300 | RK5 | 100 | 350 | | | | |
| 3RW44 45 | 98 | JD63B | 100 | 400 | JD63B | 50 | 400 | JXD63A | 100 | 400 | JXD63A | 50 | 400 | RK5 | 100 | 450 | | | | |
| 3RW44 46 | 98 | LD63B | 100 | 500 | LD63B | 50 | 450 | LXD63H | 100 | 400 | JXD63A | 50 | 400 | RK5 | 100 | 600 | | | | |
| 3RW44 47 | 98 | LD63B | 100 | 600 | LD63B | 50 | 600 | LXD63H | 100 | 600 | LXD63H | 50 | 600 | L | 100 | 700 | | | | |
| 3RW44 53 | 117 | HMD6 | 65 | 800/800 | HMD6 | 50 | 800/800 | | | | | | | L | 100 | 1000 | | | | |
| 3RW44 54 | 145 | HND6 | 100 | 1200/900 | HND6 | 50 | 1200/900 | | | | | | | L | 100 | 1000 | | | | |
| 3RW44 55 | 145 | HND6 | 100 | 1200/900 | HND6 | 50 | 1200/900 | | | | | | | L | 100 | 1000 | | | | |
| 3RW44 56 | 145 | HND6 | 100 | 1200/1000 | HND6 | 50 | 1200/1000 | | | | | | | L | 100 | 1000 | | | | |
| 3RW44 57 | 145 | HND6 | 100 | 1200/1000 | HND6 | 50 | 1200/1000 | | | | | | | L | 100 | 1000 | | | | |
| 3RW44 58 | 145 | CND6 | 65 | 1200 | CND6 | 65 | 1200 | | | | | | | | | | | | | |
| 3RW44 65 | 205 | CND6 | 42 | 1600 | CND6 | 42 | 1600 | | | | | | | | | | | | | |
| 3RW44 66 | 248 | CND6 | 42 | 1600 | CND6 | 42 | 1600 | | | | | | | | | | | | | |

Specified Type

ED63A
FXD63A
JXD63A
ED63B
FD63B
JD63B
HND6


Others permitted

HED63A, HHED63A or CED63A
HFXD63A or CFD63A
HJXD63A or CJD63A
HED63B, HHED63B or CED63B
HFD63B, HHFD63B or CFD63B
HJ63B, HHJD63B or CJD63B
HNXD6 or CND6

3RW Soft Starters

3RW44 for high-feature applications

Inline circuit fused version with 3NE1 SITOR all-range fuse (semiconductor and line protection)



For matching fuse bases see Catalog LV 1 under "SETRON Switching and Protection Devices for Power Distribution" → "Switch Disconnectors", and Catalog ET B1 under "BETA Protecting" → "SITOR Semiconductor Fuses" or go to www.siemens.com/sitor → "Products" → "BETA Protecting" → "SITOR"

| Soft starters Q11 Type | Rated current A | All-range fuses | | | Line contactors up to 400 V (optional) Q21 Type | Braking contactors ¹⁾²⁾ (for example circuit see page 7/70) Q91 Type Q92 Type | | |
|--|--------------------|-----------------|--------------------|--------------|---|---|----------|----------|
| | | F'1 Type | Rated current A | Voltage V | | Size | | |
| Type of coordination "2"ⁿ³⁾; I_q = 65 kA | | | | | | | | |
| 3RW44 22 | 29 | 3NE1 020-2 | 80 | 690 +5 % | 00 | 3RT10 34 | 3RT15 26 | -- |
| 3RW44 23 | 36 | 3NE1 020-2 | 80 | 690 +5 % | 00 | 3RT10 35 | 3RT15 26 | -- |
| 3RW44 24 | 47 | 3NE1 021-2 | 100 | 690 +5 % | 00 | 3RT10 36 | 3RT15 35 | -- |
| 3RW44 25 | 57 | 3NE1 022-2 | 125 | 690 +5 % | 00 | 3RT10 44 | 3RT15 35 | -- |
| 3RW44 26 | 77 | 3NE1 022-2 | 125 | 690 +5 % | 00 | 3RT10 45 | 3RT10 24 | 3RT10 35 |
| 3RW44 27 | 93 | 3NE1 024-2 | 160 | 690 +5 % | 1 | 3RT10 46 | 3RT10 25 | 3RT10 36 |
| 3RW44 34 | 113 | 3NE1 225-2 | 200 | 690 +5 % | 1 | 3RT10 54 | 3RT10 34 | 3RT10 44 |
| 3RW44 35 | 134 | 3NE1 227-2 | 250 | 690 +5 % | 1 | 3RT10 55 | 3RT10 36 | 3RT10 45 |
| 3RW44 36 | 162 | 3NE1 227-2 | 250 | 690 +5 % | 1 | 3RT10 56 | 3RT10 44 | 3RT10 45 |
| 3RW44 43 | 203 | 3NE1 230-2 | 315 | 600 +10 % | 1 | 3RT10 64 | 3RT10 44 | 3RT10 54 |
| 3RW44 44 | 250 | 3NE1 331-2 | 350 | 460 +10 % | 2 | 3RT10 65 | 3RT10 44 | 3RT10 55 |
| 3RW44 45 | 313 | 3NE1 333-2 | 450 | 690 +5 % | 2 | 3RT10 75 | 3RT10 54 | 3RT10 56 |
| 3RW44 46 | 356 | 3NE1 334-2 | 500 | 690 +5 % | 2 | 3RT10 75 | 3RT10 54 | 3RT10 56 |
| 3RW44 47 | 432 | 3NE1 435-2 | 560 | 690 +5 % | 3 | 3RT10 76 | 3RT10 55 | 3RT10 64 |
| 3RW44 53 | 551 | 2 x 3NE1 334-2 | 500 | 690 +10 % | 2 | 3TF68 | 3RT10 64 | 3RT10 66 |
| 3RW44 54 | 615 | 2 x 3NE1 334-2 | 500 | 690 +10 % | 2 | 3TF68 | 3RT10 64 | 3RT10 75 |
| 3RW44 55 | 693 | 2 x 3NE1 334-2 | 500 | 690 +10 % | 2 | 3TF69 | 3RT10 65 | 3RT10 75 |
| 3RW44 56 | 780 | 2 x 3NE1 435-2 | 560 | 690 +10 % | 3 | 3TF69 | 3RT10 65 | 3RT10 75 |
| 3RW44 57 | 880 | 2 x 3NE1 435-2 | 560 | 690 +10 % | 3 | | 3RT10 75 | 3RT10 76 |
| 3RW44 58 | 970 | 2 x 3NE1 435-2 | 560 | 690 +10 % | 3 | | 3RT10 75 | 3RT10 76 |
| 3RW44 65 | 1076 | 3 x 3NE1 334-2 | 500 | 690 +10 % | 2 | | 3RT10 75 | 3TF68 |
| 3RW44 66 | 1214 | 3 x 3NE1 435-2 | 560 | 690 +10 % | 3 | | 3RT10 76 | 3TF68 |

1) If the ramp-down function "Combined braking" is selected, no braking contactor is required.
If the ramp-down function "DC braking" is selected, a braking contactor must be used in addition (see table for type).
For applications with large centrifugal masses ($J_{Load} > J_{Motor}$) we recommend the function "DC braking".

2) Additional auxiliary relay K4:
LZX:RT4A4T30
(3RW44 soft starter with rated control supply voltage 230 V AC),
LZX:RT4A4S15
(3RW44 soft starter with rated control supply voltage 115 V AC).


3) The type of coordination "2" refers only to soft starters in combination with the stipulated protective device (motor starter protector/circuit breaker/fuse), not to any additional components in the feeder.
[The types of coordination are explained under "3RA1 Fuseless Load Feeders".](#)

3RW Soft Starters

3RW44 for high-feature applications

Inline circuit fused version with 3NE or 3NC SITOR semiconductor fuse

(semiconductor protection by fuse, line and overload protection by motor starter protector/circuit breaker)

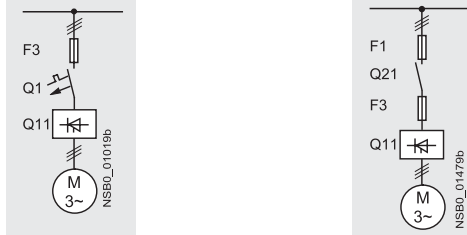

For matching fuse bases see Catalog LV 1 under "SENTRON Switching and Protection Devices for Power Distribution" → "Switch Disconnectors", and Catalog ET B1 under "BETA Protecting" → "SITOR Semiconductor Fuses" or go to www.siemens.com/sitor → "Products" → "BETA Protecting" → "SITOR"

| Soft starters Q11 Type | Rated current A | Semiconductor fuses, minimum | | | Semiconductor fuses, maximum | | | Semiconductor fuses (cylinder) | | |
|---|--------------------|------------------------------|--------------------|------|------------------------------|--------------------|------|--------------------------------|--------------------|---------|
| | | 690 V +10 % F3 Type | Rated current A | Size | 690 V +10 % F3 Type | Rated current A | Size | F3 Type | Rated current A | Size |
| Type of coordination "2"³⁾: I_q = 65 kA | | | | | | | | | | |
| 3RW44 22 | 29 | 3NE4 120 | 80 | 0 | 3NE4 121 | 100 | 0 | 3NC2 280 | 80 | 22 x 58 |
| 3RW44 23 | 36 | 3NE4 121 | 100 | 0 | 3NE4 121 | 100 | 0 | 3NC2 200 | 100 | 22 x 58 |
| 3RW44 24 | 47 | 3NE4 121 | 100 | 0 | 3NE4 122 | 125 | 0 | 3NC2 200 | 100 | 22 x 58 |
| 3RW44 25 | 57 | 3NE4 122 | 125 | 0 | 3NE4 124 | 160 | 0 | | | |
| 3RW44 26 | 77 | 3NE4 124 | 160 | 0 | 3NE4 124 | 160 | 0 | | | |
| 3RW44 27 | 93 | 3NE3 224 | 160 | 1 | 3NE3 332-0B | 400 | 2 | | | |
| 3RW44 34 | 113 | 3NE3 225 | 200 | 1 | 3NE3 335 | 560 | 2 | | | |
| 3RW44 35 | 134 | 3NE3 225 | 200 | 1 | 3NE3 335 | 560 | 2 | | | |
| 3RW44 36 | 162 | 3NE3 227 | 250 | 1 | 3NE3 333 | 450 | 2 | | | |
| 3RW44 43 | 203 | 3NE3 230-0B | 315 | 1 | 3NE3 333 | 450 | 2 | | | |
| 3RW44 44 | 250 | 3NE3 230-0B | 315 | 1 | 3NE3 333 | 450 | 2 | | | |
| 3RW44 45 | 313 | 3NE3 233 | 450 | 1 | 3NE3 336 | 630 | 2 | | | |
| 3RW44 46 | 356 | 3NE3 333 | 450 | 2 | 3NE3 336 | 630 | 2 | | | |
| 3RW44 47 | 432 | 3NE3 335 | 560 | 2 | 3NE3 338-8 | 800 | 2 | | | |
| 3RW44 53 | 551 | 2 x 3NE3 335 | 560 | 2 | 3 x 3NE3 334-0B | 500 | 2 | | | |
| 3RW44 54 | 615 | 2 x 3NE3 335 | 560 | 2 | 3 x 3NE3 334-0B | 500 | 2 | | | |
| 3RW44 55 | 693 | 2 x 3NE3 335 | 560 | 2 | 3 x 3NE3 334-0B | 500 | 2 | | | |
| 3RW44 56 | 780 | 2 x 3NE3 336 | 630 | 2 | 2 x 3NE3 340-8 | 900 | 2 | | | |
| 3RW44 57 | 880 | 2 x 3NE3 336 | 630 | 2 | 2 x 3NE3 340-8 | 900 | 2 | | | |
| 3RW44 58 | 970 | 2 x 3NE3 336 | 630 | 2 | 2 x 3NE3 340-8 | 900 | 2 | | | |
| 3RW44 65 | 1076 | 2 x 3NE3 340-8 | 900 | 2 | 3 x 3NE3 338-8 | 800 | 2 | | | |
| 3RW44 66 | 1214 | 2 x 3NE3 340-8 | 900 | 2 | 3 x 3NE3 338-8 | 800 | 2 | | | |

| Soft starters Q11 Type | Rated current A | Line contactors (optional) Q21 Type | Braking contactors ¹⁾²⁾ (for example circuit see page 7/64) | | Motor starter protectors/ circuit breakers | | Line protection, maximum | | | |
|---|--------------------|--|---|-------------|---|--------------------|--------------------------|--------------------|---------|----|
| | | | Q91 Type | Q92 Type | 440 V +10 % Q1 Type | Rated current A | 690 V +5 % F1 Type | Rated current A | Size | |
| Type of coordination "2"³⁾: I_q = 65 kA | | | | | | | | | | |
| 3RW44 22 | 29 | 3RT10 34 | 3RT15 26 | -- | 3RV10 41-4HA10 | 50 | | 3NA3 820-6 | 50 | 00 |
| 3RW44 23 | 36 | 3RT10 35 | 3RT15 26 | -- | 3RV10 41-4JA10 | 63 | | 3NA3 822-6 | 63 | 00 |
| 3RW44 24 | 47 | 3RT10 36 | 3RT15 35 | -- | 3RV10 41-4KA10 | 75 | | 3NA3 824-6 | 80 | 00 |
| 3RW44 25 | 57 | 3RT10 44 | 3RT15 35 | -- | 3RV10 41-4LA10 | 90 | | 3NA3 830-6 | 100 | 00 |
| 3RW44 26 | 77 | 3RT10 45 | 3RT10 24 | 3RT10 35 | 3RV10 41-4MA10 | 100 | | 3NA3 132-6 | 125 | 1 |
| 3RW44 27 | 93 | 3RT10 46 | 3RT10 25 | 3RT10 36 | 3RV10 41-4MA10 | 100 | | 3NA3 136-6 | 160 | 1 |
| 3RW44 34 | 113 | 3RT10 54 | 3RT10 34 | 3RT10 44 | 3VL17 16 | 160 | | 3NA3 244-6 | 250 | 2 |
| 3RW44 35 | 134 | 3RT10 55 | 3RT10 36 | 3RT10 45 | 3VL17 16 | 160 | | 3NA3 244-6 | 250 | 2 |
| 3RW44 36 | 162 | 3RT10 56 | 3RT10 44 | 3RT10 45 | 3VL37 25 | 250 | | 3NA3 365-6 | 500 | 3 |
| 3RW44 43 | 203 | 3RT10 64 | 3RT10 44 | 3RT10 54 | 3VL47 31 | 315 | | 2 x 3NA3 354-6 | 2 x 355 | 3 |
| 3RW44 44 | 250 | 3RT10 65 | 3RT10 44 | 3RT10 55 | 3VL47 31 | 315 | | 2 x 3NA3 354-6 | 2 x 355 | 3 |
| 3RW44 45 | 313 | 3RT10 75 | 3RT10 54 | 3RT10 56 | 3VL47 40 | 400 | | 2 x 3NA3 365-6 | 2 x 500 | 3 |
| 3RW44 46 | 356 | 3RT10 75 | 3RT10 54 | 3RT10 56 | 3VL47 40 | 400 | | 2 x 3NA3 365-6 | 2 x 500 | 3 |
| 3RW44 47 | 432 | 3RT10 76 | 3RT10 55 | 3RT10 64 | 3VL57 50 | 500 | | 2 x 3NA3 365-6 | 2 x 500 | 3 |
| 3RW44 53 | 551 | 3TF68 | 3RT10 64 | 3RT10 66 | 3VL67 80 | 800 | | 2 x 3NA3 365-6 | 2 x 500 | 3 |
| 3RW44 54 | 615 | 3TF68 | 3RT10 64 | 3RT10 75 | 3VL67 80 | 800 | | 2 x 3NA3 365-6 | 2 x 500 | 3 |
| 3RW44 55 | 693 | 3TF69 | 3RT10 65 | 3RT10 75 | 3VL67 80 | 800 | | 2 x 3NA3 365-6 | 2 x 500 | 3 |
| 3RW44 56 | 780 | 3TF69 | 3RT10 65 | 3RT10 75 | 3VL77 10 | 1000 | | 2 x 3NA3 365-6 | 2 x 500 | 3 |
| 3RW44 57 | 880 | | 3RT10 75 | 3RT10 76 | 3VL77 10 | 1000 | | 2 x 3NA3 365-6 | 2 x 500 | 3 |
| 3RW44 58 | 970 | | 3RT10 75 | 3RT10 76 | 3VL77 12 | 1250 | | 3 x 3NA3 365-6 | 3 x 500 | 3 |
| 3RW44 65 | 1076 | | 3RT10 75 | 3TF68 | 3VL77 12 | 1250 | | 3 x 3NA3 365-6 | 3 x 500 | 3 |
| 3RW44 66 | 1214 | | 3RT10 76 | 3TF68 | 3VL77 12 | 1250 | | 3 x 3NA3 365-6 | 3 x 500 | 3 |

1) If the ramp-down function "Combined braking" is selected, no braking contactor is required. If the ramp-down function "DC braking" is selected, a braking contactor must be used in addition (see table for type). For applications with large centrifugal masses ($J_{Load} > J_{Motor}$) we recommend the function "DC braking".


2) Additional auxiliary relay K4:
LZX:RT4A4T30
(3RW44 soft starter with rated control supply voltage 230 V AC),
LZX:RT4A4S15
(3RW44 soft starter with rated control supply voltage 115 V AC).

3) The type of coordination "2" refers only to soft starters in combination with the stipulated protective device (motor starter protector/circuit breaker/fuse), not to any additional components in the feeder. The types of coordination are explained under "3RA1 Fuseless Load Feeders".

3RW Soft Starters

3RW44 for high-feature applications

Inside-delta circuit fused version with 3NE or 3NC SITOR fuses
 (semiconductor protection by fuse, lead and overload protection by motor starter protector/circuit breaker)

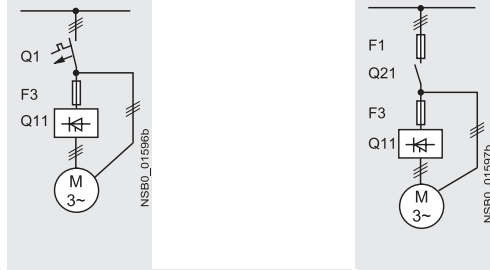

For matching fuse bases see Catalog LV 1 under "SENTRON Switching and Protection Devices for Power Distribution" → "Switch Disconnectors", and Catalog ET B1 under "BETA Protecting" → "SITOR Semiconductor Fuses" or go to www.siemens.com/sitor → "Products" → "BETA Protecting" → "SITOR"

| Soft starters TOC 2 Q11 Type | Rated current A | Semiconductor fuses, minimum | | | Semiconductor fuses, maximum | | | Semiconductor fuses (cylinder) | | |
|--|--------------------|------------------------------|--------------------|------|------------------------------|--------------------|------|--------------------------------|--------------------|---------|
| | | F3 Type | Rated current A | Size | F3 Type | Rated current A | Size | F3 Type | Rated current A | Size |
| Type of coordination "2"¹⁾ | | | | | | | | | | |
| 3RW44 22 | 50 | 3NE4 120 | 80 | 0 | 3NE4 121 | 100 | 0 | 3NC2 280 | 80 | 22 x 58 |
| 3RW44 23 | 62 | 3NE4 121 | 100 | 0 | 3NE4 121 | 100 | 0 | 3NC2 200 | 100 | 22 x 58 |
| 3RW44 24 | 81 | 3NE4 121 | 100 | 0 | 3NE4 122 | 125 | 0 | 3NC2 200 | 100 | 22 x 58 |
| 3RW44 25 | 99 | 3NE4 122 | 125 | 0 | 3NE4 124 | 160 | 0 | | | |
| 3RW44 26 | 133 | 3NE4 124 | 160 | 0 | 3NE4 124 | 160 | 0 | | | |
| 3RW44 27 | 161 | 3NE3 224 | 160 | 1 | 3NE3 332-0B | 400 | 2 | | | |
| 3RW44 34 | 196 | 3NE3 225 | 200 | 1 | 3NE3 335 | 560 | 2 | | | |
| 3RW44 35 | 232 | 3NE3 225 | 200 | 1 | 3NE3 335 | 560 | 2 | | | |
| 3RW44 36 | 281 | 3NE3 227 | 250 | 1 | 3NE3 333 | 450 | 2 | | | |
| 3RW44 43 | 352 | 3NE3 230-0B | 315 | 1 | 3NE3 333 | 450 | 2 | | | |
| 3RW44 44 | 433 | 3NE3 230-0B | 315 | 1 | 3NE3 333 | 450 | 2 | | | |
| 3RW44 45 | 542 | 3NE3 233 | 450 | 1 | 3NE3 336 | 630 | 2 | | | |
| 3RW44 46 | 617 | 3NE3 333 | 450 | 2 | 3NE3 336 | 630 | 2 | | | |
| 3RW44 47 | 748 | 3NE3 335 | 560 | 2 | 3NE3 338-8 | 800 | 2 | | | |
| 3RW44 53 | 954 | 2 x 3NE3 335 | 560 | 2 | 3 x 3NE3 334-0B | 500 | 2 | | | |
| 3RW44 54 | 1065 | 2 x 3NE3 335 | 560 | 2 | 3 x 3NE3 334-0B | 500 | 2 | | | |
| 3RW44 55 | 1200 | 2 x 3NE3 335 | 560 | 2 | 3 x 3NE3 334-0B | 500 | 2 | | | |
| 3RW44 56 | 1351 | 2 x 3NE3 336 | 630 | 2 | 2 x 3NE3 340-8 | 900 | 2 | | | |
| 3RW44 57 | 1524 | 2 x 3NE3 336 | 630 | 2 | 3 x 3NE3 340-8 | 900 | 2 | | | |
| 3RW44 58 | 1680 | 2 x 3NE3 336 | 630 | 2 | 3 x 3NE3 340-8 | 900 | 2 | | | |
| 3RW44 65 | 1864 | 2 x 3NE3 340-8 | 900 | 2 | 3 x 3NE3 338-8 | 800 | 2 | | | |
| 3RW44 66 | 2103 | 2 x 3NE3 340-8 | 900 | 2 | 3 x 3NE3 338-8 | 800 | 2 | | | |

| Soft starters TOC 2 Q11 Type | Rated current A | Line contactors up to 400 V (optional) | | Motor starter protectors/circuit breakers | | Line protection, maximum | | |
|--|--------------------|--|----------------|---|--------------------|--------------------------|------|----|
| | | Q21 Type | Q1 Type | Rated current A | Rated current A | Rated current A | Size | |
| Type of coordination "2"¹⁾ | | | | | | | | |
| 3RW44 22 | 50 | 3RT10 36-1AP04 | 3RV10 42-4KA10 | 75 | 3NA3 824-6 | 80 | | 00 |
| 3RW44 23 | 62 | 3RT10 44-1AP04 | 3RV10 42-4LA10 | 90 | 3NA3 830-6 | 100 | | 00 |
| 3RW44 24 | 81 | 3RT10 46-1AP04 | 3RV10 42-4MA10 | 100 | 3NA3 132-6 | 125 | | 1 |
| 3RW44 25 | 99 | 3RT10 54-1AP36 | 3VL27 16 | 160 | 3NA3 136-6 | 160 | | 1 |
| 3RW44 26 | 133 | 3RT10 55-6AP36 | 3VL27 16 | 160 | 3NA3 240-6 | 200 | | 2 |
| 3RW44 27 | 161 | 3RT10 56-6AP36 | 3VL37 20 | 200 | 3NA3 244-6 | 250 | | 2 |
| 3RW44 34 | 196 | 3RT10 64-6AP36 | 3VL37 25 | 250 | 3NA3 360-6 | 400 | | 3 |
| 3RW44 35 | 232 | 3RT10 65-6AP36 | 3VL47 31 | 315 | 3NA3 360-6 | 400 | | 3 |
| 3RW44 36 | 281 | 3RT10 66-6AP36 | 3VL47 40 | 400 | 2 x 3NA3 360-6 | 2 x 400 | | 3 |
| 3RW44 43 | 352 | 3RT10 75-6AP36 | 3VL47 40 | 400 | 2 x 3NA3 365-6 | 2 x 500 | | 3 |
| 3RW44 44 | 433 | 3RT10 76-6AP36 | 3VL57 50 | 500 | 2 x 3NA3 365-6 | 2 x 500 | | 3 |
| 3RW44 45 | 542 | 3TF68 44-0CM7 | 3VL57 63 | 800 | 3 x 3NA3 365-6 | 3 x 500 | | 3 |
| 3RW44 46 | 617 | 3TF68 44-0CM7 | 3VL67 80 | 800 | 3 x 3NA3 365-6 | 3 x 500 | | 3 |
| 3RW44 47 | 748 | 3TF69 | 3VL67 80 | 800 | 3 x 3NA3 365-6 | 3 x 500 | | 3 |
| 3RW44 53 | 954 | | 3VL77 10 | 1000 | 3 x 3NA3 365-6 | 3 x 500 | | 3 |
| 3RW44 54 | 1065 | | 3VL77 12 | 1250 | 3 x 3NA3 365-6 | 3 x 500 | | 3 |
| 3RW44 55 | 1200 | | 3VL87 16 | 1600 | 3 x 3NA3 365-6 | 3 x 500 | | 3 |
| 3RW44 56 | 1351 | | 3VL87 16 | 1600 | 3 x 3NA3 372 | 3 x 630 | | 3 |
| 3RW44 57 | 1524 | | 3VL87 16 | 1600 | 3 x 3NA3 372 | 3 x 630 | | 3 |
| 3RW44 58 | 1680 | | 3WL12 20 | 2000 | 2 x 3NA3 480 | 2 x 1000 | | 4 |
| 3RW44 65 | 1864 | | 3WL12 25 | 2500 | 2 x 3NA3 482 | 2 x 1250 | | 4 |
| 3RW44 66 | 2103 | | 3WL12 25 | 2500 | 2 x 3NA3 482 | 2 x 1250 | | 4 |

¹⁾ The type of coordination "2" refers only to soft starters in combination with the stipulated protective device (motor starter protector/circuit breaker/fuse), not to any additional components in the feeder.


The types of coordination are explained under "3RA1 Fuseless Load Feeders".

3RW Soft Starters


3RW44 for high-feature applications

Characteristic curves


Motor protection tripping characteristics for 3RW44 (with symmetry)

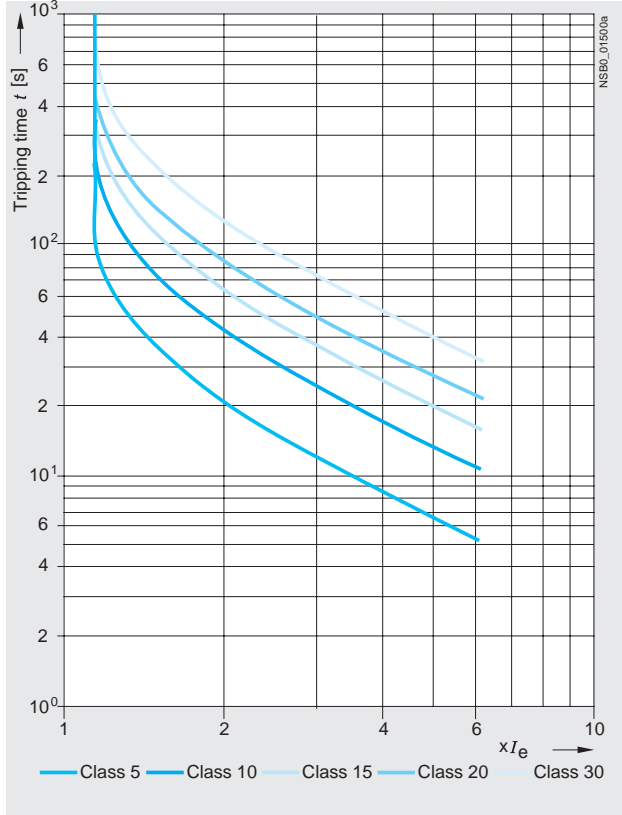

Motor protection tripping characteristics for 3RW44 (with asymmetry)

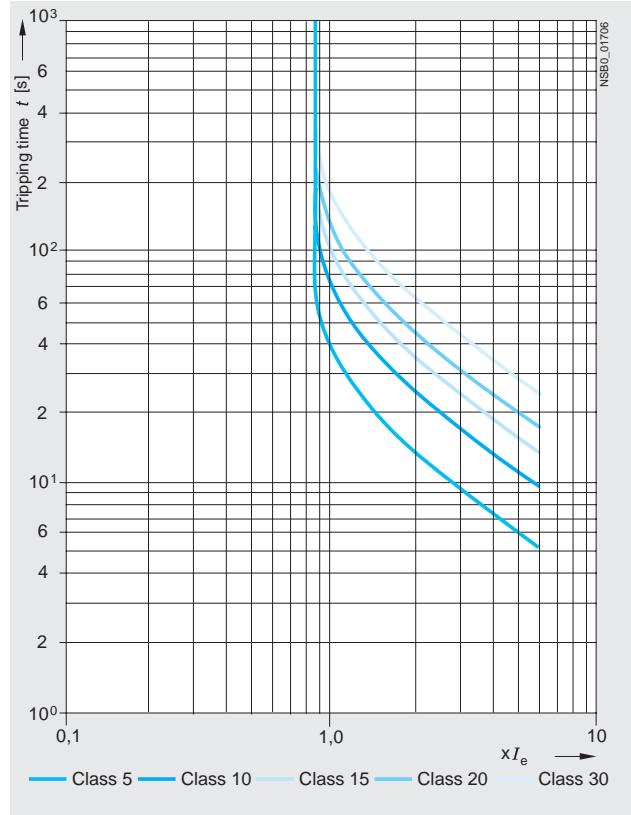

Permissible installation height

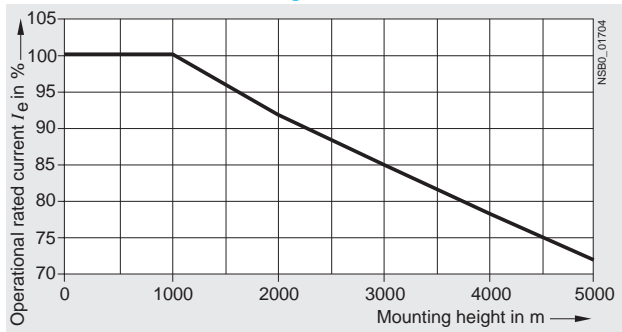

At an installation height above 2000 m, the max. permissible operational voltage is reduced to 460 V.

3RW Soft Starters

3RW44 for high-feature applications

More information

Application examples for normal starting (Class 10)

Normal starting Class 10 (up to 20 s with 350 % $I_{n \text{ motor}}$).

The soft starter rating can be selected to be as high as the rating of the motor used

| Application | Conveyor belt | Roller conveyor | Compressor | Small fan | Pump | Hydraulic pump |
|-------------------------------------|---------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Starting parameters | | | | | | |
| • Voltage ramp and current limiting | | | | | | |
| - Starting voltage | % | 70 | 60 | 50 | 30 | 30 |
| - Starting time | s | 10 | 10 | 10 | 10 | 10 |
| - Current limit value | | Deactivated | Deactivated | $4 \times I_M$ | $4 \times I_M$ | Deactivated |
| • Torque ramp | | | | | | |
| - Starting torque | | 60 | 50 | 40 | 20 | 10 |
| - End torque | | 150 | 150 | 150 | 150 | 150 |
| - Starting time | | 10 | 10 | 10 | 10 | 10 |
| • Breakaway pulse | | | | | | |
| | | Deactivated (0 ms) | Deactivated (0 ms) | Deactivated (0 ms) | Deactivated (0 ms) | Deactivated (0 ms) |
| Ramp-down mode | | | | | | |
| | | Smooth ramp-down | Smooth ramp-down | Free ramp-down | Free ramp-down | Pump ramp-down |
| | | | | | | Free ramp-down |

Application examples for heavy starting (Class 20)

Heavy starting Class 20 (up to 40 s with 350 % $I_{n \text{ motor}}$).

The soft starter has to be selected one performance class higher than the motor used

| Application | Stirrer | Centrifuge | Milling machine |
|-------------------------------------|---------|--------------------|------------------------------|
| Starting parameters | | | |
| • Voltage ramp and current limiting | | | |
| - Starting voltage | % | 30 | 30 |
| - Starting time | s | 30 | 30 |
| - Current limit value | | $4 \times I_M$ | $4 \times I_M$ |
| • Torque ramp | | | |
| - Starting torque | | 30 | 30 |
| - End torque | | 150 | 150 |
| - Starting time | | 30 | 30 |
| • Breakaway pulse | | | |
| | | Deactivated (0 ms) | Deactivated (0 ms) |
| Ramp-down mode | | | |
| | | Free ramp-down | Free ramp-down or DC braking |

Application examples for very heavy starting (Class 30)

Very heavy starting Class 30 (up to 60 s with 350 % $I_{n \text{ motor}}$).

The soft starter has to be selected two performance classes higher than the motor used

| Application | Large fan | Mill | Crusher | Circular saw/bandsaw |
|-------------------------------------|-----------|--------------------|----------------|----------------------|
| Starting parameters | | | | |
| • Voltage ramp and current limiting | | | | |
| - Starting voltage | % | 30 | 50 | 30 |
| - Starting time | s | 60 | 60 | 60 |
| - Current limit value | | $4 \times I_M$ | $4 \times I_M$ | $4 \times I_M$ |
| • Torque ramp | | | | |
| - Starting torque | | 20 | 50 | 20 |
| - End torque | | 150 | 150 | 150 |
| - Starting time | | 60 | 60 | 60 |
| • Breakaway pulse | | | | |
| | | Deactivated (0 ms) | 80 %, 300 ms | Deactivated (0 ms) |
| Ramp-down mode | | | | |
| | | Free ramp-down | Free ramp-down | Free ramp-down |

Note:

These tables present sample set values and device sizes. They are intended only for the purposes of information and are not binding. The set values depend on the application in question and must be optimized during commissioning. The soft starter dimensions should be checked where necessary with the Win-Soft Starter software or with the help of Technical Assistance.


3RW Soft Starters

Circuit concept


The SIRIUS 3RW44 soft starters can be operated in two different types of circuit.

- **Inline circuit**
The controls for isolating and protecting the motor are simply connected in series with the soft starter. The motor is connected to the soft starter with three cables.
- **Inside-delta circuit**
The wiring is similar to that of wye-delta starters. The phases of the soft starter are connected in series with the individual motor windings. The soft starter then only has to carry the phase current, amounting to about 58 % of the rated motor current (conductor current).

Comparison of the types of circuit

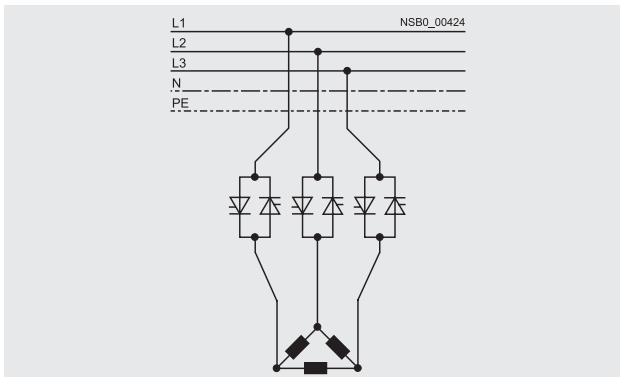

Inline circuit:
Rated current I_g corresponds to the rated motor current I_n , 3 cables to the motor

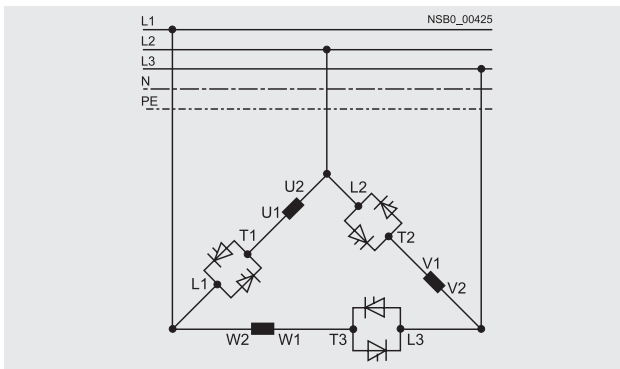

Inside-delta circuit:
Rated current I_g corresponds to approx. 58 % of the rated motor current I_n , 6 cables to the motor (as with wye-delta starters)

Which circuit?

Using the inline circuit involves the lowest wiring outlay. If the soft starter to motor connections are long, this circuit is preferable.

With the inside-delta circuit there is double the wiring complexity but a smaller size of device can be used at the same rating.

Thanks to the choice of operating mode between the inline circuit and inside-delta circuit, it is always possible to select the most favorable solution.

The braking function is possible only in the inline circuit.

Configuration

The 3RW44 solid-state soft starters are designed for normal starting. In case of heavy starting or increased starting frequency, a larger device must be selected.

For long starting times it is recommended to have a PTC sensor in the motor. This also applies for the ramp-down modes smooth ramp-down, pump ramp-down and DC braking, because during the ramp-down time in these modes, an additional current load applies in contrast to free ramp-down.

In the motor feeder between the SIRIUS 3RW soft starter and the motor, no capacitive elements are permitted (e. g. no reactive-power compensation equipment). In addition, neither static systems for reactive-power compensation nor dynamic PFC (Power Factor Correction) must be operated in parallel during starting and ramp-down of the soft starter. This is important to prevent faults arising on the compensation equipment and/or the soft starter.

All elements of the main circuit (such as fuses and controls) should be dimensioned for direct starting, following the local short-circuit conditions. Fuses, controls and overload relays must be ordered separately.

A bypass contact system and solid-state overload relay are already integrated in the 3RW44 soft starter and therefore do not have to be ordered separately.

The harmonic component load for starting currents must be taken into consideration for the selection of motor starter protectors (selection of release).

Note:

When induction motors are switched on, voltage drops occur as a rule on starters of all types (direct starters, wye-delta starters, soft starters). The infeed transformer must always be dimensioned such that the voltage dip when starting the motor remains within the permissible tolerance. If the infeed transformer is dimensioned with only a small margin, it is best for the control voltage to be supplied from a separate circuit (independently of the main voltage) in order to avoid the potential switching off of the soft starter.

Device interface, PROFIBUS DP communication module, Soft Starter ES parameterizing and operating software

The 3RW44 electronic soft starters have a PC interface for communicating with the Soft Starter ES software or for connecting the external display and operator module. If the optional PROFIBUS communication module is used, the 3RW44 soft starter can be integrated in the PROFIBUS network and communicate using the GSD file or Soft Starter ES Premium software.

The Soft Starter ES parameterizing and operating software can be downloaded from www.usa.siemens.com > Software with a 14-day trial license.

More information about Soft Starter ES can be found in Chapter 12 of Catalog LV 1.

3RW Soft Starters

3RW44 for high-feature applications

Manual for SIRIUS 3RW44

Besides containing all important information on configuring, commissioning and servicing, the manual also contains example circuits and the technical specifications for all devices.

Win-Soft Starter selection and simulation program

With this software, you can simulate and select all Siemens soft starters, taking into account various parameters such as mains properties, motor and load data, and special application requirements.

The software is a valuable tool, which makes complicated, lengthy manual calculations for determining the required soft starters superfluous.

The Win-Soft Starter selection and simulation program can be downloaded from: www.usa.siemens.com > Software

More information can be found on the Internet at: www.usa.siemens.com


3RW Soft Starters

Project Planning aids

Dimensional drawings

3RW30 for standard applications


3RW30 1. ... 3RW30 4.

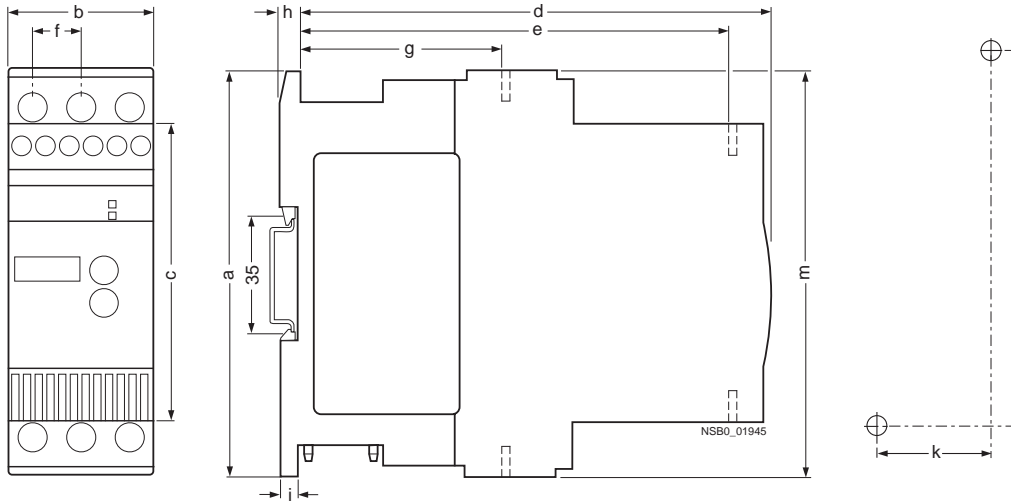


| Type/Dimension (mm) | a | b | c | d | e | f | g | h | i | k | l | m |
|---------------------|-----|----|-----|-----|-----|------|----|---|-----|----|-----|-------|
| 3RW30 1.-1. | 95 | 45 | 62 | 146 | 126 | 14.4 | 63 | 5 | 6.5 | 35 | 85 | 95 |
| 3RW30 1.-2. | 95 | 45 | 62 | 146 | 126 | 14.4 | 63 | 5 | 6.5 | 35 | 85 | 117.2 |
| 3RW30 2.-1. | 125 | 45 | 92 | 146 | 126 | 14.4 | 63 | 5 | 6.5 | 35 | 115 | 125 |
| 3RW30 2.-2. | 125 | 45 | 92 | 146 | 126 | 14.4 | 63 | 5 | 6.5 | 35 | 115 | 150 |
| 3RW30 3. | 160 | 55 | 110 | 163 | 140 | 18 | 63 | 5 | 6.5 | 30 | 150 | 144 |
| 3RW30 4. | 170 | 70 | 110 | 181 | 158 | 22.5 | 85 | 5 | 10 | 60 | 160 | 160 |

| Clearances to grounded parts (mm) | Lateral | Top | Bottom | Fixing screws | Tightening torques (Nm) |
|-----------------------------------|---------|-----|--------|---------------|-------------------------|
| 3RW30 1. | 5 | 60 | 40 | M4 | 1 |
| 3RW30 2. | 5 | 60 | 40 | M4 | 1 |
| 3RW30 3. | 30 | 60 | 40 | M4 | 1 |
| 3RW30 4. | 30 | 60 | 40 | M4 | 2 |

3RW30 03-1. (screw terminals)

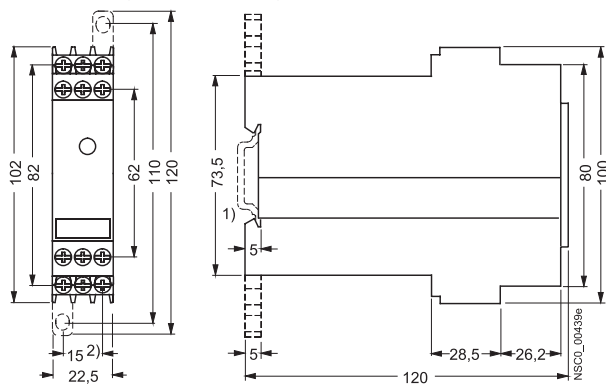

3RW30 03-2. (spring-type terminals)

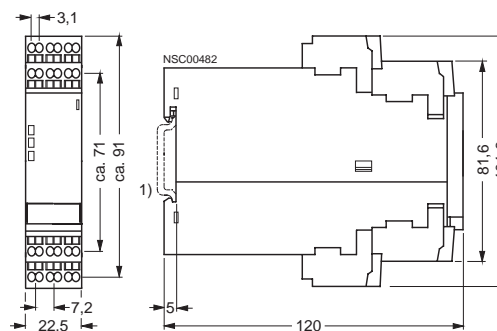


1) For mounting onto standard mounting rail TH 35 according to EN 60715.

2) Dimension for screw fixing.
Screw fixing with two 3RP1 903 push-in lugs per 3RW30 03 device.

3RW Soft Starters


Project Planning aids

3RW40 for standard applications

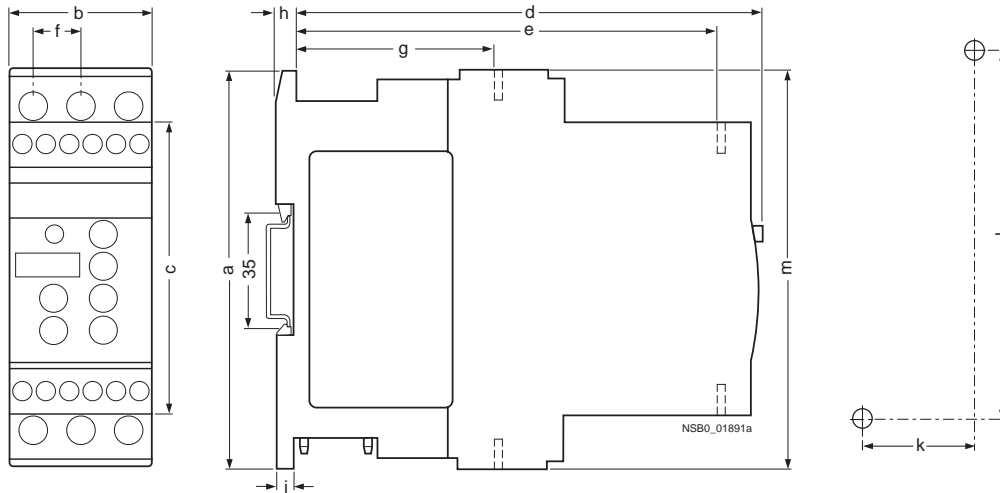

| Type/Dimension (mm) | a | b | c | d | e | f | g | h | i | k | l | m |
|---------------------|-----|----|-----|-----|-----|------|----|---|-----|----|-----|-----|
| 3RW40 2.-1. | 125 | 45 | 92 | 149 | 126 | 14.4 | 63 | 5 | 6.5 | 35 | 115 | 125 |
| 3RW40 2.-2. | 125 | 45 | 92 | 149 | 126 | 14.4 | 63 | 5 | 6.5 | 35 | 115 | 150 |
| 3RW40 3. | 170 | 55 | 110 | 165 | 140 | 18 | 63 | 5 | 6.5 | 30 | 150 | 144 |
| 3RW40 4. | 170 | 70 | 110 | 183 | 158 | 22.5 | 85 | 5 | 10 | 60 | 160 | 160 |

| Clearances to grounded parts (mm) | Lateral | Top | Bottom | Fixing screws | Tightening torques (Nm) |
|-----------------------------------|---------|-----|--------|---------------|-------------------------|
| 3RW40 2. | 5 | 60 | 40 | M4 | 1 |
| 3RW40 3. | 30 | 60 | 40 | M4 | 1 |
| 3RW40 4. | 30 | 60 | 40 | M4 | 2 |

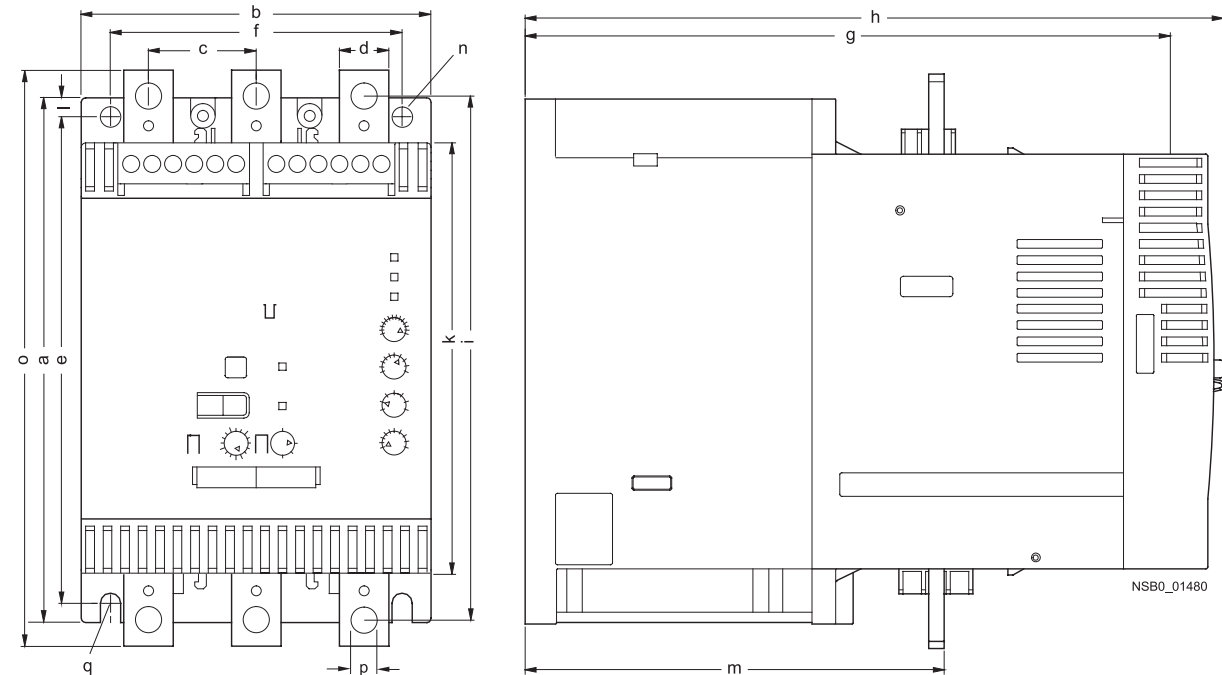


| Type/Dimension (mm) | a | b | c | d | e | f | g | h | i | k | l | m | n | o | p | q |
|---------------------|-----|-----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|---|-----|----|-----------|
| 3RW40 5. | 180 | 120 | 37 | 17 | 167 | 100 | 223 | 250 | 180 | 148 | 6.5 | 153 | 7 | 198 | 9 | M6, 10 Nm |
| 3RW40 7. | 210 | 160 | 48 | 25 | 190 | 140 | 240 | 278 | 205 | 166 | 10 | 166 | 9 | 230 | 11 | M8, 15 Nm |

3RW Soft Starters

Project Planning aids

3RW44 2., 3RW44 3. and 3RW44 4. for High-Feature applications

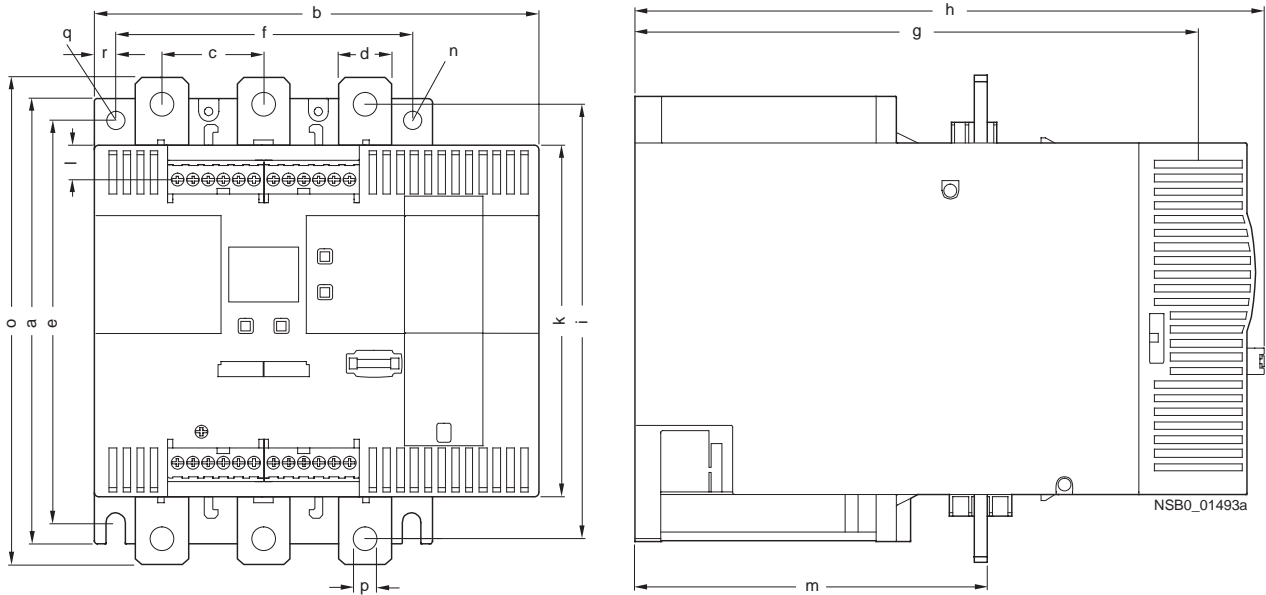


| Type/Dimension (mm) | a | b | c | d | e | f | g | h | i | k | l | m | n | o | p | q | r |
|---------------------|-----|-----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|---|-----|-----|-----------|----|
| 3RW44 2. | 180 | 170 | 37 | 11 | 167 | 100 | 240 | 270 | 174 | 148 | 7.5 | 153 | 7 | 184 | 6.6 | M6, 10 Nm | 10 |
| 3RW44 3. | 180 | 170 | 37 | 17 | 167 | 100 | 240 | 270 | 174 | 148 | 7.5 | 153 | 7 | 198 | 9 | M6, 10 Nm | 10 |
| 3RW44 4. | 210 | 210 | 48 | 25 | 190 | 140 | 269 | 298 | 205 | 166 | 16 | 166 | 9 | 230 | 11 | M8, 15 Nm | 10 |

3RW Soft Starters

Project Planning aids

3RW44 5. and 3RW44 6. for High-Feature applications

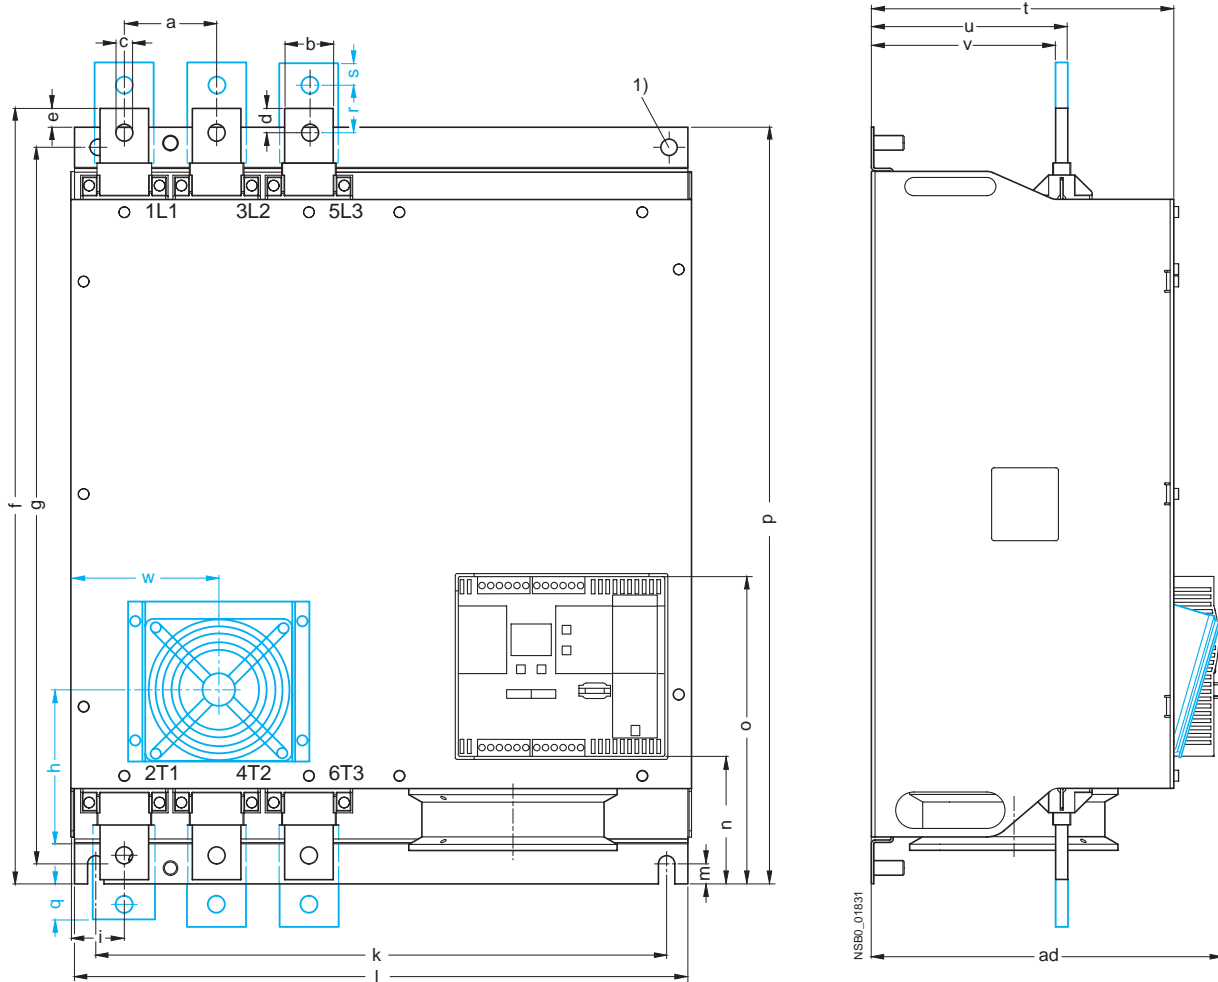




1) For M12 screw, tightening torque max. 35 Nm (310 lb.in).

| Type/Dimension (mm) | a | b | c | d | e | f | g | h | i | k | l | m |
|---------------------|----|----|----|----|------|-------|-----|-----|------|-----|-----|------|
| 3RW44 5. | 76 | 40 | 14 | 20 | 15.5 | 638.5 | 590 | -- | 44 | 470 | 510 | 16.5 |
| 3RW44 6. | 85 | 50 | 14 | -- | -- | 667 | 660 | 160 | 37.5 | 535 | 576 | 16.5 |


| Type/Dimension (mm) | n | o | p | q | r | s | t | u | v | W | ad |
|---------------------|-----|-----|-----|------|----|----|-----|-----|-------|-----|-----|
| 3RW44 5. | 105 | 253 | 623 | -- | -- | -- | 249 | 162 | 152 | -- | 290 |
| 3RW44 6. | 103 | 251 | 693 | 43.5 | 40 | 20 | 249 | 162 | 151.4 | 123 | 290 |

3RW49 00-0AC00 external display and operator module

Installation cutout for 3RW49 00-0AC00 external display and operator module



Class 73, 74

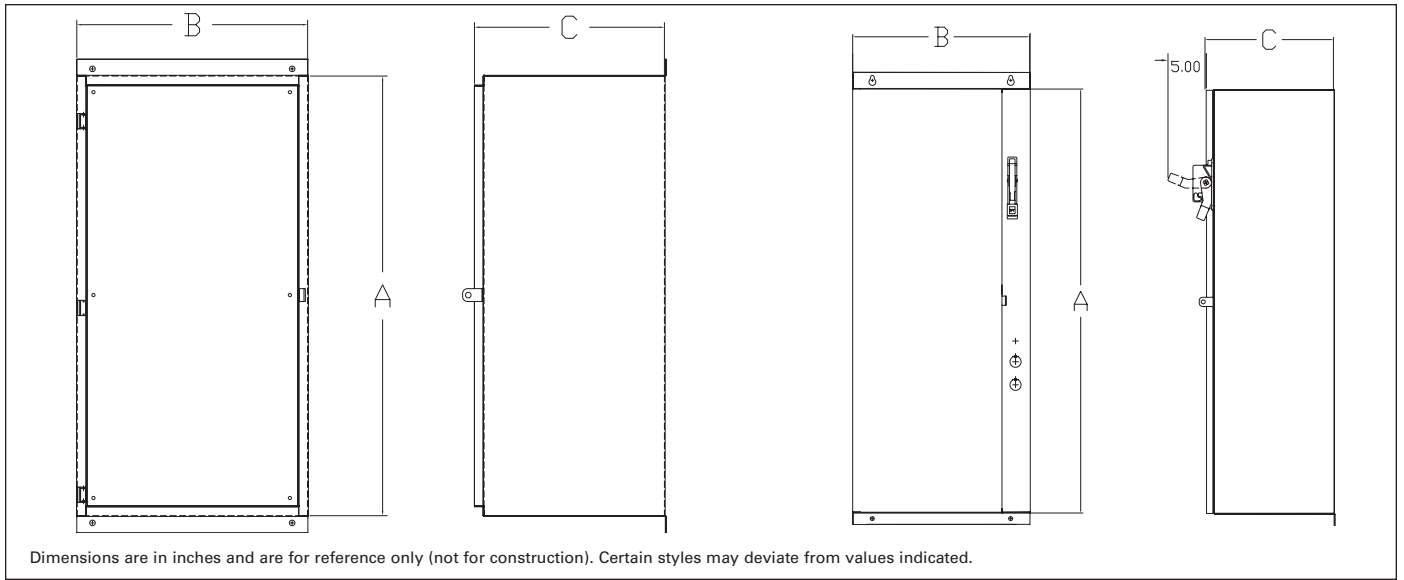

Non-Combination Class 73

N1, N3R, N12, N4 Standard Enclosure

| | Amps | A | B | C |
|----------|------------|----|------|----|
| 3RW40new | 11 - 73 | 25 | 18 | 13 |
| | 98 | 36 | 23 | 10 |
| 3RW40 | 117-145 | 36 | 18 | 15 |
| | 205-315 | 36 | 22 | 20 |
| | 385 | 54 | 36 | 20 |
| 3RW44 | 26 - 68 | 26 | 12.5 | 15 |
| | 82 - 117 | 36 | 18 | 15 |
| | 145 - 215 | 36 | 22 | 20 |
| | 280 - 385 | 54 | 36 | 20 |
| | 494 - 780 | 90 | 40 | 20 |
| | 970 - 1076 | 90 | 50 | 20 |

N4X Stainless Steel Standard Enclosure

| | Amps | A | B | C |
|----------|------------|----|------|----|
| 3RW40new | 11- 98 | 55 | 29 | 11 |
| 3RW40 | 117 | 36 | 18 | 15 |
| | 145 - 205A | 36 | 22 | 20 |
| | 248 - 385 | 54 | 36 | 20 |
| 3RW44 | 26 - 51 | 26 | 12.5 | 15 |
| | 68 - 82 | 36 | 18 | 15 |
| | 100 - 117 | 36 | 22 | 20 |
| | 145 - 385 | 54 | 36 | 20 |

N1, N3R, N12, N4 Modified Enclosure

| | Amps | A | B | C |
|-------|---------|----|----|----|
| 3RW40 | 117-385 | 56 | 36 | 20 |
| 3RW44 | 26-51 | 36 | 22 | 20 |
| | 68-385 | 54 | 36 | 20 |

N4X Stainless Steel Modified Enclosure

| | Amps | A | B | C |
|-------|---------|----|----|----|
| 3RW40 | 117-385 | 54 | 36 | 20 |
| 3RW44 | 26-51 | 36 | 22 | 20 |
| | 68-385 | 54 | 36 | 20 |

Combination Type Class 74

N1, N3R, N12, N4 Standard Enclosure

| | Amps | A | B | C |
|----------|------------|----|-----------------|----|
| 3RW40new | 11 - 73 | 36 | 20 | 11 |
| | 98 | 46 | 20 | 10 |
| 3RW40 | 117 | 50 | 25 | 20 |
| | 145 - 205 | 66 | 25 | 20 |
| | 248 - 315 | 90 | 30 | 20 |
| | 385 | 90 | 40 | 20 |
| 3RW44 | 26 - 68 | 36 | 23 | 15 |
| | 82 - 117 | 50 | 25 | 20 |
| | 145 - 215 | 66 | 25 | 20 |
| | 280 | 90 | 30 | 20 |
| | 315 - 384 | 90 | 40 | 20 |
| | 494 | 90 | 40 | 20 |
| | 551 - 780 | 90 | 40 [Ⓞ] | 20 |
| | 970 - 1076 | 90 | 50 | 20 |

N1, N12 Fusible

| | Amps | A | B | C |
|-------|---------|----|----|----|
| 3RW44 | 494-780 | 90 | 50 | 20 |

N4X Stainless Steel Standard Enclosure

| | Amps | A | B | C |
|----------|-----------|----|----|----|
| 3RW40new | 11- 98 | 55 | 29 | 11 |
| 3RW40 | 117 - 145 | 54 | 36 | 20 |
| | 205 - 300 | 90 | 40 | 20 |
| 3RW44 | 26 - 42 | 36 | 23 | 15 |
| | 51 - 100 | 50 | 25 | 20 |
| | 117 - 145 | 54 | 36 | 20 |
| | 180 - 385 | 90 | 40 | 20 |

N1, N3R, N12, N4 Modified Enclosure

| | Amps | A | B | C |
|-------|-----------|----|----|----|
| 3RW40 | 117 - 248 | 76 | 30 | 20 |
| | 315 | 90 | 30 | 20 |
| | 385 | 90 | 40 | 20 |
| 3RW44 | 26 - 215 | 76 | 30 | 20 |
| | 280 | 90 | 30 | 20 |
| | 315 - 385 | 90 | 40 | 20 |

N4X Stainless Steel Modified Enclosure

| | Amps | A | B | C |
|-------|---------|----|----|----|
| 3RW40 | 117-145 | 76 | 30 | 20 |
| 3RW44 | 26-145 | 76 | 30 | 20 |

Ⓞ Add 4" for N4.


3RW Soft Starters

Project Planning aids



Schematics

3RW30 .. connection examples for control circuit


Control using switches




Automatic mode

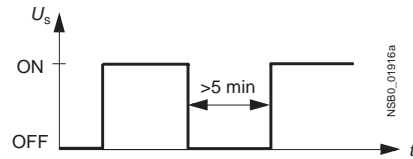

Control by pushbutton

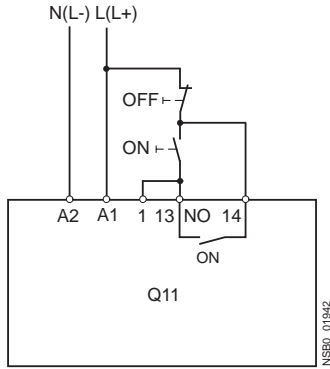


Control of a main contactor

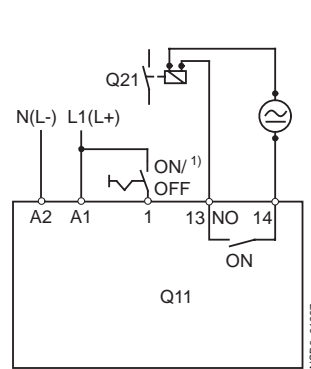


3RW30 connection examples for main circuit²⁾

3RW30 – 3-phase motor with 3NA/3NE fuse



3RV motor starter protector



1) Caution: Risk of restarting!

When operating with a switch (ON/OFF) a new, automatic restart will take place automatically if the start command is still active at terminal 1.

2) As an alternative, the motor feeder can also be installed as a fuseless or as a fused version. For fuse and switching device coordination, see "Technical specifications".


The wiring diagrams are provided only as examples.

3RW Soft Starters


Project Planning aids

3RW40 2. ... 3RW40 4. connection examples for control circuit




Control using switches




Automatic mode




Control with remote reset

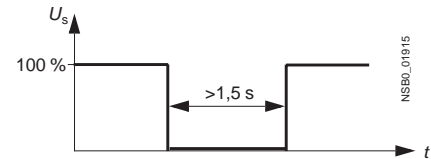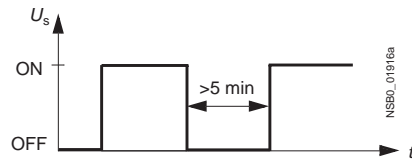

Control of 3RW40 2. ... 3RW40 4. by pushbutton

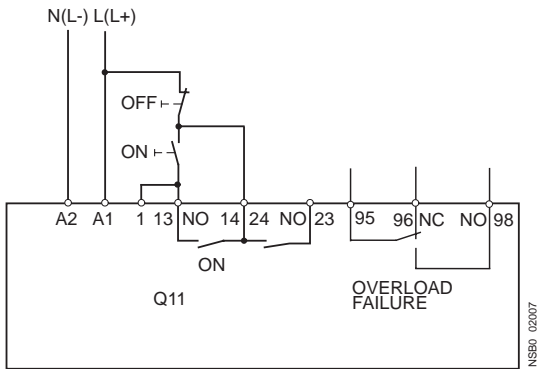


Control of a main contactor

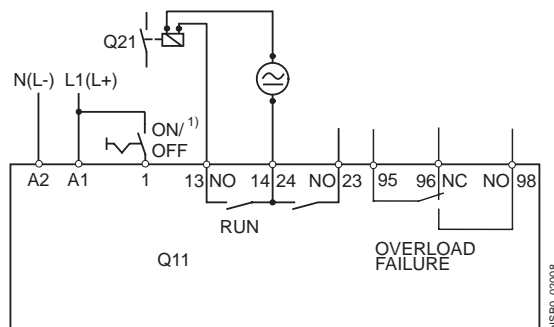


Connection example of 3RW40 2. ... 3RW40 4. for PTC sensors (thermistor motor protection)

Thermoclick



PTC type A



1) Caution: Risk of restarting!


When operating with a switch (ON/OFF) a new, automatic restart will take place automatically if the start command is still active at terminal 1.

3RW Soft Starters


Project Planning aids

3RW40 5. and 3RW40 7. connection examples for control circuit


Control by switch using internal 24 V DC supply




external power supply



Control by pushbutton

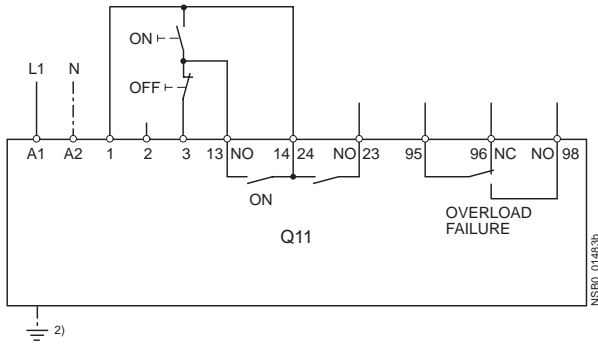


Control of a main contactor

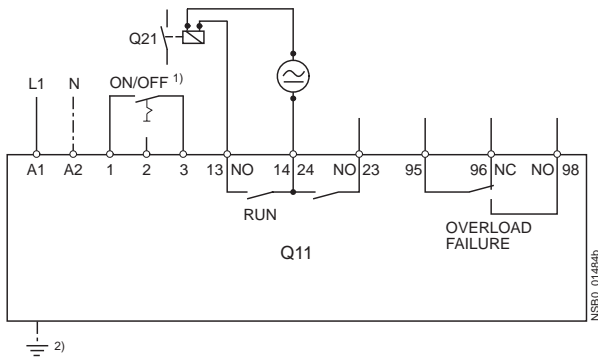


3RW40 connection examples for main circuit³⁾

3RW40 – 3-phase motor with 3NA/3NE fuse



3RV motor starter protector/ 3VL circuit breaker



1) Caution: Risk of restarting!

When operating with a switch (ON/OFF) a new, automatic restart will take place automatically if the start command is still active at terminal 3.

2) Grounding necessary for fan connection to 3RW40 5...

3) As an alternative, the motor feeder can also be installed as a fuseless or as a fused version. For fuse and switching device coordination, see "Technical specifications".

The wiring diagrams are provided only as examples.


3RW Soft Starters

Project Planning aids

3RW44 connection examples for main and control circuits


Main circuit

Possibility 1a:
Inline circuit with motor starter protector and SITOR fuse
(semiconductor protection only)

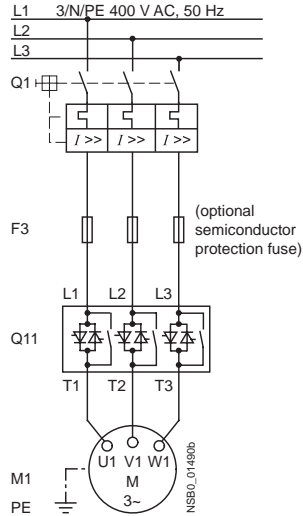


Control circuit

Possibility 1:
Control by pushbutton

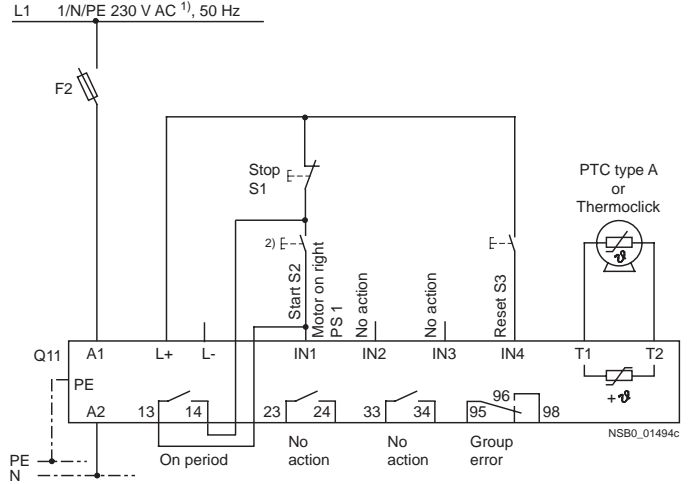


Main circuit

Possibility 1b:
Inline circuit with all-range
protection
(line and semiconductor protection)

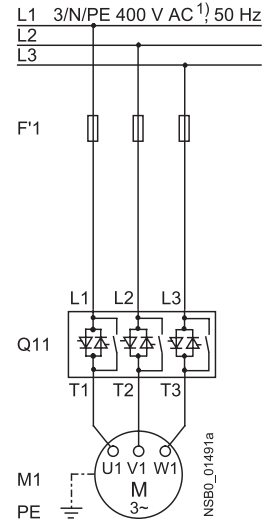

Possibility 1c:
Inline circuit with line and
SITOR fuse
(semiconductor protection only)

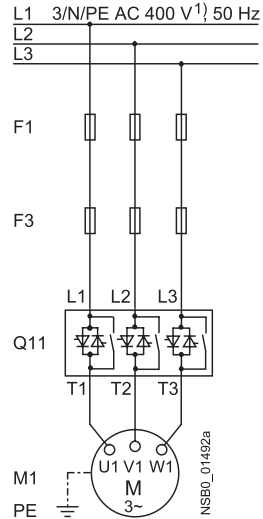

1) Permissible values for main and control voltage, see "Technical specifications".

2) **Caution: Risk of restarting!**


Because the output is parameterized to "Motor ON", the start command is automatically active after the reset command and a new, automatic restart will take place. This applies especially in case of motor protection tripping. For safety reasons we recommend connecting the group error output (terminals 95/96) in series with the output parameterized to "Motor ON".

3RW Soft Starters

Project Planning aids


Main circuit

Possibility 2:
Inline circuit with main contactor

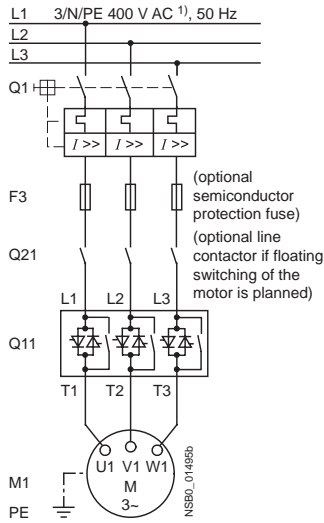

Control circuit

Possibility 2:
Control of a main contactor and control by means of PLC

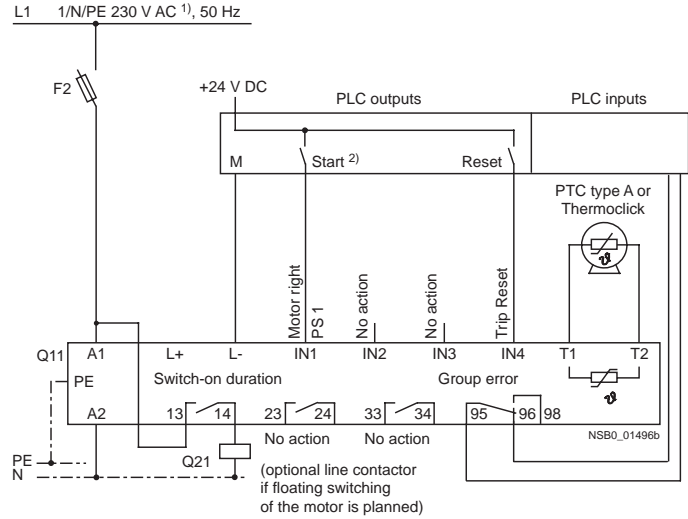

1) Permissible values for main and control voltage, see "Technical specifications".

2) **Caution: Risk of restarting!**


The start command (e. g. from the PLC) must be reset prior to a reset command because a new, automatic restart will take place automatically if a start command is active after the reset command. This applies especially in case of motor protection tripping. For safety reasons we recommend incorporating the group error output (terminals 95 and 96) in the controller.

3RW Soft Starters

Project Planning aids


Main circuit

Possibility 3a:
 Inline circuit with ramp-down function DC braking³⁾
 (for device types 3RW44 22 to 3RW44 25)

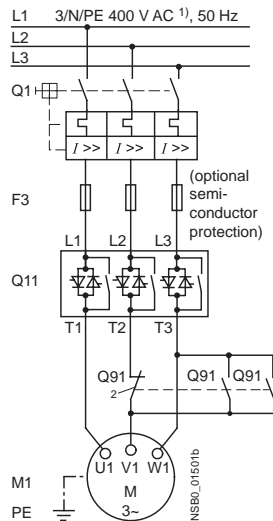


Control circuit

Possibility 3a:
 Control of the DC braking contactor³⁾

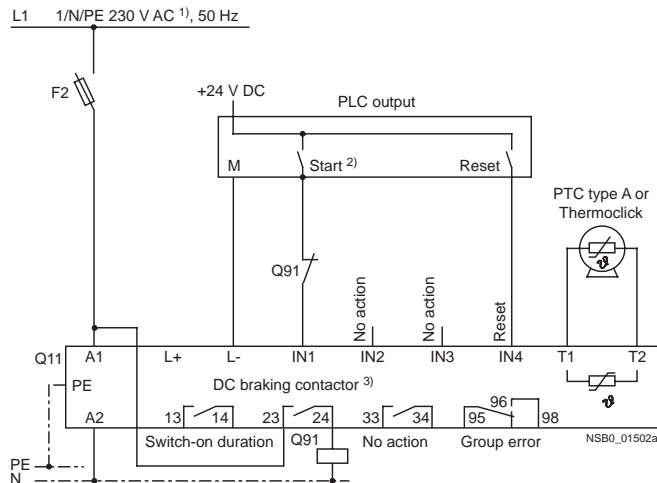


Main circuit

Possibility 3b:
 Inline circuit with ramp-down function DC braking³⁾
 (for device types 3RW44 26 to 3RW44 47)

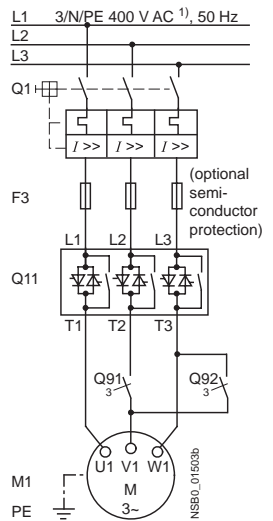

Control circuit

Possibility 3b:
 Control of the DC braking contactor³⁾

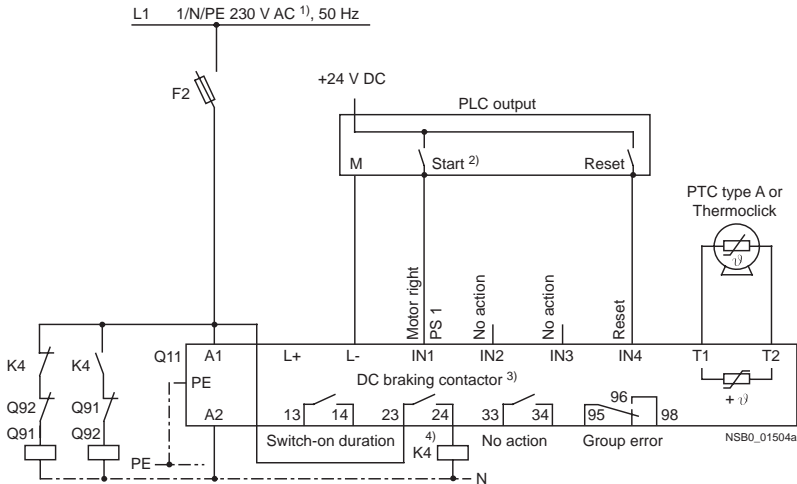

¹⁾ Permissible values for main and control voltage, see "Technical specifications".

²⁾ Caution: Risk of restarting!

The start command (e. g. from the PLC) must be reset prior to a reset command because a new, automatic restart will take place automatically if a start command is active after the reset command. This applies especially in case of motor protection tripping. For safety reasons we recommend incorporating the group error output (terminals 95 and 96) in the controller.

³⁾ If the ramp-down function "Combined braking" is selected, no braking contactor is required.

If the ramp-down function "DC braking" is selected, a braking contactor must be used in addition. For type see "Fuse Assignment (Inline Circuit)" on pages 7/47 to 7/49.

For applications with large centrifugal masses ($J_{Load} > J_{Motor}$) we recommend the function "DC braking".

The output 2 must be switched over to "DC braking contactor".

⁴⁾ Auxiliary relay K4, e. g.:


LZX:RT4A4T30 (230 V AC rated control supply voltage),
 LZX:RT4A4S15 (115 V AC rated control supply voltage).

3RW Soft Starters


Project Planning aids

Main circuit

Possibility 4a:
Inside-delta circuit

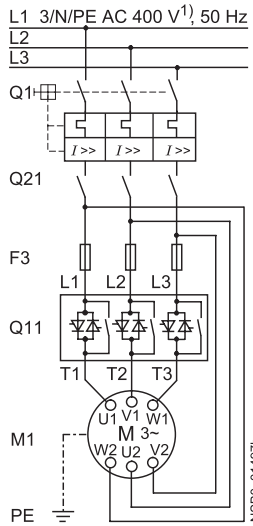


Possibility 4b:
Change of direction of rotation for
inside-delta circuit

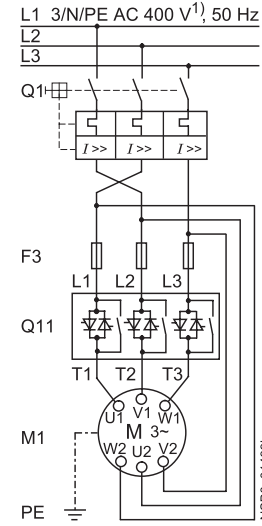

Control circuit

Possibility 4:
Control by means of PLC

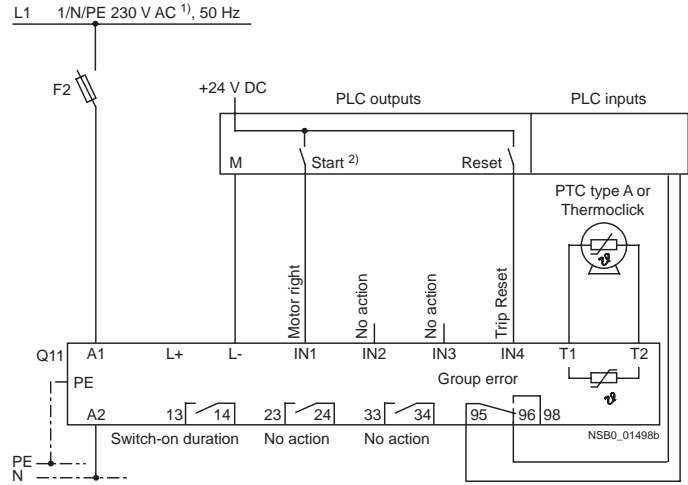

1) Permissible values for main and control voltage, see "Technical specifications".

2) **Caution: Risk of restarting!**

The start command (e. g. from the PLC) must be reset prior to a reset command because a new, automatic restart will take place automatically if a start command is active after the reset command. This applies especially in case of motor protection tripping. For safety reasons we recommend incorporating the group error output (terminals 95 and 96) in the controller.

